



AIR TOOLS CATALOG

2017 SPRING



Flavic Tools & Equipment Inc.

Add: 6F No.2 Building,
351 Changhe Road
BinJiang Area
Hangzhou 310052 P.R.China

T: (86)571-8577 1352

F: (86)571-8577 1353

www.flavictools.com

Welcome to Flavic Tools & Equipment INC.
 We are providing worldwide with the broadest selection of Hand Tools, Power Tools, Air Tools and everything related to Tools and Equipment. As one of the leading companies in China of sourcing, developing, manufacturing, and packing, we have the confidence to fit your needs no matter what you want about tools and equipment.

Since we've founded, we are doing our best to provide our customers with the lowest possible prices, friendly and extremely knowledgeable customer service, and a very diverse kind of products.

CHAMPION brand has been used since 2003. And we have achieved great success with this brand in the past years.

Aiming at providing customers with a basket of high quality tools, we have developed a top quality level of products under our new brand, **FLAVIC** which combines the **FLAV** emanates

from Yellow in Latin and **VIC** emanates from Conquer, symbolizes our confidence to achieve the best Tools and Equipment trading company in China.

Our company is located in Top Sun Science and Technology Park, in the beautiful City Hangzhou with our own warehouse, where thousands of products are on display. For guaranteeing the quality of our products, we setup a factory for professionally testing, assembling, and packing.

President, Guo'An

Guo'An

E: guoan@flavictools.com

M: (86)139-5802-0160

Flavic Tools & Equipment Inc.

Add: 6F No.2 Building,
 351 Changhe Road
 BinJiang Area
 Hangzhou 310052 P.R.China

T: (86)571-8577 1352
 F: (86)571-8577 1353
 www.flavictools.com



Air Die Grinders	Page 1-5	
Air Sanders	Page 5-9	
Air Impact Wrenches	Page 9-14	
Air Ratchet Wrenches	Page 15-17	
Air Drills & Drivers	Page 17-19	
Specialty Air Tools	Page 19-23	
Air Nailers & Staplers	Page 23-24	
Air Riveters & Nut Riveters	Page 25-26	
Air Spray & Painting Tools	Page 26-42	
Air Hoses	Page 42-45	
Air Hose Reels	Page 45-50	
Air Compressors	Page 50-55	
Air Equipments	Page 55-56	
Kits & Sets	Page 57-59	
Accessories	Page 59-71	
Others		

A01A005
Mini Air Die Grinder

- Parts interchangeable with major brands
- Front exhaust system Small size for user convenience
- Great tool for weld breaking, and smoothing sharp edges as well as deburring, polishing, and grinding

Collet	Free speed	Air consumption	Air inlet	Max air pressure
1/4"(6mm)	25000 RPM	5.5CFM	1/4"	90PSI(6.3Bar)



A01A006
1/4" Air Die Grinder

- Lightweight aluminum housing with bicolor soft grip.
- Lever block trigger for safety.
- Built-in regulator.
- Also available for 1/8"(3mm) collet (optional).
- Front exhaust helps keep work surface clean.
- Free Speed: 25000 RPM.
- Capacity: 1/4".
- Air inlet: 1/4" NPT.
- AVG.air consumption: 3.5SCFM.
- Working Pressure: 90PSI.



A01A007
Mini Air Die Grinder

- Lightweight aluminum housing
- Built-in regulator
- Used with a variety of accessories for weld breaking, smoothing sharp edges, deburring, polishing and grinding

Collet	Free speed	Air consumption	Air inlet	Max air pressure
1/4"(6mm)	25000 RPM	5.5CFM	1/4"	90PSI(6.3Bar)



A01A053
Extended Air Die Grinder

- Extended collet tube to reach deeper area or tighter space

Shaft size	Collet	Air inlet	Free speed	Air consumption	Max air pressure
3"	1/4"(6mm)	20000RPM	4.0SCFM	1/4"	90PSI(6.3Bar)



A01A055
Extended Air Die Grinder

- Extended collet tube to reach deeper area or tighter space

Shaft size	Collet	Air inlet	Free speed	Air consumption	Max air pressure
5"	1/4"(6mm)	20000RPM	4.0SCFM	1/4"	90PSI(6.3Bar)



A01A061
Extended Air Die Grinder

- Extended collet tube to reach deeper area or tighter space

Shaft size	Collet	Air inlet	Free speed	Air consumption	Max air pressure
1"	1/8"(3mm)	22000RPM	4.0SCFM	1/4"	90PSI(6.3Bar)



A01A021
Air Die Grinder

- Lightweight aluminum body
- Built-in regulator
- Used with a variety of accessories for weld breaking, smoothing sharp edges, deburring, polishing and grinding

Collet	Free speed	Air consumption	Air inlet	Max air pressure
1/4"(6mm)	22000 RPM	4.5 SCFM	1/4"	90PSI (6.3Bar)



A01A031
Air Die Grinder

- Lightweight aluminum body with Soft-touch outer coating
- Built-in regulator
- Used with a variety of accessories for weld breaking, smoothing sharp edges, deburring, polishing and grinding

Collet	Free speed	Air consumption	Air inlet	Max air pressure
1/4"(6mm)	22000 RPM	4.5 SCFM	1/4"	90PSI (6.3Bar)



A01A041
Air Die Grinder

- Exclusive composite body
- Built-in regulator
- Used with a variety of accessories for weld breaking, smoothing sharp edges, deburring, polishing and grinding

Collet	Free speed	Air consumption	Air inlet	Max air pressure
1/4"(6mm)	22000 RPM	4.5 SCFM	1/4"	90PSI (6.3Bar)



A01A063
Extended Air Die Grinder

- Extended collet tube to reach deeper area and tighter space

Shaft size	Collet	Air inlet	Free speed	Air consumption	Max air pressure
3"	1/8"(3mm)	20000RPM	4.0SCFM	1/4"	90PSI(6.3Bar)



A01A065
Extended Air Die Grinder

- Extended collet tube to reach deeper area or tighter space

Shaft size	Collet	Air inlet	Free speed	Air consumption	Max air pressure
5"	1/8"(3mm)	20000RPM	4.0SCFM	1/4"	90PSI(6.3Bar)



A01A071
1/4" Mini Extended Air Die Grinder (1"Collet Tube)

- Composite Housing.
- Safety lever trigger prevents accidental starts.
- Rear speed regulator and adjustable exhaust de ector.
- 1 inch extended collet tube to reach deeper area or tighter space.
- Rear Exhaust.
- Free Speed: 25000 RPM.
- Capacity: 1/4".
- Air Inlet: 1/4" NPT.
- AVG.air consumption: 4SCFM.
- Working Pressure: 90PSI.



A01A042
1/4" Air Die Grinder

- Lightweight aluminum housing with bicolor soft grip.
- Lever block trigger for safety.
- Built-in regulator.
- Also available for 1/8"(3mm) collet (optional).
- Used with a variety of accessories for weld breaking, smoothing sharp.
- Rear exhaust.
- Free Speed: 25000 RPM.
- Capacity: 1/4".
- Air inlet: 1/4" NPT.
- AVG.air consumption: 4SCFM.
- Working Pressure: 90PSI.



A01A043
1/4" Air Die Grinder

- Composite housing with most ergonomic design.
- Safety lever trigger prevents accidental starts.
- Adjustable rear speed regulator in 4 positions.
- 360 degree adjustable exhaust de ector.
- Rear exhaust.
- Free Speed: 25000 RPM.
- Capacity: 1/4".
- Air Inlet: 1/4" NPT.
- AVG.air consumption: 4SCFM.
- Working Pressure: 90PSI.



A01A051
Extended Air Die Grinder

- Extended collet tube to reach deeper area or tighter space

Shaft size	Collet	Air inlet	Free speed	Air consumption	Max air pressure
1"	1/4"(6mm)	22000RPM	4.0SCFM	1/4"	90PSI(6.3Bar)



A01A073
1/4" Mini Extended Air Die Grinder (3"Collet Tube)

- Composite housing.
- Safety lever trigger prevents accidental starts.
- Rear speed regulator and adjustable exhaust de ector.
- 3 Inch extended collet tube to reach deeper area or tighter space.
- Rear Exhaust.
- Free Speed: 25000 RPM.
- Capacity: 1/4".
- Air Inlet: 1/4" NPT.
- AVG.Air Consumption: 4SCFM.
- Working Pressure: 90PSI.



A01A075
1/4" Mini Extended Air Die Grinder (3"Collet Tube)

- Composite housing.
- Safety lever trigger prevents accidental starts.
- Rear speed regulator and adjustable exhaust de ector.
- 5 Inch extended collet tube to reach deeper area or tighter space.
- Rear exhaust.
- Free Speed: 25000 RPM.
- Capacity: 1/4".
- Air inlet: 1/4" NPT.
- AVG.air consumption: 4SCFM.
- Working Pressure: 90PSI.



A01A083
1/4" Mini Extended Air Die Grinder (3"Collet Tube)

- Lightweight aluminum housing with bicolor soft grip.
- Lever block trigger for safety.
- Built-in regulator.
- Also available for 1/8"(3mm) collet (optional).
- 3 Inch extended collet tube to reach deeper area or tighter space.
- Rear exhaust.
- Free Speed: 25000 RPM.
- Capacity: 1/4".
- Air inlet: 1/4" NPT.
- AVG.air consumption: 4SCFM.
- Working Pressure: 90PSI.



A01A081
1/4" Mini Extended Air Die Grinder (1"Collet Tube)

- Lightweight aluminum housing with bicolor soft grip.
- Lever block trigger for safety.
- Built-in regulator.
- Also available for 1/8"(3mm) collet (optional).
- Used with a variety of accessories for weld breaking, smoothing sharp.
- Rear exhaust.
- Free Speed: 25000 RPM.
- Capacity: 1/4".
- Air inlet: 1/4" NPT.
- AVG.air consumption: 4SCFM.
- Working Pressure: 90PSI.



A01B003 Air Angle Die Grinder

- AIR ANGLE DIE GRINDER
- Free speed RPM:10000
- Average air consumption cfm:6
- WHEEL in mm: 4" 101.6
- Exhaust:Front
- length mm in:220 8.66
- Weight Kg Lb:1.8 3.97
- Air pressure psi kg/cm: 90 6.3
- Material: ALUMINUM
- Body treatment : POLISHING
- Certificate : CE,GS



A01B007 Air Angle Die Grinders

- Paddle lever for smooth control
- Lightweight aluminum body
- Rear exhaust
- Durable ball-bearing motor



A01B011 1/4" Air Angle Die Grinder

- Composite housing with most ergonomic design.
- Safety lever trigger prevents accidental starts.
- Adjustable rear speed regulator in 4 positions.
- 360 degree adjustable exhaust deflector.
- Standard 1/4 in. or 6 mm collet optional.
- Rear Exhaust.
- Free Speed: 20000 RPM.
- Capacity: 1/4".
- Air Inlet: 1/4" NPT.
- AVG.air consumption: 4SCFM.
- Working Pressure: 90PSI.



A01B005 Air Angle Die Grinders

- Small and lightweight design provides easy operation greater access to tight spots.
- Front exhaust helps keep work surface clean
- Tool comes with 1/4" and 6 mm collets and two wrenches.



A01B008 Air Angle Die Grinders

- Paddle lever for smooth control.
- Lightweight aluminum body.
- Rear exhaust.
- Durable ball-bearing motor.



A01B017 1/4" MINI AIR DIE GRINDER (Composite Body)

- Free speed RPM:20000
- Average air consumption cfm:4
- Collet: in 1/8"
- Collet: in 1/4"
- Exhaust: Rear
- Length mm :165 in.:6.5
- Weight Kg :0.51 Lbs:1.12
- Air pressure psi : 90 kg/cm:6.3
- Body treatment: COMPOSITE (NYLON + Rubber).



A01B006 Air Angle Die Grinder

- AIR ANGLE DIE GRINDER
- Free speed RPM:10000
- Average air consumption cfm:6
- WHEEL in mm: 4" 101.6
- Angle: 90°
- Exhaust:Front
- length mm in:220 8.66
- Weight Kg Lb:1.9 4.19
- Air pressure psi kg/cm: 90 6.3
- Material: ALUMINUM
- Body treatment : POLISHING
- Certificate : CE,GS



A01B009 1/4" Air Angle Die Grinder

- Lightweight aluminum housing with bicolor soft grip.
- Angle head.
- Lever block trigger for safety.
- Built-in regulator.
- Angle head provides easy access into tight space.
- Also available for 1/8"(3mm) collet (optional).
- Rear exhaust.
- Free Speed: 20000 RPM.
- Capacity: 1/4".
- Air inlet: 1/4" NPT.
- AVG.air consumption: 3.5SCFM.
- Working Pressure: 90PSI.



A01B033 1/4" Air Angle Die Grinder

- Aluminum body with coating
- Collet Size:1/4"(6mm)
- Free Speed:20000rpm
- Air Inlet:1/4"
- Air Hose:3/8"
- Working Pressure:90psi 6.3kg/cm2
- Air Consumption:4cfm
- Accessories :
- 1PC Collet Size 3mm
- 2Pc Wrench 14mm 19mm
- 1Pc American air inlet



A01B053 2" Air Angle Sander (With Rubber Backing Pad)

- Composite Housing.
- Safety lever trigger prevents accidental starts.
- Rear speed regulator and adjustable exhaust deflector.
- 2 Inch grinding wheel included.
- Ideal for light sanding, removing rust, and smoothing welds.
- Rear Exhaust.
- Free Speed: 15000 RPM.
- Spindle Size: 1/4"-20UNF.
- Grinding Wheel: 2".
- Air Inlet: 1/4"NPT.
- AVG.air consumption: 4SCFM.
- Working Pressure: 90PSI.



A01B065 2-1/2" Air Angle Grinder (W/Thick Metal Guard, Swivel)

- Lightweight aluminum housing with bicolor soft grip.
- Black anodized angle head.
- Lever block trigger for safety.
- Grinding wheel included.
- Deal for light grinding, removing rust, and smoothing welds.
- Rear exhaust.
- Free Speed: 15000 RPM.
- Spindle Size: 1/4"-20UNF.
- Grinding Wheel: 2-1/2".
- Air inlet: 1/4"NPT.
- AVG.air consumption: 3.5SCFM.
- Working Pressure: 90PSI.



A01X009 16pc.air Die Grinder Kit(Mini)

- 1pc-nipple
- 1pc-1/4"mini air die grinder(front exhaust)
- 2pcs-hand Wrenches
- 5pcs-3mm(1/8")Mounted Grinding Stones
- 5pcs-6mm(1/4")Mounted Grinding Stones
- 1pc-3mm(1/8")collet
- 1pc-blow mold case

A01B055 2-1/2" Air Angle Grinder (W/Thick Metal Guard, Swivel)

- Composite Housing.
- Safety lever trigger prevents accidental starts.
- Rear speed regulator and adjustable exhaust deflector.
- 2.5 Inch grinding wheel included.
- Ideal for light grinding, removing rust, and smoothing welds.
- Rear Exhaust.
- Free Speed: 15000 RPM.
- Spindle Size: 1/4"-20UNF.
- Grinding Wheel: 2-1/2".
- Air Inlet: 1/4"NPT.
- AVG.air consumption: 4SCFM.
- Working Pressure: 90PSI.



A01B113 120° Air Die Grinder

- Air Inlet:1/4"
- Use Air hose size:3/8"
- Working Pressure:90psi 6.3kg/cm2
- Avg Air Consumption:28scfm



A01B063 2-1/2" Air Angle Grinder (W/Thick Metal Guard, Swivel)

- Lightweight aluminum housing with bicolor soft grip and golden.
- Black anodized angle head.
- Lever block trigger for safety.
- Use with velcro sanding discs with grit from coarse to fine.
- Ideal for light sanding, removing rust, and smoothing welds.
- Rear exhaust.
- Free Speed: 15000 RPM.
- Spindle Size: 1/4"-20UNF.
- Grinding Wheel: 2".
- Air inlet: 1/4"NPT.
- AVG.air consumption: 3.5SCFM.
- Working Pressure: 90PSI.



A01X005 16pc.air Die Grinder Kit(Mini)

- 1pc-nipple
- 1pc-1/4"mini air die grinder
- 2pcs-hand Wrenches
- 5pcs-3mm(1/8")Mounted Grinding Stones
- 5pcs-6mm(1/4")Mounted Grinding Stones
- 1pc-3mm(1/8")collet
- 1pc-blow mold case



A01X013 116pc.air Die Grinder Kit

- 1pc-nipple
- 1pc-1/4" air die grinder
- 2pcs-hand Wrenches
- 5pcs-3mm(1/8")Mounted Grinding Stones
- 5pcs-6mm(1/4")Mounted Grinding Stones
- 1pc-3mm(1/8")collet
- 1pc-blow mold case



A01X017
16pc.air Angle Die Grinder Kit



A01X021
Air Angle Die Grinder Kit



A01X025
Air Die Grinder & Cut O Tool Combo Kit




A01X029
17pc. 1/8" Air Micro Die Grinder Kit

- Easy twist on/o switch
- Twist grip throttle and exhaust
- Perfect for detailing metal work, woodwork and engraving applications
- Includes: Micro grinder with 50" hose, 2 pcs chuck wrench, coupler, inline oiler, and 10pc di shape grinding stones
- Free speed: 65,000 RPM
- Collet size: 1/8"
- Air inlet: 1/4" NPT
- Air pressure: 90PSI



A01X033
1/8"air Micro Die Ginder Kit

- Variable speed
- Rear exhaust with de ector
- Easy twist on/o switch
- Compact body is just 5/8" diameter
- Comes with 47" long 3/16" air hose, brass coupler and two wrenches
- Exhaust location Rear
- Maximum speed 56,000 RPM
- Air inlet size 1/4 in.- 18 NPT
- Collet size 1/8 in.

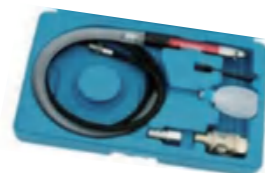

A03A009
5" D/a Palm Sander (Self-vacuuming)

- Self Generating Vacuum sanders uses the exhaust air,which is directed through a venturi, to create a vacuum at the sanding interface.
- This sander has a threaded attachment feature that allows a 1 in external threaded vacuum hose to be securely attached to the tool without having to worry about the hose becoming disconnected.
- This sander comes with Clean Sanding Filter Bag, Filter Bag Adaptor.

Item No.	Sanding Pad Dia (mm)	Free Speed (RPM)	Air Inlet (in)	Working Pressure (Avg. Air) (psi)	Consumption (CFM)
A03A009	5"	10000	1/4"	90	8.5



A03A013
6" D/A PALM SANDER(Self-Vacuuming)

- 3/16" (5mm)orbit pattern
- Ergonomic Grip
- Aluminum Alloy And Rubber Construction
- Double Axles With Eccentric Construction

Item No.	Sanding Pad Dia (mm)	Free Speed (RPM)	Air Inlet (in)	Working Pressure (Avg. Air) (psi)	Consumption (CFM)
A03A013	6"	10000	1/4"	90	8.5



A03A005
6" D/A PALM SANDER (Self-Vacuuming)

- Low vibration, lightweight and ergonomic design
- 3/16" (5mm)orbit pattern
- Uses Vinyl pads for PSA paper or Velcro pads for velcro disk
- Ideal for producing ne nishes on wood, metal, berglass and other compound materials
- Rear exhaust

Item No.	Sanding Pad Dia (mm)	Free Speed (RPM)	Air Inlet (in)	Working Pressure (Avg. Air) (psi)	Consumption (CFM)
A03A005	6"	10000	1/4"	90	8.5



A03B005
5" D/a Palm Sander

- Low vibration, lightweight and ergonomic design 3/32"orbit pattern
- Uses Vinyl pads for PSA paper or Velcro pads for velcro disk
- Ideal for producing ne nishes on wood, metal, berglass and other compound materials



A03B007
5" Orbital Palm Sander

- Aluminum housing.
- Minimized hand vibration.
- Light weight low pro le design.
- Smooth, swirl-free nishes.
- Speed:10000rpm.
- Air Consumption:3.5cfm.
- Pad Size:5".
- Orbit Dia.:2.5mm / 5mm Weight:2.05lbs/ 0.93kg.
- Air Inlet:1/4".
- Pressure:90psi.
- Spindle Thread:5/16"-24UNF.



A03C013
6" D/a Air Sander

- Deal for automotive sanding projects
- Dual action design provides swirl-free nishes
- Built-in regulator allows speed control during delicate applications
- Rubber grip for increased comfort
- Professional quality
- Quiet, random sanding action for smooth, pattern-free nish



A03E005
3/8" AIR BELT SANDER

- Belt Size : 3/8" x 13" (10 mm x 330 mm)
- Multiposition sanding belt rotates 360
- High speed 18,000 rpm drive wheel for fast stock removal
- Heavy duty cast aluminum housing
- Paddle throttle with safety trigger
- Easy belt tensioning adjustment
- Built-in regulator
- Includes: 60, 80, 120 grit sanding belts and hex key
- Required CFM: 7 CFM @ 90 PSI
- Air inlet size: 1/4 in.-18 NPT



A03C005
6" d/a disc sander

- Dual-action pad motion creates a swirl-free nish
- Adjustable thumb screw regulator for precise speed control
- Cushion-grip vinyl handle and housing cover
- Lightweight cast aluminum housing
- Pad motion resists loading for better nishes and less heat build-up
- Balanced ball bearing motor for low vibration

Item No.	Sanding Pad Dia (mm)	Free Speed (RPM)	Air Inlet (in)	Working Pressure (Avg. Air) (psi)	Consumption (CFM)
A03C005	6"	10000	1/4"	90	8.5



A03D005
Jitterbug Orbital Air Sander

- Paddle trigger
- Compact palm grip
- Vibration-free
- Built-in regulator
- Required CFM: 8.5 CFM @ 90 PSI
- Air inlet size:1/4 in.-18NPT
- 3-1/2" x 6-1/2" Jitterbug Orbital Air Sander
- This orbital air sander, with its vibration-free 9,400 orbits per minute.
- The air sander features a compact palm grip that lets you reach tight spots easily, a paddle trigger and a built-in regulator.
- The air sander also has a fully shielded radial bearing to extend its service life.



A03E009
3/4" AIR BELT SANDER

- Belt Size 3/4"x20-1/2"
- Multiposition sanding belt rotates 360
- High speed 18,000 RPM drive wheel for fast stock removal
- Heavy duty cast aluminum housing Paddle throttle with safety trigger
- Easy belt tensioning adjustment
- Built-in regulator
- Includes: 60, 80, 120 grit sanding belts and hex key
- Required CFM: 7 CFM @ 90 PSI
- Air inlet size: 1/4 in.-18 NPT



A03C009
6" D/a Air Sander

- Deal for automotive sanding projects
- Dual action design provides swirl-free nishes
- Built-in regulator allows speed control during delicate applications
- Rubber grip for increased comfort

Item No.	Sanding Pad Dia (mm)	Free Speed (RPM)	Air Inlet (in)	Working Pressure (Avg. Air) (psi)	Consumption (CFM)
A03C009	6"	10000	1/4"	90	8.5



A03D009
Straightline Air Sander

- Dual piston: up to 3000 strokes per minute
- 1" stroke sands large areas fast
- Tensioned spring clamps for easy paper changes
- Pad size: 2-3/4" W x 15-3/4" L
- Required pressure:90 PSI
- Paddle trigger
- Required CFM: 6 CFM @ 90 PSI
- Air inlet size:1/4 in.-18 NPT



A03E031
Air Belt Sander 10*330mm

- The material : Aluminum alloy
- Belt size:10*330mm
- Free speed:14000RPM
- Air Inlet:1/4"
- Working pressure:90psi 6.3kg/cm2
- Avg Air consumption:28cfm
- Net weight:0.8kg



A03E033
Air Belt Sander 1/2 X 18" 10 X330mm

- Belt Size:10*330mm
- Free Speed:14000RPM
- Air Inlet:1/4"
- Air hose:3/8"
- Working Pressure:90psi 6.3kg/cm2
- Avg Air Consumption:28scfm



A03E035
AIR BELT SANDER 3/4x18"
20 x 330MM

- Belt Size:20*330mm
- Free Speed:16000RPM
- Air Inlet:1/4"
- Air hose:3/8"
- Working Pressure:90psi
- Avg Air Consumption:28scfm



A03E053
AIR BELT SANDER 1-1/4x18"
30x330MM

- Belt Size:30*330mm
- Free Speed:11000RPM
- Air Inlet:1/4"
- Air hose:3/8"
- Working Pressure:90psi
- Avg Air Consumption:28scfm



A03E083
AIR BELT SANDER(Light Type)
2-1/2 x 10" 60x260mm

- Belt Size:60*260mm
- Free Speed:6000RPM
- Air Inlet:1/4"
- Use Air hose size:3/8"
- Working Pressure:90psi
- Avg Air Consumption:28scfm
- Net Weight:1450g



A03E085
60mm AIR BELT SANDER
(Heavy Type) 2-1/2 x 10"
60x260mm

- Belt Size:60*260mm
- Free Speed:6000RPM
- Air Inlet:1/4"
- Use Air hose size:3/8"
- Working Pressure:90psi
- Avg Air Consumption:28scfm
- Net Weight:1700g



A03F005
2"/3" Air Angle Sander

- Rear Exhaust
- Durable and lightweight die cast aluminium body
- Lever block trigger for safety and easy start
- 2"/3" Velcro pad Vinyl pad optional
- Ideal for light sanding jobs,removing rust and smoothing welds

Item No.	Sanding Pad Free Speed			Air Inlet	PSI	Avg Air Consumption	Net Weight
	2"	3"	4"				
A03F005	215	1517	1910	1/4"	90	6.3	4



A03F009
2"/3" Air Angle Sander

- Finishing of flat surfaces, curved surfaces, and corner can be freely performed by changing the shoe.
- It is small, lightweight, and balanced so that the grinding surface is stable, extremely refinishing is possible.
- The grinding speed can be freely adjusted by raising or lowering the lever according to the application.
- Rear exhaust eliminates grinding dust and noise.

Item No.	Sanding Pad Free Speed			Air Inlet	PSI	Avg Air Consumption	Net Weight
	2"	3"	4"				
A03F009	215	1517	1910	1/4"	90	6.3	4



A03F011
3" Air Angle Sander 16000rpm

- 3" air sander
- Sanding disc (or pad) size: 3" (quote with 1pc 3" sanding disc or 3" pad)
- Free speed: 16000RPM
- Air inlet: 1/4"
- Air hose: 3/8"
- Working pressure: 90PSI
- AVG. air consumption: 28CFM
- Overall length: 23cm
- Weight: 0.775kg
- Material: aluminum head + PA handle



A03F013
3" Air Angle Sander 20000rpm

- 3" air sander
- Pad size: 3" (quote with 1pc 3" pad)
- Free speed: 20000rpm
- Air inlet: 1/4"
- Air hose: 3/8"
- Working pressure: 90psi
- AVG. air consumption: 3.5cfm
- Overall length: 195mm
- Weight: 0.65kg
- Shell material: PA



A03F020
5" High Speed Air Sander

- Polish lightweight aluminum housing,
- Comes with backing plate, two wrenches and paper/ fiber backing disc, 3", 4" and 5-1/2" pads.
- Sanding pad adapter
- Required pressure: 90 PSI
- Average air consumption: 4 CFM 1/4" NPT air inlet 18,000 RPM max.



A03F025
7" Vertical Air Polisher/sander

- Variable speed throttle
- Compact, powerful air motor
- Dual handles for optimal control
- Comfort grips
- Side exhaust with deflector
- Lightweight - just
- Maximum speed (rpm)2300 RPM
- Air inlet size 1/4 in.-18



A03F045
4" Air Angle Grinder

- This angle grinder is ideal for cutting and shaping your metal work pieces quickly and efficiently.
- A contoured throttle lever provides superior control for applications from feather edging to full
- Speed grinding.
- No load speed: 10,000 RPM
- Required CFM: 6 CFM @ 90 PSI
- Diameter: 4 in.
- Exhaust location: Front
- Maximum speed (rpm):10,000 RPM



A03Y005
Pad Choice

Item No.	Pad Size		Type
	In.	mm	
A03Y005	5	125	VELCRO FACE
A03Y006	6	150	VELCRO FACE
A03Y007	5	125	VELCRO FACE
A03Y008	6	150	VELCRO FACE
A03Y100	5	125	VINYL FACE W/ HOLES
A03Y101	6	150	VINYL FACE W/ HOLES
A03Y150	5	125	VELCRO FACE W/ HOLES
A03Y200	6	150	VELCRO FACE W/ HOLES
A03Y009	2	50	VINYL FACE
A03Y010	3	75	VINYL FACE

PAD CHOICE:



A03F029
7" Heavy-duty Air Sander

- 5,000 rpm free speed
- Ball bearing construction for longer life
- Right or left hand mountings standard
- Built-in speed regulator for variable speed control
- Automatic release trigger with positive stop action
- Mounted rear exhaust Disc Size (inches): 7
- Air Consumption (CFM): 11.0
- Air Inlet (inches NPT): 1/4
- Free Speed (rpm): 5,000 Length (inches): 14-3/4



A03F055
7" Angle Grinder

- Designed as light weight powerful tool for tough, tight, quarter.
- Cleaning jobs that fast metal removal.
- Aluminum alloy housing for light weight and operator comfort.
- Lever throttle for positive speed control and safe operation.
- Wheel Size : 7" spindle.
- Thread : 5/8"-11.
- Max Speed : 7,000 rpm.
- Net Weight : 6.71lbs/3.05 kg.
- Length : 13.4"/340 mm.
- Air Consumption : 5.0cfm.
- Air Inlet : 3/8".
- Pressure:90psi.



A03Y400
7" Backing Pad W/velcro

- Disc: 7"
- Velcro pad: 6"
- Screw size: 5/8"-11
- Max. speed: 3000 rpm
- With a plastic locating pin



A03F035
4" Professional Air Angle Grinder

- Safety lever trigger.
- Built-in regulator
- Auxiliary side handle for greater comfort and control.
- Complete with governor mechanism.
- Designed for removing rust and smoothing welds.
- Front exhaust.
- Grinding disc:5" Free speed:10000rpm
- Spindle size:3/8"-24UNF or 5/8"-11UNC or M10x1.5
- Air inlet:1/4" Air hose:3/8"
- Avg. air consumption:6.5cfm
- Working pressure:90Psi, 6.3Bar



A03X811
Headlight Lens, Metal And Wheel Polishing Kit

- Air Buffer Tool:
Free Speed: 2500rpm
Working Air Pressure: 90psi
Air Consumption: 4cfm
Air Inlet: 1/4" NPT
Overall Length: 8-1/4" (210mm)
Net Weight: 2.0lb (910g)
Air Hose I. D. Size: 3/8" (10mm)
- 2" & 3" 100% Cotton Tapered Buffer: Great for Tight, Recessed Area
- 3" & 4" Scuff Mushroom Shaped Buffer: For Removing Clear Coats & Smoothing out rough metals
- 3" & 4" 100% Cotton Mushroom Shaped Buffer: For Buffering in Tight Quarters and recessed areas
- 2" 100% Cotton Drum Buffer: Great for Flat Surfaces & Wheel Rim Edges
- Brown Rouge: Great for Mild Metal, Aluminum, Pewter, Pot Metals, Brass, Copper, etc...
- White Rouge: Perfect for Bringing the Shine out on all Metal
- Blue Rouge: Perfect for Headlamp Covers and other Plastics



A03Y700
4" Ventilated Back Pad

- Use with highest quality nylon, Flexible.
- Fit with all kinds of electric and pneumatic angle grinders.
- Can reduce more heat than normal Angle grinder pad.
- Size: PAD 4" M10x1.25



A03Y911
20pc Deluxe Polishing Kit

- Kit includes 6 compounds, 2 spiral sewn
- 3 loose wheel, 4 mushroom buff, 5 felt bu bobs.
- Bu and polish everything from plastic to gold with our new and improved delux epolishing kit.
- An assortment of buffing wheels and polishing compounds are included for polishing plastic and producing a mirror like nish on most metals



A05A013
1/2" Air Impact Wrench (Twin Hammer)

FREE SPEED RPM	AVERAGE AIR CONSUMPTION	MAX TORQUE	WEIGHT	BOLT CAPACITY	AIR INLET
7500	6.5	800	1.2	1/4"	1/4"



A05A123
1/2" Air Impact Wrench (Twin Hammer)

- 1/2" IMPACT WRENCH
- Max torque: 340N/M, 250FT/LB
- Free speed: 7500RPM
- Air pressure: 90psi, 6.3kg/cm2
- Average air consumption: 4 cfm



A03Y705
5" Ventilated Back Pad

- Use with highest quality nylon, Flexible.
- Fit with all kinds of electric and pneumatic angle grinders.
- Can reduce more heat than normal Angle grinder pad.
- Size: PAD 5" 5/8"-11



A05A005
1/2" Air Impact Wrench

FREE SPEED RPM	AVERAGE AIR CONSUMPTION	MAX TORQUE	WEIGHT	BOLT CAPACITY	AIR INLET
7500	6.5	800	1.2	1/4"	1/4"



A05A017
1/2" Air Impact Wrench (Twin Hammer)

FREE SPEED RPM	AVERAGE AIR CONSUMPTION	MAX TORQUE	WEIGHT	BOLT CAPACITY	AIR INLET
7500	6.5	800	1.2	1/4"	1/4"



A05A125
1/2" Composite Air Impact Wrench Twin Hammer

- Max Torque: 885 ft/lb (1200n.m) Working Torque: 450 ft-lbs (610 N-m)
- Free speed: 7500RPM
- Air pressure: 90psi 6.3kg/cm2
- Average air consumption: 6.5 scfm
- Bolt Capacity: 5/8"(16mm)
- Air inlet: 1/4"
- Clutch type: twin hammer
- Housing material: composite plastic



A03Y710
7" Ventilated Back Pad

- Use with highest quality nylon, Flexible.
- Fit with all kinds of electric and pneumatic angle grinders.
- Can reduce more heat than normal Angle grinder pad.
- Size: PAD 7" 5/8"-11



A05A009
1/2" Air Impact Wrench (Twin Hammer)

- Finishing of flat surfaces, curved surfaces, and corner can be freely performed by changing the shoe.
- It is small, lightweight, and balanced so that the grinding surface is stable, extremely re nishing is possible.
- The grinding speed can be freely adjusted by raising or lowering the lever according to the application.
- Rear exhaust eliminates ying dust and noise.



A05A021
1/2" Impact Wrench (Twin Hammer)

- Free speed RPM:7500
- Average air consumption cfm:5
- Max torque N-M :750 FT-LB:560
- Bolt capacity mm:18 in. 3/4 "
- Exhaust: Handle
- length mm:197 in.7.76
- Weight Kg :2.42 Lbs:5.32
- Air pressure psi : 90 kg/cm:6.3
- Body treatment: COMPOSITE (NYLON + Rubber) + ALUMINIUM.



A05A153
1/2" Twin Hammer Composite

- 1/2" Twin Hammer
- Free Speed: 9800RPM
- Max Torque: 600N.M
- Air pressure: 6-8kg/cm2
- Bolt capacity: 13mm
- Air Inlet:1/4"
- Momet Bound: 200-500nm
- Shell Material: Composites



A05A213
1/2"mini Air Impact Wrench Twin Hammer

- The material: Aluminum alloy
- Air inlet:1/4"
- Free speed :8000RPM
- Max Torque:380ft/lb
- Work torque:300-360ft/lb
- Working pressure:90psi 6.3kg/cm2
- Net weight:1.6kg



A05B009
3/4" Air Impact Wrench (Twin Hammer)

FREE SPEED RPM	AVERAGE AIR CONSUMPTION	MAX TORQUE	WEIGHT	BOLT CAPACITY	AIR INLET
4600	9	1600	2.4	3/4"	1/4"



A05A155
1/2" Twin Hammer Composite Air Impact Wrench

- 1/2" Twin Hammer
- Free Speed: 8000RPM
- Max Torque: 800N.M
- Air pressure: 6-8kg/cm2
- Bolt capacity: 16mm
- Air Inlet:1/4"
- Momet Bound: 200-700nm
- Shell Material: Composites



A05A215
1/2"Mini Air Impact Wrench (Twin Hammer)

- The material: Aluminum alloy
- Air inlet:1/4"
- Free speed :7500RPM
- Max Torque:520N.M
- Working pressure:90psi 6.3kg/cm2
- Capacity bolt dia:16mm
- Net weight:1.75kg
- Features:
 - (1) Under the exhaust silencer, can reduce the noise in the use of the machine.
 - (2) Adjustable intake air can be adjusted at any time intake size
 - (3) Rocker switch can be one-handed conversion of positive and negative switch,the use of more simple.



A05B013
3/4" Heavy Duty Air Impact Wrench(Twin Hammer)

FREE SPEED RPM	AVERAGE AIR CONSUMPTION	MAX TORQUE	WEIGHT	BOLT CAPACITY	AIR INLET
4600	9	1600	2.4	3/4"	1/4"



A05A157
1/2" Twin Hammer Composite Air Impact Wrench

- 1/2" Twin Hammer
- Free Speed: 6800RPM
- Max Torque: 850N.M
- Air pressure: 6-8kg/cm2
- Bolt capacity: 18mm
- Air Inlet:1/4"
- Momet Bound: 200-700nm
- Shell Material: Composites



A05B005
3/4" AIR IMPACT WRENCH

- 3/4" IMPACT WRENCH(ROCKING DOG)
- Free Speed:4800RPM
- Max torque: 500N-M,368FT-LB
- Clutch Type:Rocking Dog
- Bolt capacity:19mm
- Exhaust:Handle
- Air pressure:90PSI ,6.3kg/m2



A05B017
3/4" Heavy Duty Air Impact Wrench (Twin Hammer)

- 3/4" Air Impact Wrench(Twin Hammer)
- Free speed RPM:4600
- Average air consumption cfm:9
- Max torque N-M FT-LB:1600 1180
- Bolt capacity mm in:33 1-1/3 "
- Exhaust: Front
- Air pressure psi kg/cm: 90 6.3



A05B021
3/4" Heavy Duty Air Impact Wrench(Twin Hammer)

- Use with highest quality nylon, Flexible.
- Fit with all kinds of electric and pneumatic angle grinders.
- Can reduce more heat than normal Angle grinder pad.
- Size: PAD 4" M10x1.25

FREE SPEED	AVERAGE AIR CONSUMPTION	MAX TORQUE	SQUARE DRIVE	BOLT CAPACITY	AIR PRESSURE	ANVIL LENGTH
2000	1.2	1600	3/4"	1.54	110	8"



A05B033
3/4" Air Impact Wrench (Twin Hammer)

- The material: Aluminum alloy
- Air inlet:3/8"
- Free speed :4600RPM
- Max Torque:1600N.M
- Work torque:1400-1580N.M
- Working pressure:90psi 6.3kg/cm2
- Capacity bolt dia:33mm
- Net weight:7.3kg



A05B123
3/4" Twin Hammer Composite Air Impact Wrench

- Use with highest quality nylon, Flexible.
- Fit with all kinds of electric and pneumatic angle grinders.
- Can reduce more heat than normal Angle grinder pad.
- Size: PAD 7" 5/8"-11



A05C029
1" Heavy Duty Air Impact Wrench

FREE SPEED	AVERAGE AIR CONSUMPTION	MAX TORQUE	SQUARE DRIVE	BOLT CAPACITY	AIR PRESSURE	ANVIL LENGTH
2000	1.2	1600	1"	1.54	110	8"



A05D005
1" Air Impact Wrench

FREE SPEED	AVERAGE AIR CONSUMPTION	MAX TORQUE	SQUARE DRIVE	BOLT CAPACITY	AIR PRESSURE	ANVIL LENGTH
2000	1.2	1600	1"	1.54	110	8"



A05C003
1" Air Impact Wrench

- Rated No Load Speed:4800r.p.m
- Capacity Bolt Dia: 41mm
- Air Pressure: 110--145psi
- Air Inlet:1/2"NPT
- Anvil Length:1.5" / 6"
- Maximum Torque:1800N-m
- Net Weight:7.3 kg (16lbs)
- Square dirve: 1"
- pin hammer
- pc packing: *1pc-1" air impact wrench
- *1pc-hex key wrench *1pc-handle
- *1pc-nipple *1pc-oil pot *1pc- box
- kit packing: *1pc-1" air impact wrench
- *2pcs-1" socket (1-1/2",1-5/8")
- *1pc-hex key wrench *1pc-handle
- *1pc-nipple *1pc-oil pot
- *1pc- blow mold case.



A05C005
1" Air Impact Wrench

- 1" EXTENDED ANVIL AIR IMPACT WRENCH
- Free speed RPM:4200
- Average air consumption cfm:15
- Max torque N-M FT-LB:2180 1602
- Bolt capacity mm:41
- Working pressure Mpa:0.8-1.4
- Air Inlet:1/2"



A05C013
1" Air Impact Wrench

FREE SPEED	AVERAGE AIR CONSUMPTION	MAX TORQUE	SQUARE DRIVE	BOLT CAPACITY	AIR PRESSURE	ANVIL LENGTH
2000	1.2	1600	1"	1.54	110	8"



A05C009
1" Air Impact Wrench

FREE SPEED	AVERAGE AIR CONSUMPTION	MAX TORQUE	SQUARE DRIVE	BOLT CAPACITY	AIR PRESSURE	ANVIL LENGTH
2000	1.2	1600	1"	1.54	110	8"



A05C021
1" Air Impact Wrench

FREE SPEED	AVERAGE AIR CONSUMPTION	MAX TORQUE	SQUARE DRIVE	BOLT CAPACITY	AIR PRESSURE	ANVIL LENGTH
2000	1.2	1600	1"	1.54	110	8"



A05C007
1" Long Shank Air Impact Wrench

- 1" Square Dr, Long Shank, Pin-Hammer.
- Max Torque: 1900 Ft./Lbs. (2576Nm).
- Free Speed: 4000 RPM.
- Average Air Consumption: 12.0 CFM.
- Air Pressure: 90 PSI (6.3 KG/CM).
- Minimum Hose Diameter: 1/2".
- 1/2" NPT Air Inlet.
- Bolt Capacity: M41.
- Weight 26.2 Lbs.



A05C017
1" Impact Wrench(Twin Hammer)

FREE SPEED	AVERAGE AIR CONSUMPTION	MAX TORQUE	SQUARE DRIVE	BOLT CAPACITY	AIR PRESSURE	ANVIL LENGTH
2000	1.2	1600	1"	1.54	110	8"



A05C025
1" Heavy Duty Air Impact Wrench

FREE SPEED	AVERAGE AIR CONSUMPTION	MAX TORQUE	SQUARE DRIVE	BOLT CAPACITY	AIR PRESSURE	ANVIL LENGTH
2000	1.2	1600	1"	1.54	110	8"



A05D007
1" Air Impact Wrench (Single hammer)

- The material: Aluminum alloy
- Hammer mechanism:Single hammer
- Air inlet:1/2"
- Free speed :4800rpm
- Capacity bolt dia:41mm
- Max.Torque:1800N.M
- Air pressure:8-10kg/cm2
- Net weight:7.6kg



A05D123
1" Twin Hammer Composite Air Impact Wrench

- 1" Twin Hammer
- Free Speed: 4200RPM
- Max Torque: 2000N.m
- Air pressure: 6-8kg/cm2
- Bolt capacity: 30mm
- Air Inlet:3/8"
- Momet Bound: 500-1600nm
- Shell Material: Composites



A05C053
Pinless 1" Air Impact Wrench With 6in Anvil

- Air Inlet 1/2" NPTF
- Air Consumption 10 CFM
- Free Speed 4,000 rpm
- Length 22.5 in.
- Max Torque 1,600 ft-lbs
- Min Hose Size 1/2" ID
- Sound Level 98.8 dbA"
- Produces 1,600 ft-lbs of ultimate torque
- 6" extended anvil is ideal for access to truck & tractor wheel lugs
- Three forward and three reverse power settings
- D-handle design with side handle ensures operator control
- Side exhaust directs air away from the worker



A05D011
1" Heavy Duty Air Impact Wrench(Twin Hammer)

- Free speed RPM:4600
- Average air consumption cfm:9
- Max torque N-M FT-LB:1600 1180
- Bolt capacity mm in:41 1-1/2"
- Exhaust: FRONT
- Air pressure: 90PSI 6.3kg/cm2



A05E005
3/8" Air Impact Wrench

- 3/8" IMPACT WRENCH
- Free Speed:10000RFM
- Max torque: 176N-M,130FT-LB
- Clutch Type:Rocking Dog
- Bolt capacity:10mm
- Exhaust:Front
- Air pressure:90PSI ,6.3kg/m2



A05D003
1" Air Impact Wrench

- Rated No Load Speed:4800r.p.m
- Capacity Bolt Dia: 41mm
- Air Pressure: 110--145psi
- Air Inlet:1/2"NPT
- Anvil Length:1.5" / 6"
- Maximum Torque:1800N-m
- Net Weight:7.3 kg (16lbs)
- Square dirve: 1"
- Pin hammer
- pc packing: *1pc-1" air impact wrench
- *1pc-hex key wrench *1pc-handle
- *1pc-nipple
- *1pc-oil pot *1pc- box



A05D035
1" Air Impact Wrench (Twin Hammer)

- The material: Aluminum alloy
- Air inlet:3/8"
- Free speed :4600RMP
- Max Torque:1600N.M
- Work torque:1400-1580N.M
- Working pressure:90psi 6.3kg/cm2
- Capacity bolt dia:33mm
- Net weight:7.3kg



A05E006
1" Air Impact Wrench (Twin Hammer)

FREE SPEED	AVERAGE AIR CONSUMPTION	MAX TORQUE	SQUARE DRIVE	BOLT CAPACITY	AIR PRESSURE	ANVIL LENGTH
2000	1.2	1600	1"	1.54	110	8"



A05E014
3/8" Impact Wrench (Twin Hammer)

- Adjustable forward / reverse regulator with 3 forward power settings and one full power setting in reverse.
- Design for automobile repair and maintenance.
- Free speed: 10000 RPM
- Bolt capacity: 13mm
- Max. torque: 450N.m (330ft.lb)
- Air pressure: 6-8 kg/cm2
- Air inlet: 1/4"NPT
- Net weight: 1.6KGS



A05E135
3/8" Twin Hammer Composite

- 3/8" Twin Hammer
- Free Speed: 9800RPM
- Max Torque: 600N.M
- Air Pressure: 6-8kg/cm2
- Bolt Capacity: 13mm
- Air Inlet:1/4"
- Momet Bound: 200-500nm
- Shell Material: Composites



A05X009
1" Drive Long Shank Impact Wrench

- 1" Drive long shank impact wrench, come with large size sockets: 38mm and 41mm
- Convenient reverse valve for easy direction changes
- Side handle, light weight, durable cast aluminum housing
- Air Inlet: 1/2" NPT
- Pinless hammer
- 3100N/M (2300FT/LB)
- Pack in blow mold case



A05E017
3/8" Butter y Air Impact Wrench (Rocking Dog Clutch)

- 3/8 " IMPACT WRENCH
- Free Speed:10000RPM
- Average air consumption:3cfm
- Max torque: 102N-M,75FT-LB
- Bolt capacity:12.7mm
- Exhaust:Front
- Air pressure:90PSI ,6.3kg/cm2



A05E213
3/8"Min Air Impact Wrench

- The material: Aluminum alloy
- Air inlet:1/4"
- Free speed :8000RPM
- Max Torque:380ft/lb
- Work torque:300-360ft/lb
- Working pressure:90psi 6.3kg/cm2
- Net weight:1.6kg



A05X013
1" Drive Long Shank Impact Wrench

- 1" Drive long shank impact wrench, come with two large size sockets: 1-1/2" & 1-5/8"
- Convenient reverse valve for easy direction changes
- Side handle, light weight, durable cast aluminum housing
- Air Inlet: 1/2" NPT
- Pack in blow mold case



A05E105
3/8 " Mini Impact Wrench (Twin Hammer)

- Free Speed:10000RPM
- Average air consumption:7cfm
- Max torque: 310N-M,228FT-LB
- Bolt capacity:14mm 9/16"
- Air pressure:90PSI ,6.3kg/cm2



A05E215
3/8" Mini Air Impact Wrench (Twin Hammer)

- The material: Aluminum alloy
 - Air inlet:1/4"
 - Free speed :7500RPM
 - Max Torque:520N.M
 - Working pressure:90psi 6.3kg/cm2
 - Capacity bolt dia:16mm
 - Net weight:1.75kg
 - Features:
- Under the exhaust silencer, can reduce the noise in the use of the machine.
 - Adjustable intake air can be adjusted at any time intake size
 - Rocker switch can be one-handed conversion of positive and negative switch, the use of more simple.



A05X017
1" Drive Long Shank Impact Wrench

- 1" Drive long shank impact wrench, come with two large sockets: 1-1/2" & 1-5/8"
- Convenient reverse valve for easy direction changes
- Side handle, light weight, durable cast aluminum housing
- Air Inlet: 1/2" NPT
- Pack in blow mold case



A05X101
17pcs Air Tool Kit

- 1pc- 1/2 " impact wrench(twin hammer)
- 1pc-1/2 " dr,125mm extension bar
- 10pcs-1/2 " dr sockets:9,10,11,13,14,17,19,22,24,27mm
- 1pc-mini oiler (or univ.joint)
- 1pc-5mm hex key wrench
- 1pc-oil pot
- 1pc-nippler
- 1pc-blow mold case
- CE,GS Certification



A05X205
1/2" Composite Air Impact Wrench Kit(Twin Hammer)

- Max Torque: 885 ft/lb (1200n.m)
- Working Torque: 450 ft-lbs (610 N-m)
- Free speed: 7500RPM
- Air pressure: 90psi 6.3kg/cm2
- Average air consumption: 6.5 scfm
- Bolt Capacity: 5/8"(16mm)
- Air inlet: 1/4"
- Clutch type: twin hammer
- Housing material: composite plastic
- 10pcs 1/2" drive CR-V sockets: 9,10,11,13,14,17,19,22,24,27mm, each 1pc with black oxide nish
- 1pc-1/2"drive 125mm(5")extension bar with black oxide nish
- 1pc- key wrench
- 1pc-Mini Oiler
- 1pc-coupler



A05X213
17pc 1/2"air Impact Wrench Kit

- 1/2 Inch Drive Air Impact Wrench
- Built-in Regulator To Match Speed And Power To Each Job
- Rocking Dog Clutch Mechanism
- Convenient Forward/Reverse Switch Allows Quick Direction Changes
- Trigger Throttle For Precise Power Control
- 10 Sockets: 9, 10, 11, 12, 14, 17, 19, 22, 24, 27mm
- Pistol Grip For Extra Comfort And Easy Manoeuvring
- Hex Key Wrench
- Oil Pot , Nipple, Mini Oiler, Extension Bar, Moulded Carry Case
- Air Consumption: 5CFM
- Ultimate Torque: 230ft/lb
- Clutch Type: Rocking Dog
- Free Speed: 7000 rpm
- Max. Working Pressure: 90 PSI
- 1/4" BSP Air Inlet



A05X151
13pcs 3/4 " Impact Wrench Kit

- 1pc-3/4 "impact wrench(rocking dog clutch)
- 8pcs-sockets(26,27,28,30,32,35,36,38mm)
- 1pc-oil pot
- 2pcs-hex key (4mm and 5mm)
- 1pc-nipple
- 1pc-blow mold case
- ce,gs certification



A05X207
17pcs 1/2 " Air Impact Wrench Kit

- 1pc-1/2" air impact wrench 1pc-4mm hex key wrench
- 1pc-1/2 " dr 125mm extension bar
- 1pc-oil pot
- 10pcs-1/2 " dr
- Sockets:9,10,11,13,14,17,19,22,24,27mm
- 1pc-nipple
- 1pc-mini oiler(or univ.joint)
- 1pc-blow mold case



A05X211
1/2" Impact Wrench (Twin Hammer)

- 1pc 1/2" Air Impact Wrench
- 1pc Extend Pole
- 1pc Nipple
- 6pcs 1/2" Drive Sockets: 13, 14,15,16, 17, 19mm
- 6pcs 3/8" Drive Sockets: 13, 14,15,16, 17, 19mm
- Free speed: 9000 RPM
- Bolt capacity: 13mm
- Max. torquo: 500N.m (370ft.lb)
- Air pressure: 6-8 kg/cm2
- Air inlet: 1/4"NPT
- Net weight: 1.6KGS



A05X411
3/8" Impact Wrench (Twin Hammer)

- 1pc 1/2" Air Impact Wrench
- 1pc Extend Pole
- 1pc Nipple
- 6pcs 1/2" Drive Sockets: 13, 14,15,16, 17, 19mm
- 6pcs 3/8" Drive Sockets: 13, 14,15,16, 17, 19mm
- Free speed: 9000 RPM
- olt capacity: 13mm
- Max. torquo: 500N.m (370ft.lb)
- ir pressure: 6-8 kg/cm2
- ir inlet: 1/4"NPT
- et weight: 1.6KGS



A07A005
1/4" Stubby Air Ratchet Wrench

- Easy reversible action with paddle style trigger
- Lightweight, just 1-1/8 lbs. for less fatigue
- 15 ft. lbs. maximum torque
- Ball and needle bearing construction for long life
- Rear exhaust



A07A014
3/8" Mini Air Ratchet Wrench

- (Single Ratchet Paw)
- Rear 360 degree exhaust.
- Adjustable inlet design, convenient operation.
- Exclusive composite body design show much stronger.
- Durable and comfortable feeling of texture deal for small engine repair, headlight and bench job.



A07A035
3/8"Stubby Air Ratchet Wrench

- Aluminum:body
- Air inlet:1/4"
- Free speed :240RPM
- Max Torque:27N.M
- Length:185mm
- Working pressure:90psi 6.3kg/cm2
- Average Air consumption: 4cfm
- Capacity:6mm or 8mm
- Net weight:0.52kg



A07B017
1/4" Air Ratchet Wrench

- Aluminium body (Polished)
- Working pressure: 90 psi
- Air consumption: 4CFM
- Air inlet: 1/4"
- Max Speed: 150rpm
- Max torque: 45 ft/lb
- Front exhaust
- Built-in air regulator
- Paddle speed control



A07A009
1/4" Stubby Air Ratchet Wrench

- Aluminium body (Soft-touch coating)



A07A019
Mini 3/8" Dr. Air Ratchet Wrench

- Mini length, Light weight ,Both function for di erent use.
- Ratchet square : 3/8 Dr. and screwdriver: 1/4 Dr.
- Working torque: 10~20 ft-lbs
- Max. Torque: 25 ft-lbs (34Nm)
- Feed speed: 160 RPM
- Air consumption: 4 CFM
- Air inlet: 1/4
- Air pressure: 90 PSI



A07A053
1/4"Mini Air Ratchet Wrench

- The material: Aluminum alloy
- Air inlet:1/4"
- Free speed :300RPM
- Max Torque:30N.M
- Length:127mm
- Working pressure:90psi 6.3kg/cm2
- Average Air consumption: 4cfm
- Capacity:6mm
- Net weight:0.4kg
- Features:
 - 1 The shortest pneumatic ratchet wrench.
 - 2 Spine pro le from the chromium molybdenum alloy steel precision forging, after processing and special heat treatment, size precision, extended life.
 - 3 The planetary pinion is precisely operated in the inner ring tooth tube, the power is smooth and lasting.



A07B018
1/4" Air Ratchet Wrench

- Aluminium body(Power coating)
- Working pressure: 90 ps
- Air consumption: 4CFM
- Air inlet: 1/4"
- Max Speed: 150rpm
- Max torque: 45 ft/lb
- Front exhaust
- Built-in air regulator
- Paddle speed control



A07A013
1/4" Mini Air Ratchet Wrench

- (Single Ratchet Paw)
- Rear 360 degree exhaust
- Adjustable inlet design, convenient operation
- Exclusive composite body design show much stronger
- Durable and comfortable feeling of texture deal for small engine repair, headlight and bench job2



A07A033
1/4"Stubby Air Ratchet Wrench

- Aluminum:body
- Air inlet:1/4"
- Free speed :240RPM
- Max Torque:27N.M
- Length:185mm
- Working pressure:90psi 6.3kg/cm2
- Average Air consumption: 4cfm
- Capacity:6mm or 8mm
- Net weight:0.52kg



A07A055
3/8"Stubby Air Ratchet Wrench

- Aluminum:body
- Air inlet:1/4"
- Free speed :240RPM
- Max Torque:27N.M
- Length:185mm
- Working pressure:90psi 6.3kg/cm2
- Average Air consumption: 4cfm
- Capacity:6mm or 8mm
- Net weight:0.52kg



A07B019
1/4"air Ratchet Wrench

- Aluminium body(soft-touch coating)
- Working pressure: 90 psi
- Air consumption: 4CFM
- Air inlet: 1/4"
- Max Speed: 150rpm
- Max torque: 45 ft/lb
- Front exhaust
- Built-in air regulator
- Paddle speed control



A07C017
3/8"Air Ratchet Wrench

- The material: Aluminum alloy
- Air inlet:1/4"
- Free speed :160RPM
- Max Torque:65ft/lb
- Length:265mm
- Working pressure:90psi 6.3kg/cm2
- Average Air consumption: 4cfm
- Capacity:13mm
- Net weight:1.17kg



A07C029
3/8"dr.air Ratchet Wrench (Twin Ratchet Paws)

- Middle 360degree exhaust
- Durable and lightweight die cast aluminium body with soft handle trip
- Most popular ratchet in the automotive industry like body shop , replacking or removing radiators.
- Air conditioning and water pumps.
- Ideal for assembling and running small bolts in tight places.



A07D018
1/2"Air Ratchet Wrench

- Aluminium body(Power coating)
- Working pressure: 90 psi
- Air consumption: 4CFM
- Air inlet: 1/2"
- Max Speed: 150rpm
- Max torque: 45 ft/lb
- Front exhaust
- Built-in air regulator
- Paddle speed control



A07D031
1/2" Air Ratchet Wrench (Composite Body)

- Free speed RPM:170
- Average air consumption cfm:5
- Max torque:90N-M, 66FT-LB
- Clutch type : 3gear, planetary
- length mm: 285 in.:11.2
- Weight Kg: 1.35 Lbs: 2.97
- Air pressure psi : 90 kg/cm:6.3
- Body treatment: COMPOSITE (NYLON + Rubber).



A07C018
3/8"Air Ratchet Wrench

- Aluminium body(Power coating)
- Working pressure: 90 psi
- Air consumption: 4CFM
- Air inlet: 3/8"
- Max Speed: 150rpm
- Max torque: 45 ft/lb
- Front exhaust
- Built-in air regulator
- Paddle speed control



A07C031
3/8" Air Ratchet Wrench (Composite Body)

- Free speed RPM:170
- Average air consumption cfm:5
- Max torque:90N-M, 66FT-LB
- Clutch type : 3gear, planetary
- Length mm: 285 in.:11.2
- Weight Kg: 1.35 Lbs: 2.97
- Air pressure psi : 90 kg/cm:6.3
- Body treatment: COMPOSITE (NYLON + Rubber).



A07D019
1/2" Air Ratchet Wrench

- Aluminium body(soft-touch coating)
- Working pressure: 90 psi
- Air consumption: 4CFM
- Air inlet: 1/4"
- Max Speed: 150rpm
- Max torque: 45 ft/lb
- Front exhaust
- Built-in air regulator
- Paddle speed control



A07D053
1/2"Air Ratchet Wrench

- The material: Aluminum alloy
- Handle sets of rubber holster
- Air inlet:1/4"
- Free speed :160RPM
- Max Torque:65ft/lb
- Length:265mm
- Working pressure:90psi 6.3kg/cm2
- Average Air consumption: 4cfm
- Capacity:13mm
- Net weight:1.17kg



A07C019
3/8"Air Ratchet Wrench

- Aluminium body(soft-touch coating)
- Working pressure: 90 psi
- Air consumption: 4CFM
- Air inlet: 1/4"
- Max Speed: 150rpm
- Max torque: 45 ft/lb
- Front exhaust
- Built-in air regulator
- Paddle speed control



A07D017
1/2" Air Ratchet Wrench

- Aluminium body (Polished)
- Working pressure: 90 psi
- Air consumption: 4CFM
- Air inlet: 1/2"
- Max Speed: 150rpm
- Max torque: 45 ft/lb
- Front exhaust
- Built-in air regulator
- Paddle speed control



A07D029
1/2" Dr.air Ratchet Wrench (Twin Ratchet Paws)

- Middle 360degree exhaust
- Durable and lightweight die cast aluminium body with soft handle trip
- Most popular ratchet in the automotive industry like body shop , replacking or removing radiators.
- Air conditioning and water pumps.
- Ideal for assembling and running small bolts in tight places.



A07D085
1/2"Large Torque Air Ratchet Wernch

- Aluminum:body
- Air inlet:1/4"
- Free speed :150RPM
- Max Torque:122N.M
- Length:365mm
- Working pressure:90psi 6.3kg/cm2
- Average Air consumption: 5cfm
- Capacity:14mm
- Net w



A07D155
1/2" Air No Recoil Ratchet Wrench

- The material : Aluminum alloy
- Air inlet:1/4"
- Free speed :450RPM
- Max Torque:80N.M
- Length:265mm
- Working pressure:90psi 6.3kg/cm²
- Average Air consumption: 4cfm
- Capacity:10mm
- Net weight:1.3kg



A07X005
17pc. Air Ratchet Wrench Kit

- 1pc 1/2" ratchet wrench
- 7pc air sockets:9,10,11,13,14,17,19mm
- 1pc 1/2" x3" extension bar
- 1pc 1/2" U-joint 3pc bits
- 1pc bits holder 1pc nipple
- 1pc oil pot 1pc blow mold case



A07X105
17pcs Air Ratchet Wrench Kit

- 1PC-air ratchet wrench
- 7pcs-sockets: 9,10,11,13,14,17,19mm
- 1pc-1/2" 3" extension bar
- 1pc-1/2" dr univ joint
- 2pcs-phillips bits 30mm:#2,#3
- 1pc-slotted bit 30mm:5.5mm
- 1pc-bit holder
- 1pc-oil pot
- 1pc nipple
- 1pc-blow mold case



A09A005
3/8" Air Non-reversible Drill

- Handle Exhaust
- Die cast aluminium body,one more choice;
- Ergonomic choice for drilling,honing and hole sawing
- 3-jaw keyed chuck with key
- One more choice keyless chuck
- Maximum speed (rpm)1800
- Chuck size : 3/64 in. - 3/8 in.
- Working pressure: 90 PSI
- Air inlet size: 1/4NPT-18



A09A006
3/8" Air Non-reversible Drill

- Handle Exhaust
- Die cast aluminium body,one more choice;
- Ergonomic choice for drilling,honing and hole sawing
- 3-jaw keyed chuck with key
- One more choice keyless chuck
- Maximum speed (rpm)1800
- Chuck size: 3/64 in. - 3/8 in.
- Working pressure: 90 PSI
- Air inlet size: 1/4NPT-18



A09A009
3/8" Air Reversible Drill

- Reversible
- Convenient ngertip reverse
- 3-jaw keyed chuck with key
- Maximum speed (rpm)1700
- Chuck size : 3/64 in. - 3/8 in.
- Working pressure : 0-90 PSI
- Air inlet size: 1/4 in. -18 NPT



A09A041
3/8" Non Reversible Air Drill

- Rear Exhaust
- Durable and lightweight die cast aluminium body
- Convenient one hand operation with safety trigger for easy start
- Good choice for drilling, honing and hole sawing
- One more choice:keyless chuck for fast and easy bit changes
- Maximum speed (rpm)15000
- Chuck size : 3/64 in. - 3/8 in.
- Working pressure : 90 PSI
- Air inlet size: 1/4NPT-18



A09A043
3/8" Angle Drill

- Lightweight aluminum alloy housing with compact design.
- Balanced for pinpoint accuracy.
- Easier to use, less fatiguing than an in-line grinder on vertical surfaces.
- Speed:1800rpm.
- Spindle Thread:3/8"-24T.
- Air Consumption:4.0cfm.
- Weight:2.42lbs/1.11kg.
- Length:7.48"/190mm.
- Air Inlet:1/4"
- Pressure:90psi.



A09B013
1/2" Air Reversible Drill

- Lightweight aluminum alloy housing
- Multi-position auxiliary grip
- Precision-ground 1/2 in. keyed chuck
- Planetary gear drive
- Maximum speed: 7000 RPM
- Working pressure: 90 PSI
- Chuck size:1/2 in.
- Air inlet size: 1/4 in. -18 NPT



A09C005
1/4"air Screw Driver (Double Hammer)

- Side Exhaust
- Durable die cast aluminium body
- Easy adjustable light&left switch.

FREE SPEED	AVERAGE AIR CONSUMPTION	MAX TORQUE	BUILT CAPACITY	LENGTH	WEIGHT	WORKING PRESSURE
127	4.3	60	44	6	14	100
10000	127	4.3	60	44	6	14



A09C009
1/4"air Screw Driver (Double Hammer)

- Side Exhaust
- Durable die cast aluminium body
- Easy adjustable light&left switch.

FREE SPEED	AVERAGE AIR CONSUMPTION	MAX TORQUE	BUILT CAPACITY	LENGTH	WEIGHT	WORKING PRESSURE
84	3	21	15.3	5	10	100
8000	84	3	21	15.3	5	10



A09C013
1/4"Air Screw Driver (Double Hammer)

- Side Exhaust
- Durable die cast aluminium body
- Easy adjustable light&left switch.



A09C017
1/4"Air Screw Driver (Double Hammer)

- Side Exhaust
- Durable die cast aluminium body
- Easy adjustable light&left switch.



A09C021
1/4" AIR SCREW DRIVER (Lever-operated and Button-reverse Type)

- Torque-external-adjustable
- Push-to-start
- Button-reverse



A09C025
1/4" Air Screw Driver (Piston Type)

- Handle Exhaust
- Durable and lightweight die cast aluminium body
- Variable speed throttle for easy start
- Convenient one hand operation with side mounted F/R lever



A09A010
3/8" Air Reversible Drill

- Reversible
- Convenient ngertip reverse
- 3-jaw keyed chuck with key
- Maximum speed (rpm)1700
- Chuck size : 3/64 in. - 3/8 in.
- Working pressure : 0-90 PSI
- Air inlet size: 1/4 in. -18 NPT



A09A019
3/8" REVERSIBLE AIR DRILL (Composite Body)

- Free speed RPM:1800
- Average air consumption cfm:4
- CHUCK:3/8"
- ANGLE:90°
- length mm:198 in.: 7.79
- Weight Kg :0.92 Lbs: 2.02
- Air pressure psi : 90 kg/cm: 6.3
- Body treatment: COMPOSITE (NYLON + Rubber).



A09A031
3/8" In Line Non-reversible Air Drill

- Rear Exhaust
- Durable and lightweight die cast aluminium body
- Convenient one hand operation with safety trigger for easy start
- One more choice:keyless chuck for fast and easy bit changes
- Maximum speed (rpm)20000
- Chuck size: 3/64 in. - 3/8 in.
- Working pressure: 0-90 PSI
- Air inlet size: 1/4NPT-18



A09X005
16pcs 3/8" Air Drill Kit

- 1pc-3/8 " air drill
- 10pcs-h.s.twist drill bits:1.5,2.5,3.5,4,4.5, 5,5.5,6mm
- 1pc-oil pot
- 1pc-drill chuck key
- 1pc-nipple
- 1pc-mini oiler
- 1pc-blow mold case
- CE,GS Certi cation



A11A007
150mm Air Hammer

- Free speed BPM:4500.
- Average air consumption cfm:4.
- Chisel Shank:0.401in 10.2mm type:Round.
- Barrel Stroke in mm: 1.69 43.0.
- Exhaust: Front.
- Length mm in:151 5.90.
- Weight Kg Lb:1.06 2.33.
- Air pressure psi kg/cm: 90 6.3.
- Body treatment: COMPOSITE.



A11A015
190mm Air Hammer

- 190MM AIR HAMMER
- Free speed BPM:3400
- Average air consumption cfm:3
- Chisel Shank:0.401in 10.2mm type:Round
- Varrel Stroke in mm: 2.76 70
- Exhaust: Front
- length mm in:189 7.44
- Weight Kg Lb:2.05 4.51
- Air pressure psi kg/cm: 90 6.3
- Material: ALUMINUM
- Body treatment : POLISHING
- Certi cate : CE,GS



A11A005
150mm AIR HAMMER KIT

- Chisel Shank Size:3/8"
- Free Speed:3000RPM
- Air Consumption:4CFM
- Operating Pressure:90PSI
- Air Inlet:1/4"BSP
- With 4 PCS 150MM Chisels



A11A009
Air Hammer W/ Quick Release Chisel Holder



A11A017
210mm AIR HAMMER KIT



A11A006
150mm Air Hammer Kit

- Soft-touch coating



A11A013
190mm Air Hammer Kit



A11A911
51 In. Long Reach Air Scraper

- 4 in. wide blade
- Paddle trigger
- Cushion grip
- 2100 BPM (blows per minute)
- Air consumption: 10 CFM @ 90 PSI
- Working pressure: 90 PSI
- Locking collar bit retention
- Air inlet size:1/4 in.



A11B005
Air Nibbler

- Precise, distortion free cuts in 16 gauge steel/14 gauge aluminum
- Paddle throttle lever for precise control
- Working pressure (psi)90 PSI
- INLINE AIR



A11D005
Pistol Grip Air Shear

- Cuts with minimal edge distortion
- Replaceable cutter head swivels 360 degrees
- Cutting capacity18 gauge
- Housing material:
- Die Cast Aluminum Housing,
- Steel blade, black oxide Steel hardware
- Strokes per minute (SPM)1800
- Working pressure (psi)90 PSI
- Air inlet size1/4 in.



A11E005
3"Air Cut-o Tool

- Variable speed
- Safety trigger prevents accidental startup
- Rear exhaust
- Uses standard 3 in. cutting disc
- Average air consumption:
- 5 CFM @ 90 PSI



A11E015
3"Air Cut O Tool

- Composite housing with most ergonomic design.
- Safety lever trigger prevents accidental starts.
- Swivel metal guard prevents you from sparks at operation.
- Adjustable rear speed regulator in 4 positions
- 360 degree adjustable exhaust de flector.
- Ideal for cutting sheet metal, tail pipes, bolts and nuts.
- Rear Exhaust.
- Free Speed: 20000 RPM.
- Capacity: 3".
- Air Inlet: 1/4" NPT.
- AVG.air consumption: 5SCFM.
- Working Pressure: 90PSI.



A11C005
High Speed Metal Saw

- Rugged die cast aluminum body
- Cuts rods, pipes and bars with speed and e ciency
- Average air consumption4 CFM @ 90 PSI
- Cutting capacity16 gauge
- Strokes per minute (SPM)9000
- Working pressure (psi)90 PSI
- Air inlet size1/4 in.



A11D011
Inline Air Shear

- Paddle throttle lever for precise control
- Cutter head swivels a full 360 degrees
- Cutting capacity:18 gauge
- Housing material:Die Cast Aluminum Housing,
- Steel Blade, Black Oxide Steel Hardware
- Strokes per minute (SPM)2700
- Working pressure (psi)90 PSI
- Air inlet size1/4 in.



A11E006
3"Air Cut-o Tool

- Rear 360 degree Exhaust
- Die cast aluminium body
- TPE soft handle grip
- Diameter:3 in.
- Maximum speed (rpm):18000
- Air inlet size: 1/4 in. -18 NPT



A11E017
3" Air Cut O Tool (With Swivel Metal Guard)

- Lightweight aluminum housing with bicolor soft grip.
- Lever block trigger for safety.
- Chrome-plated swivel steel guard protects you from sparks at operation.
- To cut o mu ers, tail pipes and bolts quickly and e ciently.
- Rear exhaust.
- Free speed: 20000rpm.
- Capacity: 3".
- Air Inlet: 1/4"NPT.
- AVG. Air Consumption: 4.5SCFM.
- Working Pressure: 90Psi.



A11C006
High Speed Metal Saw

- Cuts rods, pipes and bars with speed and e ciency
- Average air consumption4 CFM @ 90 PSI
- Cutting capacity16 gauge
- Strokes per minute (SPM)9000
- Working pressure (psi)90 PSI
- Air inlet size1/4 in.



A11D021
AIR GARDEN SHEAR

- Die cast aluminium body in ergonomic design for convenient operation
- Lever block trigger for safety
- Hardened steel blades allow you to make high performance and clean cuts for various tree, ower branches
- Working pressure (psi)90 PSI



A11E013
3"Air Cut-o Tool W/ Plastic Handle

- Rear360 degree Exhaust
- Die cast aluminium body
- TPE soft handle grip
- Diameter:3 in.
- Maximum speed (rpm):18000
- Air inlet size: 1/4 in. -18 NPT



A11E021
3" Extended Reach Air Cut-o Tool

- Uses standard 3" cutting wheels with 3/8" arbor
- Rugged cast aluminum alloy motor housing, steel wheel guard
- Rear exhaust
- Oil-resistant TPR comfort grip
- Maximum speed (rpm)18000
- Air inlet size1/4 in. -18 NPT (F)



A11F005
Variable Speed Multifunction Air Tool

- Die cast aluminum housing
- Paddle switch for variable speed control
- Includes 3" triangular sanding pad plus sandpaper for metal and wood
- Spindle and blade arbor design positively locks the blade in 7 forward positions for added versatility
- Cuts into wood 3/8" deep
- Oscillations per minute (OPM)17000



A11H011
9" Air Caulking Gun

- Operate for silicones, putty, glue
- Aluminum tube, Nylon handle
- Built-in air regulator
- 9 inches for 310ml plastic pipe
- Working pressure: 0 to 120psi
- 1/4" Female air inlet or 1/4" (8mm) hose coupler



A11I003
Air Punch/Flange Tool

- Heavy duty head rotates 360° to easily crimp angles or lap joint sheets and pipes.
- Punches accurate 3/16" holes for fasteners or welding.
- Capacity: 18 Gauge/1.2mm.
- Air Consumption: 4.0cfm.
- Weight: 3.0lbs/1.36kg.
- Length: 9.75"/248mm.
- Air Inlet: 1/4".
- Pressure: 90psi.



A11G101
Mini pneumatic needle scaler

- Possible to convert into 19x3/8"
- Free speed: 4000 SPM
- Working pressure: 90psi
- Shank size: 12.7mm
- Avg. air consumption: 3.5 cfm
- Air inlet: 1/4" PT
- Length: 18 in / 457 mm
- Weight: 2.85kgs / 6.27 LBS



A11H013
15" Air Caulking Gun

- Operate for silicones, putty, glue
- Aluminum tube, Nylon handle
- Built-in air regulator
- 15 inches for 600ml sausage
- Working pressure: 0 to 120psi
- 1/4" Female air inlet or 1/4" (8mm) hose coupler



A11X005
9pcs 150mm Air Hammer Kit

- 1pc-150mm air hammer
- 1pc-spring retainer
- 1pc-oil bottle
- 4pcs-120mm chisel
- 1pc-nipple
- 1pc-blow case
- CE,GS Certification



A11G111
Air Needle Scaler

- Air needle scaler
- Free speed BPM: 4500
- Average air consumption cfm: 4
- Barrel stroke: 1.69in 43mm
- Length: 351mm 13.71in
- Weight Kg Lb: 2.37 5.21
- Air pressure psi kg/cm: 90 6.3
- Material: aluminum
- Body treatment: polishing



A11H015
18" Air Caulking Gun

- Operate for silicones, putty, glue
- Aluminum tube, Nylon handle
- Built-in air regulator
- 15 inches for 650ml sausage
- Working pressure: 0 to 120psi
- 1/4" Female air inlet or 1/4" (8mm) hose coupler



A11X009
9pc. 190mm Air Hammer Kit

- Free speed: 3500RPM
- Working air pressure: 90PSI
- Air consumption: 5CFM
- Air inlet size: 1/4"NPT
- Aluminum alloy air hammer with pistol grip handle
- Includes 5 pc 3/8" shank heat treated
- CR-MO steel chisels
- Ideal for cutting, shearing & punching
- Durable blow molded case for easy storage



A11Y005
Air Hammer Quick Release Chisel Holder

- Holds 0.401 Parker type taper shaft chisels
- Fits onto 1-3/16"-8 TPI threads and locks with three set screws
- Forged and precision machined
- Carbon steel body



A11Y111
Trangular Eva Sanding Pad

- 80x10mm



A11Y119
Stainless Steel Segment Blade

- 52x0.8mm



A11Y125
Hcs Saw Blade

- 31x0.8mm



A11Y009
Air Hammer Replacement Chisel Spring

- Secures chisel during operation of tool
- For use with almost all types of air hammers
- Easy to install



A11Y115
Triangle Rasp

- 80x5mm




A11Y121
Hcs Saw Blade

- 65x0.8mm



A11Y129
Bi-metal Saw Blade

- 31x0.8mm



A11Y007
Safety Retainer Nut & Spring

- 2 piece safety retainer for air hammers
- Collar, fits against stop on chisel shank for 100% contact



A11Y023
9 Pc. Air Chisel Set

- Made from the best shock-resisting alloy steel available.
- Designed to fit all popular air hammers with a standard .401 shank.
- Contains one each:
- Double Blade Panel Cutter,
- Sheet Metal Trimmer,
- Spot Weld Breaker,
- Straight Panel Cutter,
- 3/4" Cold Chisel,
- Scraper,
- Tapered Punch,
- 7" Chisel Blank,
- 1-1/4" Smoothing Hammer in tray.



A11Y131
Hcs Saw Blade (31x0.8mm)

- 31x0.8mm



A11Y135
Hcs Saw Blade(20x0.8mm)

- 20x0.8mm



A11Y161
3PC. Blade Set

- Item No.: A11Y161



A11Z035
Air File

- The material: Iron
- Impact frequency: 3700BMP
- Length:175cm
- Air Inlet:1/4"
- Working pressure:90psi 6.3kg/cm2
- Avg air consumption:16cfm
- Net weight:1.0kg



A13A005
Fine Crown Stapler (22 Gauge)

- Specifications
- Capacity.....150 nails
- Nail size.....22 gauge (0.75 mm)
- Nail lengths.....1/4"to 5/8"(6 to 16 mm)
- Operating pressure..... 50-90 PSI (3.5-5 BAR)
- Max. pressure.....120 PSI (8.3 BAR)
- Air consumption..... 3.5 SCFM @ 90 PSI
- Air inlet..... 1/4"NPT or BSP
- Weight.....2.00 lbs. (0.90 kgs)
- Features & Functions
- Hammer nails into wood just using body cap hardened.
- Easy open latch for more comfortable loading
- Body hindside exhaust.
- Economical air consumption and low noise.
- Hardened alloy steel driver for long-life.
- Used for Upholstery
- Wooden Casde
- Paper Board
- Toys *Window Shade* Cabinet Backs*Furniture Backs



A13B005
2-in-1 Comb. Nailer/ Stapler (18 Gauge)

- Specifications
- Capacity..... 100 nails
- Nail size.....18 gauge (1.25x1.250 mm)
- Nail lengths.....3/8"to 2 "(10 to 50 mm)
- Staple size.....18 gauge (1.25x1.0 mm)
- Staple crown size.....0.22" (5.7mm)
- Staple lengths.....5/8"to 1-5/8" (16 to 40 mm)
- Operating pressure..... 60-110 PSI (4-7.5 BAR)
- Max. pressure.....120 PSI (8.3 BAR)
- Air consumption..... 1.4 SCFM @ 90 PSI
- Air inlet..... 1/4"NPT or BSP
- FEATURES & FUNCTIONS
- 2-in-1 magazine applicabel for both brads and nails
- Feature touch-strike safety system
- One-piece hardened alloy steel driver for longer tool life
- Qucik release latch for fast loading
- Side view window for quick fastener review
- Combination trigger with lock
- Good applications for wooden box manufacturing, cabinet work, plywood assembly, wall paneling and drawer assembly



A13C005
Micro Pinner (24 Gauge)

- Specifications
- Capacity.....100 nails
- Nail size.....24 gauge (0.63 mm)
- Nail lengths..... 15/32"to 1-3/16" (12 to 30 mm)
- Operating pressure... 50-100 PSI (3.5-7 BAR)
- Max. Pressure..... 120 PSI (8.3 BAR)
- Air consumption..... 3.8 SCFM @ 90 PSI
- Air inlet..... 1/4"NPT or BSP
- Weight.....2.10 lbs. (0.95 kgs)
- Features & Functions
- Easy side loading magazine without and adjustment.
- Hardened stainless steel driver for long life.
- Strong and light weight die-casting body.
- Hardened stainless steel driver for long life.
- Used for Window and door trim
- Wooden toys
- Decorative work
- Flower boxex
- Collars of wood or plastic



A13C009
Air Brad Nailer (18 Gauge)

- Specifications
- Capacity..... 100 nails
- Nail size.....18 gauge (1.25x1.0 mm)
- Nail lengths.....3/8"to 1-2/4 "(10 to 32mm)
- Operating pressure..... 60-100 PSI (4-7 BAR)
- Max. Pressure.....120 PSI (8.3 BAR)
- Air consumption..... 0.8 SCFM @ 90 PSI
- Air inlet..... 1/4"NPT or BSP
- Features & Functions
- Safety feature disables tool unless contact trip is pressed against workpiece
- Air de ctor can be adjusted to any direction
- Quick release nose and no-mar tip (optional)
- Excellent for molding, furniture making, and picture framing



A13C031
34 Degree Clipped Head Framing Nailer (8-11 Gauge)

- Specifications
- Capacity..... 80 nails
- Nail size.....11 gauge--8 gauge (2.8 - 3.8 mm)
- Nail lengths.....2"to 3-1/2"(50 to 90 mm)
- Operating pressure..... 70-110 PSI (5-7.5 BAR)
- Max. pressure.....120 PSI (8.3 BAR)
- Air consumption..... 4.1 SCFM @ 90 PSI
- Air inlet..... 1/4"NPT or BSP
- Weight.....8.25 lbs. (3.75 kgs)
- Features & Functions
- Die-casting body, Light weight and powerful
- 360degree adjustable exhaust cover de ctor
- Safe for operators with touch-strike safety system
- Rubber comfort be gripped
- Used for Construction framing, Roof decks, Deck Construction.Pallet and crate assembly
- Sidewall sheathing. Fencing



A13C011
18 Ga Brad Nailer

- 18Ga.2" Brad Nailer.
- Dimensions:243x56x237mm (9.56"x2.2"x9.33")
- Weight:AI :1.35kg(2.97lbs).
- Magazine Capacity:100pcs.
- Operating Pressure:60-100psi(4-7bar).
- Fastener Length: 15-50mm(5/8"-2").
- Accessory:
- 1pc safety glasses.
- 1K 2" brad nails.
- 1pc 1/4" air tting.
- 1pc oil.



A13D005
Coil Nailer (12-13 Gauge)

- Specifications
- Capacity.....250-400 nails
- Nail size.....13 gauge--12 gauge (2.3 - 2.9 mm)
- Nail lengths.....1-1/4"to 2-1/2"(32 to 65 mm)
- Operating pressure..... 70-110 PSI (5-7.5 BAR)
- Max. Pressure.....120 PSI (8.3 BAR)
- Air consumption..... 4.8 SCFM @ 90 PSI
- Air inlet..... 1/4"NPT or BSP
- Weight.....5.78 lbs. (2.62 kgs)
- Features & Functions
- Dual action for this tool
- Drives both at wire welded and plastic sheet collated
- Nails without any adjustment
- Die-casting aluminum body for ultra-long lasting and durable
- Rubber wrapped handle more comfortable
- Used for Floor and wall framing
- Wood box assembly
- Fencing fastening lath wire on the plywood, roof and wall sheathing



A13C021
21degree Round Head Framing Nailer (8-11 Gauge)

- Specifications
- Capacity..... 50 nails
- Nail size.....11 gauge 8 gauge (2.8 - 3.8 mm)
- Nail lengths......2"to 3-1/2"(50 to 90 mm)
- Operating pressure..... 70-110 PSI (5-7.5 BAR)
- Max. Pressure..... 120 PSI (8.3 BAR)
- Air consumption..... 4.1 SCFM @ 90 PSI
- Air inlet..... 1/4"NPT or BSP
- Features & Functions
- Die casting aluminum housing for durability
- Feature touch-strike safety system
- Adjustable nail depth control
- One-piece hardened alloy steel driver for longer tool life
- No-mar tip protects work sureface
- Rubber grip reduces fatigue at operation
- Good application for construction framing, roo ng, pallet & crate assembly and fence building



A13D021
Coil Nailer (11-13 Gauge)

- Specifications
- Capacity.....250-400 nails
- Nail size.....13 gauge--11 gauge (2.4 - 2.9 mm)
- Nail lengths.....1-3/4"to 2-1/2"(45 to 65 mm)
- Operating pressure..... 70-110 PSI (5-7.5 BAR)
- Max. pressure..... 120 PSI (8.3 BAR)
- Air consumption..... 4.8 SCFM @ 90 PSI
- Air inlet..... 1/4"NPT or BSP
- Weight.....5.50 lbs. (2.50 kgs)
- Features & Functions
- Drives both at wire welded and plastic sheet collated nails without any adjustment;
- Anti-double re machanis;
- Comfortable rubber grip;
- Comes with plastic carrying case.
- Used for Making palletes, drums, export wooden box/Floor and Wall framing/Sub ooring/Roof and wall Sheathing/Fencing/ Heavy-duty packing crating/Roo ng



A15A005
3/16" Air Hydraulic Riveter

- Lightweight cast aluminum body
- Machined chrome plated steel nosepiece
- Air relief valve prevents overloading for long life
- Safety cap collects spent rivet pins
- Maximum pressure: 90PSI
- Air inlet size: 1/4 in. -18 NPT
- Nosepiece size (in.): 3/32 in., 1/8 in., 5/32 in., 3/16 in.



A15A021
1/4" Air Hydraulic Riveter

- Lightweight cast aluminum body
- Machined chrome plated steel nosepiece
- Air relief valve prevents overloading for long life
- Safety cap collects spent rivet pins
- Interchangeable nosepieces for rivets: 1/4 in, 3/16 in, 5/32 in, 1/8 in. (located in base)
- Working pressure: 90-120 PSI
- Air inlet size: 1/4 in-18 NPT



A15A053
5/32" Air Riveter

- 5/32" air Riveter
- Stainless: 3/32", 1/8", 5/32"
- Traction Power: 1300lbs
- Air Inlet: (PT): 1/4"
- Air Hose (ID): 3/8"
- Avg. Air Consumption: 0.3 cu. ft/stroke



A15A006
3/16" Air Hydraulic Riveter

- Lightweight cast aluminum body
- Machined chrome plated steel nosepiece
- Air relief valve prevents overloading for long life
- Safety cap collects spent rivet pins
- Maximum pressure: 90PSI
- Air inlet size: 1/4 in. -18 NPT
- Nosepiece size (in.): 3/32 in., 1/8 in., 5/32 in., 3/16 in.



A15A023
1/4" Air Hydraulic Riveter

- Lightweight cast aluminum body.
- Machined chrome plated steel nosepiece.
- Air relief valve prevents overloading for long life.
- Safety cap collects spent rivet pins.
- Interchangeable nosepieces for rivets: 1/4 in, 3/16 in, 5/32 in, 1/8 in. (located in base)
- Working pressure: 90-120 PSI.
- Air inlet size: 1/4 in-18 NPT.



A15B011
Gun Type Air Nut Riveter M3/M4

- Capacity: M3/M4 (4# 6# 8#)
- Idling speed: 3000RPM
- Weight: 1.15Kg
- Working pressure: 90-120 PSI
- Air inlet size: 1/4 in-18 NPT



A15A008
3/16" Air Hydraulic Riveter

- 3/16" AIR HYDRAULIC RIVETER
- Blind rivet setting capacity: 3/16", 5/32", 1/8", 3/32"
- Traction Power: 1.586lbs/720kgs
- Stroke Length: 9/16"/14mm
- Air Inlet: (PT): 1/4"
- Air Hose (ID): 3/8"
- Avg. Air Consumption: 0.03cfm/0.86l/min
- Sug. Air Comp: 0.5HP



A15A031
1/4" Air Hydraulic Riveter

- Stroke: 26mm
- Full force: 15.2KN
- Capacity: 4.0-6.4mm blind rivets, mono bolt
- Weight: 1.70Kg
- Working pressure: 90-120 PSI
- Air inlet size: 1/4 in-18 NPT



A15B021
Gun Type Air Nut Riveter M8/M10

- Capacity: M8/M10 (5/16" 3/8")
- Idling speed: 400RPM
- Weight: 1.1Kg
- Working pressure: 90-120 PSI
- Air inlet size: 1/4 in-18 NPT



A15B031
Air Hydraulic Nut Insert Tool

- Features:
- Ergonomics handle
- One-step trigger, reliable operation
- Spin on, pull up, spin off action
- Mandrel shall be changed without any auxiliary means
- Hydro-pneumatic operation
- Specifications & Placing capability:
- Riveting Capacity: M4-M12 (8#, 10#, 1/4", 5/16", 3/8", 1/2")
- Stroke: 7mm
- Optional Mandrel: 8-32UNF, 10-24UNC, 10-32UNF, 1/4-20UNC, 1/4-28UNF, 5/16-18UNC, 5/16-24UNF, 3/8-16UNC, 3/8-24UNF, 1/2-13UNC
- Accessories: 5pcs nose pieces (M4, M5, M6, M8 and M10) ;
- Two sets of each mandrel One bottle of lubricate oil
- One piece of syringe One regulator



A15B043
Air Hydraulic Nut Riveter

- Air Hydraulic Nut Riveter
- Capacity: M4, M5, M6, M8, M10 Steel
- Stroke: 2-10m/m
- Air consumption: 1.5 Liter/Stroke
- Operation Pressure: 6.0-7.0kg/cm



A15X013
3/16" Air Hydraulic Riveter Kit

- 3/16" AIR HYDRAULIC RIVETER KIT
- Kit including 3 sizes of rivets (3/16", 5/32", 1/8", 10pcs per package) and all necessary accessories for
- Replacement like nosepieces (3/16", 5/32", 1/8", 3/32")
- Nipple, oil pot, return springs, O-rings, wrenches,



A17A003
H.V.L.P Air Spray Gun (1-4cfm)

ITEM NO.	TYPE MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT			AIR PRESSURE	AIR INLET
				Standard	Range			kgs	lbs	psi		
			cfm	mm	mm	ml	ml/min			kg/cm ³		
A17A003	H-2000G1	H.V.L.P (Gravity feed)	1-4	0.8	0.8-1.0	100	70-110	0.29	0.64	30	2.1	1/4"
A17A004	H-2000G2	H.V.L.P (Gravity feed)	1-4	0.8	0.8-1.0	100	70-110	0.29	0.64	30	2.1	1/4"



A17A005
H.V.L.P Air Spray Gun (5-10 cfm)

ITEM NO.	TYPE MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT			AIR PRESSURE	AIR INLET
				Standard	Range			kgs	lbs	psi		
			cfm	mm	mm	ml	ml/min			kg/cm ²		
A17A005	970B	H.V.L.P (Gravity feed)	5-10	1.4	1.2-2.5	1000	180-240	0.74	1.62	43	3	1/4"
A17A006	970A	H.V.L.P (Gravity feed)	5-10	1.4	1.2-2.5	800	180-240	0.66	1.43	43	3	1/4"



A17A007
H.V.L.P Traditional Spray Gun
Aluminum Gun Body With
200cc Aluminum Cup

- Optimal working pressure: 25~50 psi
- Air consumption: 3~5 cfm
- Nozzle size: 0.8 or 1.0 or 1.2mm
- Air inlet: 1/4"NPT
- With 200cc aluminum cup
- Chrome plated aluminum body
- Regulator gauge can be choose
- Brush spanner



A17A008
H.V.L.P Traditional Spray Gun
Aluminum Gun (3~5 cfm)

- 1pc spray gun:
- Optimal working pressure:25~50 psi
- Air consumption:3~5 cfm
- Nozzle size:0.5 or 0.8 or 1.0 mm
- Air inlet:1/4"NPT
- 125cc plastic cup



A17A027
H.V.L.P Traditional Spray Gun
with 600cc Plastic Cup

- H.V.L.P Traditional Spray Gun
- Alu.Gun Body with 600cc Plastic Cup
- Optimal working pressure: 3.0-4.0Bar
- Air consumption: 6-11cfm
- Nozzle size(mm): 1.4-1.7-2.0-2.5
- Air inlet: 1/4(bsp/nps/npt)



A17A029
H.V.L.P Traditional Spray G
with 600cc Plastic Cup

- H.V.L.P Traditional Spray Gun
- Alu.Gun Body with 600cc Plastic Cup
- Optimal working pressure: 3.0-4.0Bar
- Air consumption: 6-11cfm
- Nozzle size(mm): 1.4-1.7-2.0-2.5
- Air inlet: 1/4(bsp/nps/npt)



A17A009
H.V.L.P Air Spray Gun (5-10cfm)

ITEM NO.	TYPE MODEL	DESCRIPTION	AIR CONSUMPTION		NOZZLE SIZE		CUP SIZE	FLUID		WEIGHT		AIR PRESSURE		AIR INLET
			cfm	mm	Standard	Range		(WATER) DELIVERY	ml	kgs	lbs	psi	kg/cm ³	
							ml/min							
A17A009	980B	H.V.L.P (Gravity feed)	5-10	1.4	1.2-2.5	1000	130-220	0.72	1.58	43	3	1/4"		
A17A010	980A	H.V.L.P (Gravity feed)	5-10	1.4	1.2-2.5	800	130-220	0.58	1.23	43	3	1/4"		



A17A017
H.V.L.P Air Spray Gun (6-10cfm)

ITEM NO.	TYPE MODEL	DESCRIPTION	AIR CONSUMPTION		NOZZLE SIZE		CUP SIZE	FLUID		WEIGHT		AIR PRESSURE		AIR INLET
			cfm	mm	Standard	Range		(WATER) DELIVERY	ml	kgs	lbs	psi	kg/cm ³	
							ml/min							
A17A017	827G	H.V.L.P (Gravity feed)	6-10	1.4	1.2-2.5	800	180-240	0.6	1.32	43	3	1/4"		



A17A021
H.V.L.P Air Spray Gun (5-10cfm)

ITEM NO.	TYPE MODEL	DESCRIPTION	AIR CONSUMPTION		NOZZLE SIZE		CUP SIZE	FLUID		WEIGHT		AIR PRESSURE		AIR INLET
			cfm	mm	Standard	Range		(WATER) DELIVERY	ml	kgs	lbs	psi	kg/cm ³	
							ml/min							
A17A021	W980	H.V.L.P (Gravity feed)	5-10	1.5	1.4-2.5	800	180-240	0.58	1.28	43	3	1/4"		



A17A025
H.V.L.P Air Spray Gun (5-10cfm)

ITEM NO.	TYPE MODEL	DESCRIPTION	AIR CONSUMPTION		NOZZLE SIZE		CUP SIZE	FLUID		WEIGHT		AIR PRESSURE		AIR INLET
			cfm	mm	Standard	Range		(WATER) DELIVERY	ml	kgs	lbs	psi	kg/cm ³	
							ml/min							
A17A025	828G	H.V.L.P (Gravity feed)	5-10	1.4	1.2-2.5	800	100-220	0.58	1.28	43	3	1/4"		



A17A033
H.V.L.P Air Spray Gun (6-10cfm)

ITEM NO.	TYPE MODEL	DESCRIPTION	AIR CONSUMPTION		NOZZLE SIZE		CUP SIZE	FLUID		WEIGHT		AIR PRESSURE		AIR INLET
			cfm	mm	Standard	Range		(WATER) DELIVERY	ml	kgs	lbs	psi	kg/cm ³	
							ml/min							
A17A033	827S	H.V.L.P (Suction feed)	6-10	1.4	1.2-2.5	1000	130-210	0.91	2.0	43	3	1/4"		



A17A035
H.V.L.P Spray Gun Aluminum
Gun Body With 1000cc
Aluminum Cup

- Optimal working pressure: 50~70 psi
- Air consumption: 8.5~12 cfm
- Nozzle size: 1.8 or 2.0 mm
- Air inlet: 1/4" NPT
- Cup:aluminum 1000cc
- Aluminum gun body with spray plastic



A17A043
H.V.L.P Spray Gun W/Gauge
1.3mm,1.5mm,1.7mm nozzle
(4-10cfm)

- One-piece all steel gun body
- Rust-resistant stainless steel nozzle and solid brass cap for durability and longevity
- Gravity feed fluid delivery design works together with three adjustable valve knobs for precise paint application
- Operation pressure: 40 PSI
- Working pressure: 10 PSI
- Average air consumption: 4.5 CFM
- Color coded 1.3mm OR 1.5mm OR 1.7mm nozzle size is perfect for metallic basecoat
- Primer and a variety of automotive and household painting projects
- 600cc (20.3 oz) aluminum cup with lid
- With a metal air regulator, a cleaning brush and a multi-size wrench
- 1.3mm,1.5mm,1.7mm nozzle optional



A17A051
HVLP Gravity Spray Gun

- Painting Fan: 18cm 26cm
- Air Consumption: 6 10cfm
- Cup Capacity: 600ml
- Nozzle Size: 1.4mm,1.7mm,2.0mm
- Fluid(water)Delivery: 160-240ml/min
- Weight:727g • Air inlet:1/4"
- Recommend Working Pressure: 2.5bar(36PSI)
- Applications & Features:
- 1.Brand new appearance design independent patent.
- 2.Professional atomization structure design to ensure the best effect.
- 3.The innovative design for adjustment knob increase the dynamic effect and make in more comfortable.
- 4.Adjust the focus automatically with flexible pothook.
- 5.Automatic precision forging manufacture on aluminum body.
- 6.Universal intake connectors, rotate 360



A17A045
H.V.L.P Traditional Spray Gun
Aluminum Gun Body with 600cc
Aluminum Cup

- Brass air cap with nozzle set
- Optimal working pressure: 43~58 psi
- Air consumption: 6~11 cfm
- Nozzle size: 1.4 or 1.5 or 2.0 mm
- Air inlet:1/4"NPT
- Cup: aluminum 600cc
- Chrome plated aluminum body
- Regulator gauge can be choose
- Brush spanner



A17A052 HVLV Gravity Spray Gun

- Painting Fan: 18cm-26cm
- Air Consumption: 6-10cfm
- Cup Capacity: 600ml
- Nozzle Size: 1.4mm,1.7mm,2.0mm
- Fluid(water)Delivery: 160-240ml/min
- Weight:727g
- Air inlet:1/4"
- Recommend Working Pressure: 2.5bar(36PSI)
- Applications & Features:
 1. Brand new appearance design independent patent.
 2. Professional atomization structure design to ensure the best effect.
 3. The innovative design for adjustment knob increase the dynamic effect and make in more comfortable.
 4. Adjust the focus automatically with exible pothook.
 5. Automatic precision forging manufacture on aluminum body.
 6. Universal intake connectors, rotate 360



A17A061 HVLV Gravity Spray Gun

- Air Consumption: 6-10cfm
- Cup Capacity: 600ml
- Nozzle Size: 1.4mm,1.7mm,2.0mm
- Fluid(water)Delivery: 160-240ml/min
- Weight:710g
- Air inlet:1/4"
- Recommend Working Pressure:30-43PSI
- Applications & Features
 1. Get a superior finish and save paint at the same time.
 2. High volume low pressure technology applies paint with less fore,meaning less paint "bounces" o the surface into the air.
 3. Stainless steel needle and tip allow use with water-based material.



A17A062 Mini Air Gravity Spray Gun

- Applications and Features
 1. Lightweight, easy to control, perfect for touch-up and detail work.
 2. Three adjustment for stepless, round and at spray.
 3. Get a superior finish and save paint at the same time.
 4. High volume low pressure technology applies paint with less force, meaning less paint "bounces" o the surface into the air.
 5. Stainless steel needle and tip allow use with water-based material.
- Air Consumption:2-5cfm
- Cup Capacity:100ml
- Nozzle Size:0.8mm,1.0mm
- Fluid(water)Delivery: 50-80ml/min
- Weight:320g
- Air inlet:1/4"
- Recommend Working Pressure:(30-43PSI)



A17B003 High Pressure Air Spray Gun

- Applications & Features:
 - High efficiency transfer. Durable and stable performance
 - Reliable choice for medium viscosity painting of middle, bottom coating on cars, machinery, furniture and etc.
 - Color available: Polishing color, powder coating in any colors, chrome plated, nickel plated, anodized paint color

ITEM NO.	TYPE MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT				AIR PRESSURE	AIR INLET
				Standard	Range			kg	lbs	psi	kg/cm²		
				cfm	mm			ml	ml/min	kg	lbs		
A17B003	F-2000	High Pressure (Suction feed)	5-10	2	1.8-2.5	1000	180-240	0.88	1.45	50	3.5	1/4"	



A17B007 High Pressure Air Spray Gun

- Applications & Features:
 - High efficiency transfer. Durable and stable performance
 - Reliable choice for medium viscosity painting of middle, bottom coating on cars, machinery, furniture and etc.
 - Color available: Polishing color, powder coating in any colors, chrome plated, nickel plated, anodized paint color.

ITEM NO.	TYPE MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT				AIR PRESSURE	AIR INLET
				Standard	Range			kg	lbs	psi	kg/cm²		
				cfm	mm			ml	ml/min	kg	lbs		
A17B007	PQ-2U	High Pressure (Suction feed)	5-10	1.8	1.8-2.5	1000	180-240	0.74	1.03	50	3.5	1/4"	



A17B011 High Pressure Air Spray Gun

- Applications & Features:
 - High efficiency transfer. Durable and stable performance
 - Reliable choice for medium viscosity painting of middle, bottom coating on cars, machinery, furniture and etc.
 - Color available: Polishing color, powder coating in any colors, chrome plated, nickel plated, anodized paint color.

ITEM NO.	TYPE MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT				AIR PRESSURE	AIR INLET
				Standard	Range			kg	lbs	psi	kg/cm²		
				cfm	mm			ml	ml/min	kg	lbs		
A17B011	PQ-2UA	High Pressure (Suction feed)	5-10	1.8	1.8-2.5	1000	180-240	0.61	1.34	50	3.5	1/4"	



A17B027 High Pressure Spray Gun with 1000cc Alu.Cup

- High Pressure Spray Gun
- Alu Gun Body with 1000cc Alu.Cup
- Optimal Working Pressure:3-5Bar
- Air Consumption:4.5-8cfm
- Nozzle Size:1.2-1.5-1.8
- Air Inlet:1/4(bsp/nps/npt)



A17B045 High Pressure Spray Gun with 600cc Plastic Cup

- High Pressure Spray Gun
- Alu Gun Body with 600cc Plastic Cup
- Optimal Working Pressure:3-5Bar
- Air Consumption:6-10cfm
- Nozzle Size:1.2-1.5-1.8
- Air Inlet:1/4(bsp/nps/npt)



A17B055 High Pressure Spray Gun with 400cc Alu.Cup

- High Pressure Spray Gun
- Alu Gun Body with 400cc Alu.Cup
- Optimal Working Pressure:4-8Bar
- Air Consumption:7-12cfm
- Nozzle Size:2.0-2.5-3.0
- Air Inlet:1/4(bsp/nps/npt)



A17C003 Low Pressure Air Spray Gun

- Applications & Features:
 - High efficiency transfer. Durable and stable performance
 - Reliable choice for interior and exterior wall painting, fence painting and etc.
 - Color available: Powder coating in any colors, chrome plated.

ITEM NO.	TYPE MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT				AIR PRESSURE	AIR INLET
				Standard	Range			kg	lbs	psi	kg/cm²		
				cfm	mm			ml	ml/min	kg	lbs		
A17C003	S112	Low Pressure (Suction feed)	2-0	1.5	1.3-1.5	1000	180-240	0.0	1.32	30	2.5	1/4"	



A17C005 Low Pressure Air Spray Gun

- Applications & Features:
 - High efficiency transfer. Durable and stable performance
 - Reliable choice for interior and exterior wall painting, fence painting and etc.
 - Color available: Powder coating in any colors, chrome plated

ITEM NO.	TYPE MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT				AIR PRESSURE	AIR INLET
				Standard	Range			kg	lbs	psi	kg/cm²		
				cfm	mm			ml	ml/min	kg	lbs		
A17C005	4/2A	Low Pressure (Suction feed)	2-0	1.5	1.2-1.5	1000	180-240	0.46	1.01	30	2.5	1/4"	



A17C009 Low Pressure Spray Gun Aluminum Gun

- Optimal working pressure: 30-50 psi
- Air consumption: 3-4.5 cfm
- Nozzle size: 1.0 or 1.4 mm
- Air inlet: 1/4"NPT
- Cup:aluminum 1000cc
- Aluminum gun body with spray plastic



A17C007 Low Pressure Spray Gun with 1000cc Alu.Cup

- Low Pressure Spray Gun
- Alu.Gun Body with 1000cc Cup
- Optimal Working Pressure:2-3.5Bar
- Air Consumption:3-4.5cfm
- Nozzle Size:0.6-0.8-1.0-1.3-1.5
- Air Inlet:1/4(bsp/nps/npt)



A17C023 Low Pressure Spray Gun With 1000cc Cup

- Optimal working pressure: 40 psi
- Air consumption: 2.0cfm
- Nozzle size: 1.3mm
- Air inlet: 1/4"NPT
- With 1000cc aluminum cup



A17C011 Low Pressure Air Spray Gun

- Applications & Features:
- High efficiency transfer. Durable and stable performance
- Reliable choice for interior and exterior wall painting, fence painting and etc.
- Color available: Powder coating in any colors, chrome plated.

ITEM NO.	TYPE MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT			AIR PRESSURE	AIR INLET
				Standard	Range			mm	ml	ml/min		
A17C011	472B	Low Pressure (Suction feed)	2-5	1.3	1.3-1.5	750/1000	180-240	0.58	0.28	30	2.5	1/4"



A17C013 Low Pressure Air Spray Gun

- Applications & Features:
- High efficiency transfer. Durable and stable performance
- Reliable choice for interior and exterior wall painting, fence painting and etc.
- Color available: Powder coating in any colors, chrome plated.

ITEM NO.	TYPE MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT			AIR PRESSURE	AIR INLET
				Standard	Range			mm	ml	ml/min		
A17C013	472C	Low Pressure (Suction feed)	2-8	1.3	1.3-1.5	600	180-240	0.58	0.28	30	2.5	1/4"



A17D003 High Performance Spray Gun (Excellent Atomization)er

- Applications & Features: Excellent atomization spray gun can high efficiency transfer, perfect atomization, durable and stable performance ideal for medium viscosity painting of middle or ottom coating on cars, machinery furniture and etc.

ITEM NO.	MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT			AIR PRESSURE	AIR INLET
				Standard	Range			mm	ml	ml/min		
A17D003	4001	High Performance	4-8	1.8	1.4-2.5	1000	160-240	0.61	1.34	50	3.5	1/4"



A17D007 High Performance Spray Gun (Excellent Atomization)

- Applications & Features:Excellent atomization spray gun can high efficiency transfer, perfect atomization,durable and stable performance ideal for medium viscosity painting of middle or bottom coating on cars, machinery furniture and etc.

ITEM NO.	MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT			AIR PRESSURE	AIR INLET
				Standard	Range			mm	ml	ml/min		
A17D007	100	High Performance	5-10	1.0	1.3-2.0	600	100-180	0.55	1.21	50	3.5	1/4"



A17D011 High Performance Spray Gun (Excellent Atomization)

- Applications & Features: Excellent atomization spray gun can high efficiency transfer, perfect atomization,durable and stable performance ideal for medium viscosity painting of middle or bottom coating on cars, machinery furnitureand etc.

ITEM NO.	MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT			AIR PRESSURE	AIR INLET
				Standard	Range			mm	ml	ml/min		
A17D011	HR101	High Performance	10	1.8	1.2-2.0	1000	170-270	0.62	1.8	60	3.5	1/4"



A17D015 High Performance Spray Gun (Excellent Atomization)

- Applications & Features: Excellent atomization spray gun can high efficiency transfer, perfect atomization,durable and stable performance ideal for medium viscosity painting of middle or bottom coating on cars, machinery furnitureand etc.

ITEM NO.	MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT			AIR PRESSURE	AIR INLET
				Standard	Range			mm	ml	ml/min		
A17D015	11N-1	High Performance	4-8	1.5	1.5	600	160-240	0.68	1.5	45	3	1/4"



A17D035 Automotive Coating Spray Gun With 250CC Plastic Cup

- Automotive Coating Spray Gun
- Alu. Gun Body With 250CC Plastic Cup
- Optimal working pressure: 2.5Bar
- Air Consumption: 4Cfm
- Nozzle Size:0.5-0.8-1.0-1.2mm
- Air Inlet:1/4(bsp/nps/npt)



A17D037 Automotive Coating Spray Gun

- Automotive Coating Spray Gun
- Alu. Gun Body With 600CC Plastic Cup
- Optimal working pressure: 2Bar
- Air Consumption:15.2Cfm
- Nozzle Size:1.3-1.4-1.6-1.8-2.0mm
- Air Inlet:1/4(bsp/nps/npt)



A17E003 Air Hopper Gun & Paint Tank

- Durable Alum. hopper cup with handle.
- Adjustable material control for perfect performance.
- Die-cast alum. gun body.
- Three nozzles(4,6,8mm) are included in each gun.



A17E005 Air Hopper Aluminum Gun Body With 6000ml Plastic Cup

- Optimal working pressure: 60-115 psi
- Air consumption: 8-14 cfm
- Nozzle size: 4 and 6 and 8 mm
- Air inlet: US quick coupler
- Cup: plastic 6000ml



A17E007 Air Hopper with 6000ml Alu.cup

- Air Hopper
- Alu.Gun Body with 6000ml Alu.cup
- Optimal Working Pressure:4-8bar
- Air Consumption:8-14cfm
- Nozzle Size:4-6-8
- Air Inlet:1/4(bsp/nps/npt)



A17E011 Air Hopper Gun & Paint Tank

- Durable plastic hopper cup with handle.
- Adjustable material control for perfect performance.
- Die-cast alum. gun body.
- Three nozzles(4,6,8mm) are included in each gun.



A17E023
Air Hopper Gun & Paint Tank

- Stainless steel hopper cup with handle.
- Adjustable material control for perfect performance.
- With brass ball valve.



A17E027
Air Hopper Gun & Paint Tank

- Plastic hopper cup with handle.
- Adjustable material control for perfect performance.
- With 3 nozzles.



A17E135
9.2kg Capacity Stucco Sprayer Hopper Gun

- This can be used for plastering a stucco house
- It can also be used for applying plaster mixes and more
- Steel hopper with brass fittings
- Hopper hold:9.2kg
- Air inlet hose diameter:8mm
- Working pressure:6 bar
- Suggested air compressor:3-5Hp
- Weight:2kg
- Length:57cm



A17F003
Air Brush

- Feed Type:Suction
- Standard Nozzle Dia:0.8mm
- Alternative Nozzle Size: 0.3mm,0.5mm,0.8mm
- Glass Cup:2*22CC
- Pu Air Hose:5FT
- Regulator:G1/4(F)-M5(M)
- Single-Action Trigger Air-paint Control
- With Plastic Body
- Carton Dimension: 57x39x28CM
- PCS/CTN:50
- N.W./G.W:15.5/18KGS



A17F005
Air Brush

- Single action Airbrush
- Spray pattern adjusts from 1/4" to 1-1/2"for maximum versatility.
- 5ft. vinyl hose

MODEL	FEED TYPE	NOZZLE DIA.	CUP CAPACITY	WORKING PRESSURE	CARTON DIMENSION	PCS/CTN
		mm	CC/ML	PSI	mm	
A17F005	SUCTION	0.5	220(glass jar)	15-50	1-3.5	50*35*23



A17F007
Air Brush

- Dual action Airbrush
- Model painting, Amateur hobby, automotive graphic, helmet, craft working, and general airbrushing.

MODEL	FEED TYPE	NOZZLE DIA.	CUP CAPACITY	WORKING PRESSURE	CARTON DIMENSION	PCS/CTN
		mm	CC/ML	PSI	mm	
A17F007	DUAL ACTION	0.2-0.3	7	15-50	1-3.5	47*31*23.5



A17F009
Air Brush

- Feed Type:Gravity
- Standard Nozzle Dia:0.3mm
- Alternative Nozzle Size: 0.2mm,0.3mm,0.5mm
- Cup Capacity:7CC
- Working Pressure:15-50PSI
- Dual-Action Trigger Air-paint Control
- Carton Dimension(CM) 55.5x42x25 .PCS/CTN:50
- N.W./G.W:15/17.5KGS



A17F013
Air Brush

- Dual action Airbrush
- Model painting, Amateur hobby, automotive graphic, helmet, craft working, and general airbrushing.
- 5ft. vinyl hose

MODEL	FEED TYPE	NOZZLE DIA.	CUP CAPACITY	WORKING PRESSURE	CARTON DIMENSION	PCS/CTN
		mm	CC/ML	PSI	mm	
A17F013	DUAL ACTION	0.3	5-700(glass jar)	15-50	1-3.5	52*32*26.5



A17F015
Air Brush

- Feed Type:Gravity
- Standard Nozzle Dia:0.2mm
- Alternative Nozzle Size: 0.2mm,0.3mm,0.5mm
- Cup Capacity:9CC
- Working Pressure:15-50PSI
- Dual-Action Trigger Air-paint Control
- Carton Dimension(CM) 51x39x28 .PCS/CTN:50
- N.W./G.W:15/17.5KGS



A17F019
Air Brush

- Feed Type:Gravity & Suction
- Standard Nozzle Dia:0.3mm
- Alternative Nozzle Size: 0.2mm,0.3mm,0.5mm
- Cup Capacity:7CC & 22CC
- Working Pressure:15-50PSI
- Dual-Action Trigger Air-paint Control
- Carton Dimension (CM)57x39x28 .PCS/CTN:50
- N.W./G.W:16/18.5KGS



A17F513
Airbrush Compressor Kit

- AC transformer.
- AMP: 1.6A.
- Input AC100-240V 50/60HZ 0.6A.
- Air ow: 10.5L/min.
- Output DC 12V 1.6A.
- Auto stop: 25psi.
- Auto start: 15psi.
- Input AC 100-240V 50/60HZ 350MA.
- Working pressure: 2-15psi.
- Output DC 12V 500MA.
- Dual action Airbrush.
- Nozzle: Dia. 0.2mm, 0.3mm (normal 0.3mm).
- Cup Capacity: 7CC.
- Working Pressure: 15-30PSI.
- CE/ROHS/UL/GS/ETL AC adapter.



A17F017
Air Brush

- Dual action Airbrush
- Model painting, Amateur hobby, automotive graphic, helmet, craft working, and general airbrushing.
- 5ft. vinyl hose

MODEL	FEED TYPE	NOZZLE DIA.	CUP CAPACITY	WORKING PRESSURE	CARTON DIMENSION	PCS/CTN
		mm	CC/ML	PSI	mm	
A17F017	DUAL ACTION	0.2-0.3	7	15-50	1-3.5	47*31*23.5



A17F023
Air Brush

- Double-action Airbrush
- Model painting, Amateur hobby, automotive graphic, helmet, craft working, and general airbrushing.
- 80ft. vinyl hose

MODEL	FEED TYPE	NOZZLE DIA.	CUP CAPACITY	WORKING PRESSURE	CARTON DIMENSION	PCS/CTN
		mm	CC/ML	PSI	mm	
A17F023	DUAL ACTION	0.3-0.5	22cc	15-50	1-3.5	50*31*23



A17F027
Air Brush

- Single-action Airbrush
- Model painting, Amateur hobby, automotive graphic, helmet, craft working, and general airbrushing.

MODEL	FEED TYPE	NOZZLE DIA.	CUP CAPACITY	WORKING PRESSURE	CARTON DIMENSION	PCS/CTN
		mm	CC/ML	PSI	mm	
A17F027	SUCTION	0.3-0.5	22cc	15-50	1-3.5	50*31*23



A17F523
Airbrush Compressor Kit-Heart Shape

- MOTOR: DC 12V: AMP: 1.6A.
- Air ow: 10.5L/min; Working pressure: 2-15psi.
- Pressure adjust way: Electronic control 3 tap position.
- AC transformer:Input AC100-240V 50/60HZ 0.6A.
- Output DC 12V 1.6A.
- AC charger:input AC 100-240v 50/60hz 350MA.
- Output DC 12V 500MA.
- Dual action Airbrush.
- Nozzle: Dia. 0.2mm, 0.3mm (normal 0.3mm).
- Cup Capacity: 7CC.
- Working Pressure: 15-30PSI.
- CE/ROHS/UL/GS/ETL AC adapter.



A17F613
Airbrush Compressor Kit

- This high-quality airbrushing kit is perfect illustration, photo retouching, temporary tattoos, cake decorating, crafts, hobbies and any/other airbrushing items.
- Including:
 - 1* airbrush compressor TC-802
 - 1* air hose AH-24
 - 1* airbrush holder AH-305(optional)
 - 1* dual-action airbrush AB-130(optional)



A17F623 Airbrush Compressor Kit

- Suitable airbrush: 0.2-1.0 Nozzle
- Power: 1/5 HP
- Speed/min (50Hz): 1450
- Auto stop: 4bar/57Psi
- Air flow: 23-25 L/min
- Adapter: 1/8 BSP
- N.W.: 3.5KG
- Single Dim: 25.5*13.5*17
- Carton Dim: 50*29.5*51.5
- PCS/CTN: 6Pcs
- Weight N.W/G.W: 21/24



A17F633 Airbrush Compressor Kit

- Suitable airbrush: 0.2-1.0 Nozzle
- Power: 1/5 HP
- Speed/min (50Hz): 1450
- Auto stop: 4bar/57Psi
- Air flow: 23-25 L/min
- Adapter: 1/8 BSP
- N.W.: 3.6KG
- Single Dim: 25.5*13.5*20.5
- Carton Dim: 50*29.5*51.5
- PCS/CTN: 6Pcs
- Weight N.W/G.W: 21.6/24.6



A17G005 L.V.M.P Spray Gun

- (Left: A17G005; Middle: A17G006; Right: A17G007)
- Painting Distance: 19cm-27cm
- Length of Sprayingswath: 17cm-19cm
- Air Consumption: 8cfm
- Cup Capacity: 600ml
- Nozzle Size: Standard 1.3mm
- Optional Size: 1.1mm, 1.4mm
- Recommend Working Pressure: 2bar 2.5bar 29PSI 36PS
- Features:
 1. Ergonomic design body Lightweight and exible good feeling
 2. Chrome plated or electrophoresis body easy for cleaning and maintenance
 3. Auto compact needles esals easy for maintenance
 4. 360 rotating joint easy for painting operation
 5. Stainless steel nozzle needle cup connector and trigger allow use with water based material ensure high quality to improve high efficiency
 6. Wide and uniform spraying swath ensure to improve high efficiency
 7. Finishing all tests adjustment one by one ensure to crest excellent atomization Smooth painting film and excellent painting effects
 8. Low air consumption high transfer efficiency and low over spray to reach low cost less pollution



A17G015 Mini L.V.M.P Spray Gun

- Model:
- Painting Distance: 8cm-13cm
- Fluid(Water)Delivery: 30-80ml/min
- Air Consumption: 1-4scfm
- Cup Capacity: 100ml
- Nozzle Size: 0.8mm, 1.0mm
- Recommend Working Pressure: 22PSI



A17G016 L.V.M.P Spray Gun

- Model:
- Painting Distance: 8cm--26cm
- Fluid(Water)Delivery: 160 -240ml/min
- Air Consumption: 6-10scfm
- Cup Capacity: 600ml
- Nozzle Size: 1.3mm, 1.7mm, 2.0mm
- Recommend Working Pressure: 30PSI-35PSI



A17H021 L.V.L.P Series Spray Gun With 600CC Plastic Cup

- Automotive Coating Spray Gun
- Alu. Gun Body With 250CC Plastic Cup
- Optimal working pressure: 2.5Bar
- Air Consumption: 4Cfm
- Nozzle Size: 0.5-0.8-1.0-1.2mm
- Air Inlet: 1/4(bsp/nps/npt)



A17X004 H.V.L.P Spray Gun Aluminum Gun Body With 1000cc Aluminum Cup and Air Regulator

- Optimal working pressure: 60-115 psi
- Air consumption: 10-13 cfm
- Nozzle size: 1.8 or 2.0 mm
- Air inlet: 1/4"NPT
- 1pc regulator gauge



A17X005 H.V.L.P Traditional Spray Gun Aluminum Gun Body With 600cc Plastic Cup

- Optimal working pressure: 43-58 psi
- Air consumption: 6-11 cfm
- Nozzle size: 1.4 or 1.7 or 2.0 or 2.5 mm
- Air inlet: 1/4"NPT
- With 600cc plastic cup
- 1pc regulator gauge
- Brush spanner



A17X006 H.V.L.P Traditional Spray Gun Aluminum Gun (6-11 cfm)

- 1pc spray gun:
- Brass air cap with nozzle set
- Optimal working pressure: 43-58 psi
- Air consumption: 6-11 cfm
- Nozzle size: 1.4 or 1.7 or 2.0 or 2.5 mm
- Air inlet: 1/4"NPT
- 600cc plastic cup
- 1pc regulator gauge
- Extra 1pc air cup nozzle needle



A17X011 H.V.L.P Traditional Spray Gun Aluminum Gun Body With 800cc Aluminum Cup

- Optimal working pressure: 40-60 psi
- Air consumption: 6-11 cfm
- Nozzle size: 1.3 or 1.5 or 1.8 mm
- Air inlet: 1/4"NPT
- With regulator gauge
- Cup: aluminum 800cc
- Chrome plated aluminum body
- Brush spanner



A17X007 6pc H.V.L.P Spray Gun Kit

- 6PC H.V.L.P Spray Gun Kit(A17X007)
- 1PC H-827 spray gun,
- 1PC H-2000 spray gun,
- 1PC 1000ml aluminum cup,
- 1PC air regulator, Double blister
- H.V.L.P Spray Gun W/regulator(A17x003)



A17X012 2pc Spray Gun Kit

- 1pc spray gun:
- Brass air cap with nozzle set
- Optimal working pressure: 43-58 psi
- Air consumption: 6-11 cfm
- Nozzle size: 1.4 or 1.7 or 2.0 or 2.5 mm
- Air inlet: 1/4"NPT
- 600cc plastic cup
- 1pc spray gun:
- Optimal working pressure: 25-50 psi
- Air consumption: 3-5 cfm
- Nozzle size: 0.5 or 0.8 or 1.0 mm
- Air inlet: 1/4"NPT
- 125cc plastic cup



A17X008 H.V.L.P Traditional Spray Gun Aluminum Gun Body With 200cc Aluminum Cup

- Optimal working pressure: 25-50 psi
- Air consumption: 3-5 cfm
- Nozzle size: 0.8 or 1.0 or 1.2mm
- Air inlet: 1/4"NPT
- With 200cc aluminum cup
- Chrome plated aluminum body
- Regulator gauge can be choose
- Brush spanner



A17X013 H.V.L.P Traditional Spray Gun Aluminum Gun Body with 600cc Aluminum Cup

- Brass air cap with nozzle set
- Optimal working pressure: 43-58 psi
- Air consumption: 6-11 cfm
- Nozzle size: 1.4 or 1.5 or 2.0 mm
- Air inlet: 1/4"NPT
- Cup: aluminum 600cc
- Chrome plated aluminum body
- Regulator gauge can be choose
- Brush spanner



A17X017 Spray Gun Kit

- 2pcs spray guns:
- Brass air cap with nozzle set
- Optimal working pressure: 43-58 psi
- Air consumption: 6-11 cfm
- Nozzle size: 1.4 or 1.5 or 2.0 mm
- Air inlet: 1/4"NPT
- 600cc aluminum or plastic cup
- Aluminum body with electrophoresis
- 1pc spray gun:
- Optimal working pressure: 25-50 psi
- Air consumption: 3-5 cfm
- Nozzle size: 0.8 or 1.0 or 1.2mm
- Air inlet: 1/4"NPS/NPT
- 200cc aluminum cup or 125cc plastic cup
- Aluminum body with electrophoresis
- With 1pc air regulator



A17X023 3pc Hvlp Spray Gun Kit

- 3PC Hvlp Spray Gun Kit(A17X023)
- 1PC-big HVLP spray gun
1.4mm nozzle size 1000ml aluminum cup
- 1PC-big HVLP spray gun
1.7mm nozzle size 1000ml aluminum cup
- 1PC-Regulator
- 4PC HVLP Spray Gun Kit(A17X024)
- 1PC-Detail small HVLP spray gun
0.8mm nozzle size 100ml aluminum cup
- 1PC-big HVLP spray gun
1.4mm nozzle size 1000ml aluminum cup
- 1PC-big HVLP spray gun
1.7mm nozzle size 1000ml aluminum cup
- 1PC-Regulator



A17X027 7pcs Air Spray Gun Kit

- Including: 2PC H-827 spray gun,
1PC H-2000 spray gun, 1PC air regulator,
Aluminum case.
- Model: H-827
- Air Pressure: 3.0bar/43psi
- Air Cons.: 6cfm
- Pattern Width: 24cm
- Feed Type: Gravity
- Cup Size: 1000ml aluminum
- Nozzle Size: 1.4mm, 1.7mm, 2.0mm
- Air Inlet: 1/4"
- Model: H-2000
- Air Pressure: 3.0bar/43psi
- Air Cons.: 3-5cfm
- Pattern Width: 10cm
- Feed Type: Gravity
- Air Inlet: 1/4"
- Cup Size: 125ml aluminum
- Nozzle Size: 0.8mm, 1.0mm



A17X031 9pc H.V.L.P Spray Gun Kit

- 1pc 1.8mm Primer Spray Gun.
- 1pc 1.4mm Topcoat Spray Gun.
- 1pc 1.0mm Touch-up Spray Gun.
- 2 pc 1 Liter Aluminum Cups.
- 1pc 125cc Stainless Steel Cup.
- Also includes: 1pc Regulator
(0-180 PSI 0-12 BAR); 1pc Face Mask;
1pc Cleaning Kit; 1pc Spanner Wrench;
1pc Hex Wrench; 1pc Brush; 2pc Filters.



A17X033 Spray Gun Kit

- 1pc spray gun:
- Brass air cap with nozzle set
- Optimal working pressure: 43-58 psi
- Air consumption: 6-11 cfm
- Nozzle size: 1.4 or 1.7 or 2.0 or 2.5 mm
- Air inlet: 1/4"NPT
- 600cc plastic cup
- 1pc spray gun:
- Optimal working pressure: 25-50 psi
- Air consumption: 3-5 cfm
- Nozzle size: 0.5 or 0.8 or 1.0 mm
- Air inlet: 1/4"NPT
- 25cc plastic cup
- With 1pc air regulator
- With 2pcs wrench
- With 1pc toothbrush
- With 1pc wire brush



A17X051 5pcs Air Tool Kit

- Pack of compressed air tools and accessories suitable for all leading makes of compressor.
- High performance suction feed spray gun with composite bayonet type pot lid,
- Tire inflator with gauge,
- Paraffin/detergent spray gun,
- Air blow gun
- Coiled air hose.
- Components are fitted with 1/4" threaded unions.



A17X053 Air Spray Gun Kit

- Spray paint gun(aluminum cup:
750cc,1000cc optional)
- Blowing air gun
- Washing gun
- In flating gun
- Spring hose
- Mainly used for car maintaining.
- It can supply, spray painting, blowing o
dust, pum-ping air to cars.



A17X058 Air Spray Gun Kit

- Spray paint gun(aluminum cup:
750cc,1000cc optional)
- Blowing air gun
- Washing gun
- In flating gun
- Spring hose
- Mainly used for car maintaining.
- It can supply, spray painting, blowing o
dust, pum-ping air to cars.



A17Y035 Spray Gun Fliters

- Reduces paint defects.
- Traps moisture, rust, scale and oil aerosols that pass through conventional fliters.
- Fliters in a shbowl.
- Specifications:
- 1/4" NPT fittings.
- Removal Rating: .01 Microns.
- Max Flow @ 80 psi: 30 CFM.
- Maximum Pressure: 100 psi



A17X054 Air Spray Gun Kit

- Spray paint gun(aluminum cup:750cc,
1000cc optional)
- Blowing air gun
- Washing gun
- In flating gun
- Spring hose
- Mainly used for car maintaining.
- It can supply, spray painting, blowing o
dust, pum-ping air to cars.



A17Y005 Gravity Feed Spray Gun Stand

- Works with most popular sizes of spray guns and cups.
- Strain paint and oil spray guns with less mess.



A17Y037 Spray Gun Filer 3 PC

- Reduces moisture, rust, scale and oil aerosols that pass through conventional fliters.
- 1/4" NPT Fittings.
- Removal rating: .01 Microns.
- Max Flow @ 80PSI:30CFM.
- Maximum pressure: 100PSI.



A17X057 Air Spray Gun Kit

- Spray paint gun(aluminum cup:
750cc,1000cc optional)
- Blowing air gun
- Washing gun
- In flating gun
- Spring hose
- Mainly used for car maintaining.
- It can supply, spray painting, blowing o
dust, pum-ping air to cars.



A17Y007 Universal Spray Gun Stand

- Quick and Easy Installaiton.
- Place universal spray gun stand clamp around paint inlet
- Tighten screw with provided wrench until snug
- Universal spray gun stand folds up when ready for spraying
- Fold universal spray gun stand down to rest on workbench.



A17Y050 2 Quart Paint Cup With Air Spray Gun

- Complete with paint tank, air regulator set, safety valve, outlet valve, Paint exit hole.
- Seamless steel pressure tank in dacromet treatment for long durability.
- Good application for large area coverage at spray booths, workshops, gardens and etc.
- Air inlet:1/4".



A17Y051
2-1/2 Gallon Pressure Paint Tank

- Holds 2-1/2 gallons of paint for longer spraying between refills
- Use with most non-abrasive and non-corrosive materials
- Great for texturing walls
- Controlled airflow
- Safety valve



A17Y053
Painting Tank Pneumatic Agitation

- Rated air pressure:60~115psi
- Mixing type:automatic
- Ferrous tank capacity:10L
- With 4pcs universal wheels



A17Y055
20L Pressure Paint Tank

- Big capacity tank perfect for big area spraying like in/out wall, door, machinery etc.
- One-piece format tank.
- Paint outlet:1/4", 3/8"
- Mounted on Wheels. On/O air ball valve.
- Large lid clasp & gasket that will not fall off during lid removal
- Paint Tank(Automatic Mixing) W/Pressure
- Gauge & Adjusting Valve.



A17Y059
Paint Tank

- Material: A3 steel, Spot spray
- Operating pressure :5.5-10.3bar
- Tank capacity: 32OZ
- Surface treatment: powder coating
- Sturdy construction and compact design makes this products the ideal choice for both amateur and professional.
- Pressure spray gun equipped with pressure gauge and fluid pressure regulator for accurate settings
- Twin set of hoses permits easy movement and operation of spray gun
- Excellent for large areas such as buses, trucks, and vans



A17Y063
2L Paint Tank With High Pressure Spray Gun

- Rated air pressure:60~115psi
- Mixing type:automatic
- Aluminum tank capacity:2L
- With 2m air and fluid hose
- Optimal working pressure:60~115 psi
- Air consumption:10~13 cfm
- Nozzle size:1.8 or 2.0 mm
- Air inlet:1/4"NPT
- Aluminum gun body with spray plastic
- Aluminum cup capacity:1000cc



A17Y067
8L Paint Tank With High Pressure Spray Gun

- Rated air pressure:60~115psi
- Mixing type:automatic
- Ferrous tank capacity:8L
- With 2m air and fluid hose
- Optimal working pressure:60~115 psi
- Air consumption:10~13 cfm
- Nozzle size:1.8 or 2.0 mm
- Air inlet:1/4"NPT
- Aluminum gun body with spray plastic
- Aluminum cup capacity:1000cc



A17Y069
10L Air Pressure Painting Kit

- Not exceed 80psi
- 10L steel tank with te on coating
- Green



A17Y075
Digital Pressure Gauge

- Applicable to: all models
- Display reading in "bar"
- Accuracy: 0.05 bar



A17Y103
Airbrush Holder

- Holds up to 4 airbrushes.
- Top holder swivels to help keep airbrushes balanced.
- Attach to workbench or table.
- A must-have for every airbrush artist-beginner or professional



A17Y105
Airbrush Holder

- Airbrush holder with regulator holder for 8 airbrushes and 6 individual branch valves, so you can have 6 airbrushes connected to air at the same time.
- Pressure gauge which shows the pressure in the system.



A17Y113
Spray Booth

1. Novel construction, beauty in shape, smart in bodily form.
2. It can fold and deploy, convenient to take. It is easy to use when deploy.
3. It can use one machine or combine two machines without tools.
4. full transparent work booth, it helps to control the spraying.
5. strong extract fog, and control the spraying fog extend effectively
6. wire inside, can draw out by hand and draw in automatic by pushing button
7. the light on/off switch can awake the customer to turn on the compressor on time
8. no noise motor, high anti-hunt filter net.

ITEM NO.	INPUT	MOTOR	Air Flow
A17Y107	AC100-240V	50/60Hz	DC12V 1.6A 3M³



A17Y303
23pcs Master Spray Gun Cleaning Kit

- Ideal for cleaning all types of spray guns such as: suction, gravity feed, hvlp, spot, pressure, as well as airbrushes.
- Kit includes:
 - 1pc long handled angle brush
 - 1pc long handled straight fiber brush
 - 1pc medium sized fiber brush
 - 1pc medium sized wire brush
 - 5pcs fiber brushes
 - 2pcs hobby knife holders
 - 6pcs fiber points
 - 1pc plastic handled brush
 - 3pcs detail brushes
 - 1pc bottle of cleaning solution
 - 1pc needle



A17Z003
Mini Spray Gun (Model:H-85)

ITEM NO.	MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT		AIR PRESSURE		AIR INLET
				Standard	Range			kgs	lbs	psi	kg/cm²	
A17Z003	H-85	Mini Spray Gun	2-5	1.3	1.3-1.5	300	ml/min	0.3	0.66	50	3.5	1/4"



A17Z007
Mini Spray Gun (Model:K-3)

ITEM NO.	MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT		AIR PRESSURE		AIR INLET
				Standard	Range			kgs	lbs	psi	kg/cm²	
A17Z007	K-3	Mini Spray Gun	2-5	0.5	0.5-1.0	100	ml/min	0.2	0.44	50	3.5	1/4"



A17Z009
Mini Spray Gun (Model:F-2)

ITEM NO.	MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID (WATER) DELIVERY	WEIGHT		AIR PRESSURE		AIR INLET
				Standard	Range			kgs	lbs	psi	kg/cm²	
A17Z009	F-2	Mini Spray Gun	2-5	0.5	0.5-1.0	100	ml/min	0.3	0.66	43	3	1/4"



A17Z011
Mini Spray Gun (Model:PQ-1)

ITEM NO.	MODEL	DESCRIPTION	AIR CONSUMPTION	NOZZLE SIZE		CUP SIZE	FLUID		WEIGHT		AIR PRESSURE		AIR INLET
				Standard	Range		(WATER)	DELIVERY	kgs	lbs	psi	kg/cm ²	
				cfm	mm		ml	ml/min					
A17Z011	PQ-1	Mini Spray Gun	6-10	2	2	550	180-280	0.3	0.66	50	3.5	1/4"	



A17Z201
Air Rust-proofing Gun with Cup

- Air Rust-proofing Gun with Cup.
- Capacity: 1100ml.
- Rated pressure: 0.4-0.6Mpa.
- Max pressure: 0.7Mpa.
- Air inlet: 1/4".
- Includes two exchangeable wands.



A17Z401
Black Cleaning Gun

- Black Cleaning gun
- Aluminium body
- Double the power of the Tornador Classic
- Low wear and maintenance
- Low air consumption
- Air pressure: 5.5-6.3bar
- Pot Capacity: 1000ML
- Air inlet: G1/4"
- Clean car interior, spray the atomized cleaning agent



A17Z301
Air Operated Paint Shaker

- Aluminium alloy body
- Capacity: 1 pint to 1gallon can, up to 16lbs.gross weight
- Speed up to 700 cycles per minute at 30 angle
- Air Pressure: 70-175psi
- Air Consumption: 4.3cfm with 1gallon can/16lbs



A17Z403
Cleaning Gun

- Cleaning gun
- Aluminium body
- Air pressure: 6.3-8bar
- Pot Capacity: 1000ML
- Air inlet: G1/4"
- Clean car interior, spray the atomized cleaning agent



A17Z303
Air Operated Paint Shaker

- Safer, more durable than electric machines in dusty, volatile environments
- Nonmarring jaws hold standard cans from one quart to one gallon
- Evenly mixes paint in just a few minutes
- Nonsparking, safer to use around volatile fumes
- Working pressure (psi) 40-70 PSI
- Air inlet size 1/4 in-18 NPT



A17Z405
Dry-Cleaning Gun

- For fast and efficient cleaning of all difficult to reach areas : for example ventilation slots, seat slides, dashboards etc.
- Even most persistent dirt can be removed fast and reliable through the unique technic of air-turbulence.
- Air pressure: 6.3-8bar
- Air inlet: G1/4"



A17Z413
Cleaning Gun With Brush

- Cleaning gun with brush
- Aluminium body
- Double the power of the Tornador Classic
- Low wear and maintenance
- Low air consumption
- Air pressure: 5.5-6.3bar
- Pot Capacity: 1000ML
- Air inlet: 1/4"NPT/1/4"BSP
- Clean car interior, spray the atomized cleaning agent



A17Z451
Super Foam Gun

- Less cleaning fluid
- Less water consumption
- Less waste water
- Environmental friendly
- Air pressure: 6.3-8bar
- Pot Capacity: 1000ML
- Air inlet: G1/4"
- Spray foam shampoo to car outside body



A17Z691
Air Dryer Gun

- Air consumption: 23CFM@50psi
- Recommended working pressure is 2-5 bar(29-73psi)
- Air inlet: 1/4"NPT
- Adjustable air flow
- Stainless steel air intake filter prevents contamination
- Heat treating 6061 aluminum alloy gun body
- Handle material: PP



A17Z415
Cleaning Gun With Vacuum Cleaner

- Cleaning gun with vacuum cleaner
- Aluminium body
- Double the power of the Tornador Classic
- Low wear and maintenance
- Low air consumption
- Air pressure: 5.5-6.3bar
- Pot Capacity: 1000ML
- Air inlet: 1/4"
- Clean car interior, spray the atomized cleaning agent
- 3pcs vacuum cleaner joint
- 1pc replaceable brush nozzle
- 1pc cap and vacuum dual head
- 1pc 360° joint



A17Z601
Air Dry Gun With Traingle Stand Split Type

- Arm separate
- PU coil hose extends to 4.5ft (1.37m) each size
- Air consumption is 23CFM@50psi
- Recommended working pressure is 2-5 bar(29-73psi)
- Independent adjustable air intake valve to control output
- Arm and center metal tube made of steel
- Stainless steel air intake filter prevents contamination
- Connection part made of Aluminum, Tripod made of steel
- Stand adjusts 6" to 83"(15cm-211cm) in height and 4" to 35"(10cm-89cm) in width
- Weight: about 7.12kg




A17Z435
Air Powder Coating Machine With 8oz Powder Capacity

- Air Powder Coating Machine
- Air Consumption @ 50 PSI: 10 CFM
- Operating Pressure: 15 to 40 PSI
- Max. Pressure: 50 PSI
- Air Inlet: 1/4 in. NPT
- Plastic cup capacity: 8oz for the spraying powder
- Application(s): Achieve a professional looking powder coating job right at home. Powder coating is resistant to chipping, scratches, fading, and wear.
- Feature(s): No power required, only need compressed air with filter. Easy to apply and clean up, quick color changes, and contains no harmful solvents.



A17Z603
Air Dry Gun With Traingle Stand One-piece Type

- PU coil hose extends to 15ft (4.6m) each size
- Air consumption is 23CFM@50psi
- Recommended working pressure is 2-5 bar(29-73psi)
- Independent adjustable air intake valve to control output
- Arm and center metal tube made of steel
- Stainless steel air intake filter prevents contamination
- Connection part made of Aluminum, Tripod made of steel
- Stand adjusts 6" to 83"(18cm-211cm) in height and 4" to 35"(11cm-89cm) in width
- Weight: about 7.24kg

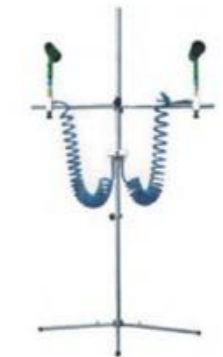

A19A005
Recoil Hose With Male Fitting

PE	NYLON	PU	LENGTH	I.D.(mm)	FITTING	Max. pressure	Working temperature	Applications
A19A005	A19A005	A19A005	5M	5/8"	1/4" male fitting	90psi	-25°C to 40°C	Other applications: water, compressed air, oil, and other liquids. Can be used with compressed air to clean equipment.
A19A011	A19A011	A19A011	10M	5/8"	1/4" male fitting	90psi	-25°C to 40°C	Other applications: water, compressed air, oil, and other liquids. Can be used with compressed air to clean equipment.
A19A021	A19A021	A19A021	5M	6.5*9.5	1/4" male fitting	180psi	-40°C to 120°C	Useful when used to clean air and other liquids. The pressure should not exceed 180psi and should not be used for cleaning.
A19A029	A19A029	A19A029	10M	6.5*9.5	1/4" male fitting	180psi	-40°C to 120°C	Useful when used to clean air and other liquids. The pressure should not exceed 180psi and should not be used for cleaning.
A19A037	A19A037	A19A037	5M	8*12	3/8" male fitting	120psi	-25°C to 70°C	Useful when used to clean air and other liquids. The pressure should not exceed 120psi and should not be used for cleaning.
A19A045	A19A045	A19A045	10M	8*12	3/8" male fitting	120psi	-25°C to 70°C	Useful when used to clean air and other liquids. The pressure should not exceed 120psi and should not be used for cleaning.
A19A053	A19A053	A19A053	50"	8*12	3/8" male fitting	120psi	-25°C to 70°C	Useful when used to clean air and other liquids. The pressure should not exceed 120psi and should not be used for cleaning.



A19B105
PU Recoil Hose With Swivel Male Fitting

PU	LENGTH	SIZE(mm)	FITTING	MAX. PRESSURE
A19B105	5M	5*8	1/4" male swivel fitting(only one side)	120psi
A19B113	10M	5*8	1/4" male swivel fitting(only one side)	120psi
A19B121	5M	6.5*9.5	1/4" male swivel fitting(only one side)	120psi
A19B129	10M	6.5*9.5	1/4" male swivel fitting(only one side)	120psi
A19B137	5M	8*12	3/8" male swivel fitting(only one side)	145psi
A19B145	10M	8*12	3/8" male swivel fitting(only one side)	145psi
A19B153	50"	8*12	3/8" male swivel fitting(only one side)	145psi



A09B205
Braided PU Recoil Hose With Male Fitting

PU(NET)	LENGTH	SIZE(mm)	FITTING	MAX. PRESSURE
A19B205	25"	6.5*9.5	1/4" male fitting	145psi
A19B213	10M	6.5*9.5	1/4" male fitting	145psi
A19B221	10M	8*12	1/4" male fitting	145psi
A19B229	50"	8*12	1/4" male fitting	145psi



A09B305
Braided PU Hose With Coupler Set

PU(NET)	LENGTH	SIZE(mm)	FITTING	MAX. PRESSURE
A19B305	10M	6.5*10	1/4" coupler set	120psi
A19B313	30M	6.5*10	1/4" coupler set	120psi
A19B321	15M	8*12	1/4" coupler set	120psi
A19B329	30M	8*12	1/4" coupler set	120psi



A19C005
Rubber Air Hose

- Tough, synthetic air hose offers excellent strength and flexibility in any temperature!
- Reinforced with polyester cord and featuring solid brass threaded male couplings for optimal durability and long service life, this all-purpose air hose is oil, gas and ozone resistant to handle a wide variety of jobs in the home, shop or garage.

RUBBER	LENGTH	SIZE(INCH)	FITTING	MAX. PRESSURE
A19C005	25FT	1/4"	1/4" male fitting	220psi
A19C013	100FT	1/4"	1/4" male fitting	220psi
A19C021	25FT	3/8"	1/4" male fitting	220psi
A19C029	50FT	3/8"	1/4" male fitting	220psi
A19C037	100FT	3/8"	1/4" male fitting	220psi
A19C045	50FT	1/2"	3/8" male fitting	220psi
A19C053	100FT	1/2"	3/8" male fitting	220psi



A19C103
3/8-Inch I.D. Rubber Lead-In Air Hose

- 3 ft. x 3/8 in. I.D. Rubber Lead-In Air Hose (250 PSI).
- Black Rubber hose with 1/4"NPT brass fitting.



A19C805
Twin Welding Hose With Swivel Fitting

- Designed for welding service providers, this twin weld hose is a great addition to any welders accessory kit!
- This twin weld hose is constructed of synthetic rubber, making it ideal for both oxygen and acetylene gases.
- Features include sturdy ball bearing fittings and a working temperature up to 120 degrees F

WELDING HOSE	LENGTH	SIZE(INCH)	FITTING	MAX. PRESSURE
A19C805	25FT	1/4"	Double 1/4" Swivel Female Fitting	120psi
A19C813	50FT	1/4"	Double 1/4" Swivel Female Fitting	120psi
A19C821	100FT	1/4"	Double 1/4" Swivel Female Fitting	120psi



A19D005
Braided PVC Hose With Male Fitting

PVC(NET)	LENGTH	SIZE(INCH)	FITTING	MAX. PRESSURE
A19D005	25FT	1/4"	1/4" Swivel fitting	120psi
A19D013	50FT	1/4"	1/4" Swivel fitting	120psi
A19D021	25FT	3/8"	1/4" Swivel fitting	120psi
A19D029	50FT	3/8"	1/4" Swivel fitting	120psi
A19D037	100FT	3/8"	1/4" Swivel fitting	120psi



A19D105
Reinforced PVC Air Hose

- PVC compound tube and cover.
- High tensile strength yarn reinforcement.



A19E005
Premium Hybrid Polymer Air Hose

- Lays flat, no memory
- Superior bend radius
- Kink resistant under pressure
- Extreme all-weather flexibility, even in sub-zero temperatures! -40F ~ 150F
- Maximum working pressure: 300 PSI

HYBRID POLYMER	LENGTH	SIZE(INCH)	FITTING	WORKING TEMPERATURE
A19E005	25FT	1/4"	1/4" male fitting	-40°F ~ 150°F (-40°C ~ 65°C)
A19E013	50FT	1/4"	1/4" male fitting	
A19E021	50FT	3/8"	1/4" male fitting	
A19E029	100FT	3/8"	1/4" male fitting	
A19E037	25FT	1/2"	3/8" male fitting	
A19E045	50FT	1/2"	3/8" male fitting	



A19E101
3/8"X4' Hybrid Polymer Swivel Whip Hose

- Air inlet:1/4" NPT brass swivel fitting.
- Working/burst PSI:300 PSI/900PSI.
- Temperatures: -20 C -- 65 C .
- I.D: 9.5mm;O.D :15mm.
- Material: Rubber and PVC Blend.
- With black sleeve.
- 1/4"NPT fitting.



A19E111
1/2"X4' Hybrid Polymer Swivel Whip Hose

- Air inlet:3/8" NPT brass swivel fitting.
- Working/burst PSI:300 PSI/900PSI.
- Temperatures: -20 C -- 65 C .
- I.D: 12.5mm;O.D :19mm.
- Material: Rubber and PVC Blend.
- With black sleeve.
- 3/8"NPT fitting.



A19X105
10 Pcs PVC Air Hose Kit

- 25' PVC air hose (virgin PVC hose with 1/4" NPT brass male fittings on each end of hose)
- Standard lever blow gun (zinc plated steel construction with brass plunger and plastisol dipped handle overmold - 1/4" NPT)
- OSHA safety tip
- Taper inflation needle
- Ball foot air chuck
- Mini pencil tire gauge (5 PSI to 50 PSI)
- 1/4" female steel coupler (industrial style) with 1/4" NPT thread
- 2pcs 1/4" male steel plug (industrial style) with 1/4" NPT thread
- 1/4" female steel plug (industrial style) with 1/4" NPT thread
- Air hose have minimum max working PSI rating of 300 PSI
- Material of air hose: PVC
- Brass fitting of the air hose: 1/4" NPT male
- Fitting cannot spin and without sheath
- Size of the air hose: 6mm (inner diameter) x10mm (outer diameter)



A21A008
Manual Air Hose Reel

- Heavy-duty steel reinforced drum; powder coat
- Brake keeps hose from unwinding unintentionally
- Swivel handle pivots in hand for winding ease
- Mount reel to wall, workbench or vehicle with ease
- Apply to 3/8" ID x 50' Hose



A21A005
50ft 3/8" Metal Casing Air Hose Reel

- Each reel'S rugged metal casing protects the hose and adds years to its operating life in even the busiest of industrial workplaces.
- Its slim design is also a space saver, especially for multiple reel installations.
- Hose Material: PU Mesh
- Output Hose: 50ft
- Hose size: 8mm X12mmX15M
- Woking Pressure:150-220 PSI
- Case Material: steel painted
- Fitting: quick coupler
- Temperture:-20 C +60 C (4 F -140 F)



A21A007
Manual Air Hose Reel

- Heavy-duty steel reinforced drum; powder coat
- Brake keeps hose from unwinding unintentionally
- Swivel handle pivots in hand for winding ease
- Mount reel to wall, workbench or vehicle with ease
- Apply to 3/8" ID x 50' Hose and 3/8" ID x 100'



A21A016
3/8" 50' Air Hose Reel

- 3/8" PVC air or hybrid or rubber hose
- Air hose length: 50ft
- Lead hose length: 1m
- Hose working pressure: 300psi
- Burst pressure: 900psi
- 1/4" NPT air inlet / outlet
- A21A016 PVC air hose
- A21A017 hybrid air hose
- A21A015 rubber air hose



A21A183
25FT 3/8" Combo Air And Electric Hose Reel

- Air hose:3/8"
- Hose length:25ft
- Working pressure:300psi
- Hose material: Hybrid polymer
- Cord length:25ft
- Number of core:3
- Type: SJT / SJTOW sjt/sjtow
- Volt: 125v
- Awg & amprere:12AWG/15A
- The diameter of the disc: 345mm



A21A009
20metres 3/8" Floor Standing Air Hose Reel

- Floor standing air hose reel ideal for use with a wide range of air tools in garages and workshops.
- Featuring 20 metres of durable braided PVC hose and snap fit air inlet/outlet connections for versatility and ease of use.
- Hose size: 6.5mm X 10mm X 20 M
- Max. Working Pressure : 160 Psi
- Hose Type: PVC Hose
- Color: Blue
- Case Color: Black / Plastic



A21A121
25ft 3/8" Heavy-duty Air Hose Reel

- Heavy duty wall-, floor-, or ceiling-mount reel keeps your hoses organized and protected for longer life.
- Includes 25 ft. of 3/8" diameter rubber air hose with neoprene shell
- Spring powered auto rewind
- Four direction non-slag rollers reduce hose wear
- Machined brass fittings
- Mounts to floor, wall or ceiling
- Hose size: 25ft.3/8"
- Max. Working Pressure : 250 Psi (17 Bar)
- Hose Type: Rubber Hose
- Color: Red
- Case Color: Black / Steel



A21A010
Manual Air Hose Reel

- Steel frame & plastic drum
- Apply to 3/8" ID x 50' Hose



A21A131
25ft 3/8" Air Hose Reel

- 3/8" PVC / rubber / hybrid air hose
- Air hose length: 25ft
- Lead hose length: 1m
- Hose working pressure: 300psi
- Burst pressure: 900psi
- 1/4" NPT air inlet / outlet
- Ratchet gearing locks reel at desired hose length
- Air hose reel can be mounted wherever it is convenient
- A21A131 PVC Air Hose
- A21A132 Rubber Air Hose
- A21A133 Hybrid Air Hose



A21A213
50ft 1/4" Air Hose Reel

- 1/4" PVC or rubber or hybrid air hose
- Air hose length: 50ft
- Lead hose length: 1m
- Hose working pressure: 90psi
- Burst pressure: 300psi
- 1/4" NPT air inlet / outlet
- Ratchet gearing locks reel at desired hose length
- Air hose reel can be mounted wherever it is convenient



A21A221

50 ft. x 3/8 in. Manual 360° Swivel Air Hose Reel With Hybrid Air Hose

- 50 ft. x 3/8 in. Manual 360° Swivel Air Hose Reel.
- Hybrid Air Hose with plastic sleeve & coupler set.
- Work pressure: 300PSI
- Break pressure: 900psi.
- Temperatures: -35 C -- 65 C.
- I.D: 9.5mm; O.D :15.2mm.
- Hybrid Air Hose.



A21A225

50ft 3/8" Air Hose Reel

- 3/8" PVC / rubber / hybrid air hose
- Air hose length: 50ft
- Hose working pressure: 300psi
- Burst pressure: 900psi
- 1/4" NPT air inlet / outlet
- Air hose reel can be mounted wherever it is convenient
- A21A225 PVC air hose
- A21A226 rubber air hose
- A21A227 hybrid air hose



A21A233

50ft 3/8" Heavy-duty Air Hose Reel

- Heavy duty wall-, floor-, or ceiling-mount reel keeps your hoses organized and protected for longer life.
- Includes 25 ft. of 3/8" diameter rubber air hose with neoprene shell
- Spring powered auto rewind
- Four direction non-snap rollers reduce hose wear
- Machined brass fittings
- Mounts to floor, wall or ceiling
- Hose size: 50ft.3/8"
- Max. Working Pressure : 250 Psi (17 Bar)
- Hose Type: Rubber Hose
- Color: Red
- Case Color: Red / Steel
- A21A032 • Hose size: 50ft.3/8" PVC hose
- A21A033 • Hose size: 50ft.1/2" rubber hose



A21A037

50ft 3/8" Air Hose Reel

- 3/8" PVC / rubber / hybrid air hose
- Air hose length: 50ft
- Lead hose length: 1m
- Hose working pressure: 300psi
- Burst pressure: 900psi
- 1/4" NPT air inlet / outlet
- Ratchet gearing locks reel at desired hose length
- Air hose reel can be mounted wherever it is convenient
- A21A037 PVC Air Hose
- A21A038 Rubber Air Hose
- A21A039 Hybrid Air Hose



A21A253

50 ft. x 3/8 in. Auto Rewind Air Hose Reel With Hybrid Air Hose

- 50 ft. x 3/8 in. Auto Rewind Air Hose Reel.
- Hybrid Air Hose with plastic sleeve.
- Work pressure: 300PSI
- Break pressure: 900psi.
- Temperatures: -35 C -- 65 C.
- I.D: 9.5mm; O.D :15.2mm.
- Hybrid Air Hose.
- 1/4"NPT fitting.



A21A263

50' 3/8" Air Hose Reel

- 3/8" PVC / rubber / hybrid air hose
- Air hose length: 50ft
- Lead hose length: 1m
- Hose working pressure: 300psi
- Burst pressure: 900psi
- 1/4" NPT air inlet / outlet
- Ratchet gearing locks reel at desired hose length
- Air hose reel can be mounted wherever it is convenient
- A3# carbon steel reel
- A21A263
- A21A264
- A21A265



A21A273

50ft 3/8" Air Hose Reel

- Hose Length: 15m(outlet)+1m(inlet).
- Material: Steel+Rubber Hose.
- Hose diameter: 3/8".
- Fitting: 1/4" NPT.
- Max Working Pressure: 300PSI.
- Temperature: -5 to 45 C.



A21A313

3/8" X100FT Retractable Air Hose Reel

- 3/8" Heavy Duty Rubber Air Hose
- Heavy Gauge all Steel Reel Assembly
- Ratchet Gearing Locks Reel at Desired Hose Length
- Air Hose Reel can be Mounted Wherever it is Convenient!
- 100ft Rubber hose
- Supply 0.9M LEAD HOSE
- Hose working pressure: 300psi
- Burst Pressure : 900psi
- 1/4"NPT Air Inlet/Outlet



A21A283

50ft 3/8" Air Hose Reel

- 3/8" PVC / rubber / hybrid air hose
- Air hose length: 50ft
- Lead hose length: 1m
- Hose working pressure: 300psi
- Burst pressure: 900psi
- 1/4" NPT air inlet / outlet
- Ratchet gearing locks reel at desired hose length
- Air hose reel can be mounted wherever it is convenient
- A21A283 PVC Air Hose
- A21A284 Rubber Air Hose
- A21A285 Hybrid Air Hose



A21A413

100ft 1/4" Heavy-duty Welding Hose Reel

- The dual pedestal reel frame, spool and drum are made of heavy-gauge steel with flanged edges and stiffened ribs for maximum strength and reliability
- A sturdy latching mechanism conveniently holds the hose at your desired working length
- Field-adjustable hose roller guide is adaptable for wall, ceiling, floor or truck mount
- Corrosion-resistant powder-coat finish.
- Hose size: 100ft. 1/4"
- Max. Working Pressure : 200 Psi (14 Bar)
- Hose Type: Rubber welding hose
- Color: Red/Steel
- Case Color: Red / Steel
- A21A042 *Hose size: 50ft.1/4"



A21A303

65ft 3/8" Air Hose Reel

- 3/8" PVC / rubber / hybrid air hose
- Air hose length: 65ft
- Lead hose length: 1m
- Hose working pressure: 300psi
- Burst pressure: 900psi
- 1/4" NPT air inlet / outlet
- Ratchet gearing locks reel at desired hose length
- Air hose reel can be mounted wherever it is convenient
- A21A303 PVC Air Hose
- A21A304 Rubber Air Hose
- A21A305 Hybrid Air Hose



A21B005

25ft 1/4" AIR HOSE REEL

- Can conveniently be fastened to walls, ceiling, doors, etc.
- The hose extends from 1 up to 25 feet by just pulling and then stopping at any desired length.
- To retract, give the hose a soft jerk and then it quickly releases the hose then it automatically rewinds
- Hose size: 5mm X 8mm X 7.5M
- Max. Working Pressure : 100 Psi
- Hose Type: PU Hose
- Color: Blue
- Case Color: Yellow



A21B015
9+1m 8*12mm Air Hose Reel

- Hose Material: PU Mesh/ PU+PVC Mesh
- Output Hose: 9M Input Hose: 1M
- Working Pressure: 150-220 PSI
- Case Material: PP
- Hose size: 8mm X 12mm X 10M
- Fitting: quick coupler
- Temperature: -20 C --60 F (4 F -140 F)



A21B025
20ft 3/8" Enclosed Air Hose Reel

- The air hose reel features spring-powered auto rewind and machined brass fittings for extra durability.
- The high impact polypropylene housing won't dent or rust and the hose reel can be easily mounted to your wall or ceiling.
- Hose size: 6.5mm X 10mm X 6 M
- Max. Working Pressure : 120 Psi
- Hose Type: PVC Hose
- Color: Yellow
- Case Color: Black



A21B035
50ft 3/8" Air Hose Reel

- Lays flat, no memory
- Kink resistant under pressure
- Extreme all-weather flexibility, even in sub-zero temperatures(-40 F to 140 F)
- Excellent abrasion-resistant outer cover
- Hose size: 9.5mm X 15.5mm X 15 M
- Max. Working Pressure : 300 Psi
- Hose Type: Premium hybrid polymer hose
- Color: Green
- Case Color: Black / Plastic & Steel



A21B151-153
3/8 in. Auto Rewind Air Hose Reel With Hybrid Air Hose

- 3/8 in. Auto Rewind Air Hose Reel.
- Hybrid Air Hose with plastic sleeve.
- Work pressure: 300PSI
- Break pressure:900psi.
- Hose Temperatures: -35 C -- 65 C.
- I.D: 9.5mm;O.D :15.2mm.
- 3/8"Hybrid Air Hose.
- 1/4"NPT fitting.
- APPLICATION: An engineered hybrid polymer hose that provides extreme flexibility and durability, it is non-marking, oil resistant and performs well under cold temperatures to -31F(-35C).
- This 300 psi hose is designed for a variety of pneumatic applications in industries, construction and manufacturing.

Item No.	A21B151	A21B153
Size	50FT	65FT



A21B161
1/4"x15M Hybrid Polymer Air Hose Reel

- Air inlet: G1/4" brass fitting
- Working/burst PSI:300 PSI/900PSI
- Temperatures: -35 C -- 65 C
- I.D: 6mm;O.D :12mm
- Length: 15M+1M
- Material: Rubber and PVC Blend.
- With black sleeve.



A21B169
1/4"x10M Hybrid Polymer Air Hose Reel

- Air inlet: G1/4" brass fitting
- Working/burst PSI:300 PSI/900PSI
- Temperatures: -35 C -- 65 C
- I.D: 6mm;O.D :12mm
- Length: 8M+1M
- Material: Rubber and PVC Blend.
- With black sleeve.



A21B165
1/4"x10M Hybrid Polymer Air Hose Reel

- Air inlet: G1/4" brass fitting
- Working/burst PSI:300 PSI/900PSI
- Temperatures: -35 C -- 65 C
- I.D: 6mm;O.D :12mm
- Length: 10M+1M
- Material: Rubber and PVC Blend.
- With black sleeve.



A21B513
20m 8*12mm Air Hose Reel

- Low-speed automatic retractable rewind function.
- Specification:5/16.
- Hose Diameter: 8mmX12mm.
- Hose material:PVC. • Case Material:PP.
- Hose length:20m.
- Working pressure:18bar.
- Burst pressure:30bar.
- Accessories: 1x manual, 4x fixed bolt.
- Removable stainless steel connecting rod.



A21Y011
Swivel Wall Mount for Hose Reel

- This mount fits most hose reels.
- Heavy gauge steel wall mount.
- Black powder-coat finish.



A23A008
Air Compressor 3hp,direct Drive 10GAL

- 120V-60Hz 115PSI 3400RPM
- 10 Gallon capacity
- Thermal overload protection
- Air output: 4.5 SCFM @ 115 PSI; 5.6 SCFM @ 90 PSI;
- 6.25 SCFM @ 70 PSI; 7.2 SCFM @ 40 PSI;
- Auto shutoff @ 115 PSI; Restart @ 85 PSI.
- Working power: 2.5HP 2.0kW



A23A018
2.5Hp Direct Drive 6 Gallon Hot Dog Air Compressor

- 120V-60Hz 115PSI 3400RPM
- 6 Gallon capacity
- Thermal overload protection
- Air output: 4.3 SCFM @ 115 PSI; 4.9SCFM @ 90 PSI;
- 5.2 SCFM @ 70 PSI; 5.9 SCFM @ 40 PSI;
- Auto shutoff @ 115 PSI; Restart @ 85 PSI.
- Oil lubricated for long life
- Working power: 2.0HP 1.1kW



A23A005
13GAL. Direct Driven Air Compressor

- Light,powerful and easy for opration.
- Low oil consumption.
- Induction motor with overload protection.
- 110V,120V, 220V,230V,240V are available

ITEM NO.	TANK	EMBOI.	POWER	SPEED	NOISE	THEORETIC. DISPLACEMENT	WORK. PRESSURE	WEIGHT
A23A005	90	11	1.5	2.5	3450	270	8.8	116
A23A005	90	11	1.5	2.5	3050	270	8.8	116



A23A009
Air Compressor 3hp,direct Drive 10gal

- 120V-60Hz 115PSI 3400RPM
- 10 Gallon capacity
- Thermal overload protection
- Air output: 4.8 SCFM @ 115 PSI; 5.3 SCFM @ 90 PSI;
- 5.7 SCFM @ 70 PSI; 6.4 SCFM @ 40 PSI;
- Auto shutoff @ 115 PSI; Restart @ 85 PSI.
- Working power: 3HP 2.2kW



A23A015
13GAL. Direct Driven Air Compressor

- Light,powerful and easy for opration.
- Low oil consumption.
- Induction motor with overload protection.
- 110V,120V, 220V,230V,240V are available

ITEM NO.	TANK	EMBOI.	POWER	SPEED	NOISE	THEORETIC. DISPLACEMENT	WORK. PRESSURE	WEIGHT
A23A015	90	11	1.5	2.5	3450	270	8.8	116
A23A015	90	11	1.5	2.5	3050	270	8.8	116



A23A019
2-1/2 Hp Direct Drive 6 Gallon Hot Dog Air Compressor

- 120V-60Hz 115PSI 3400RPM
- 6 Gallon capacity
- Thermal overload protection
- Air output: 4.5 SCFM @ 115 PSI; 5.6 SCFM @ 90 PSI;
- 6.25 SCFM @ 70 PSI; 7.2 SCFM @ 40 PSI;
- Auto shutoff @ 115 PSI; Restart @ 85 PSI.
- Oil lubricated for long life
- Working power: 2HP 1.5kW



A23A021
20GAL 2HP Air Compressor

- 110V/60HZ.
- 2HP Running Hp , Peak 5hp.
- Max Pressure:125psi.
- Tank:20gal Vertical.
- Oil Lubrication Model.
- Air Displacement: 4.8CFM@40PSI. 3.8CFM@90PSI.
- Induction Motor.
- Aluminum Wire Motor.
- CSA certificate.



A23A025 8x2l Direct Driven Air Compressor

- Light,powerful and easy for opration.
- Low oil consumption.
- Induction motor with overload protection.
- 110V,120V, 220V,230V,240V are available

ITEM NO.	TANK	FREQU.	POWER	SPEED	NOISE	THEORETIC DISPLACEMENT	WORK PRESSURE	WEIGHT
A23A025	8x2	4.3	90	1.5	2	3400	81	233 8.2 8.8 125 28.5
A23A026	8x2	4.3	90	1.5	2	2800	81	192 8.7 8.8 128 28.5



A23A029 Twin Tank 2.5hp 2x2 Gallon Direct Drive Air Compressor

- 120V-60Hz 125PSI 3400RPM
- 2X2 Gallon capacity
- Twin 2-gallon tanks provide optimum air pressure for variety of contractor,
- Thermal overload protection
- Air output: 4.3 SCFM @ 115 PSI; 4.9 SCFM @ 90 PSI;
- 5.2 SCFM @ 70 PSI; 5.9 SCFM @ 40 PSI;
- Auto shutoff @ 115 PSI; Restart @ 85 PSI.
- Working power: 2HP 1.1kW



A23A035 5gal Direct Driven Air Compressor

- Light,powerful and easy for opration.
- Low oil consumption.
- Induction motor with overload protection.
- 110V,120V, 220V,230V,240V are available.

ITEM NO.	TANK	FREQU.	POWER	SPEED	NOISE	THEORETIC DISPLACEMENT	WORK PRESSURE	WEIGHT
A23A035	10	5	80	1.5	2	3400	90	233 8.2 8 115 29
A23A036	10	5	80	1.5	2	2800	90	192 8.7 8 115 29



A23A045 15l Direct Driven Air Compressor

- Light,powerful and easy for opration.
- Low oil consumption.
- Induction motor with overload protection.
- 110V,120V, 220V,230V,240V are available.

ITEM NO.	TANK	FREQU.	POWER	SPEED	NOISE	THEORETIC DISPLACEMENT	WORK PRESSURE	WEIGHT
A23A045	15	4.1	80	1.5	2	3400	90	233 8.2 8 115 25
A23A046	15	4.1	80	1.5	2	2800	90	192 8.7 8 115 25



A23B005 3hp Belt Driven Air Compressor

- Professional & Portable
- Cast iron pump,longer life
- Perfect for small, medium-sized company and garge use
- Suitable for large demand of air supply

ITEM NO.	TANK	POWER	SPEED	THEORETIC DISPLACEMENT	WORK PRESSURE	WEIGHT
A23B005	50	13	2.2	3	1020	194 6,6 8 115 67



A23B015 3hp Belt Driven Air Compressor

- Portable & heavy duty
- Cast iron pump,longer life
- Connect rod with needle bearing
- Perfect for customer demanding large supply of high pressure air

ITEM NO.	TANK	POWER	SPEED	THEORETIC DISPLACEMENT	WORK PRESSURE	WEIGHT
A23B015	80	21	2.2	3	980	152 5.4 12.5 175 88



A23B025 7.5hp Belt Driven Air Compressor

- Portable & heavy duty
- Cast iron pump,longer life
- Connect rod with needle bearing
- Perfect for customer demanding large supply of high pressure air

ITEM NO.	TANK	POWER	SPEED	THEORETIC DISPLACEMENT	WORK PRESSURE	WEIGHT
A23B025	120	32	5.5	7.5	910	600 21 12.5 175 170



A23B035 30gal. Belt Driven Air Compressor

- Portable & heavy duty
- Cast iron pump,longer life
- Connect rod with needle bearing
- Perfect for customer demanding large supply of high pressure air

ITEM NO.	TANK	POWER	SPEED	THEORETIC DISPLACEMENT	WORK PRESSURE	WEIGHT
A23B035	115	30	1.5	2	990	162 5.4 8 115 78



A23C005 5.5hp Gas Air Compressor

- Cast iron pump
- Engine power,suitable for site where electric power is not available, especially for agriculture and construction

ITEM NO.	TANK	POWER	SPEED	THEORETIC DISPLACEMENT	WORK PRESSURE	WEIGHT	ENGINE DISPLACEMENT	
A23C005	20x2	10.5	4	5.5	1020	240	8.5	8 115 80 200



A23D005 550w 9L Oil Free Air Compressor

- Optimized improved air resistance, oil-free design, stable and reliable.
- Cylinder compression chamber portion friction components using self-lubricating materials, oil-free gas compression.
- High efficiency, low energy consumption (saving 20% -25%).
- High reliability, continuous 24-hour operation. low exhaust gas temperatures.
- Air-cooled units are used, reducing installation and operating costs

ITEM NO.	TANK	POWER	SPEED	NOISE	THEORETIC DISPLACEMENT	WORK PRESSURE	WEIGHT
A23D005	9	2.4	0.55	0.7	1410	65 95 3.35 7 100 19	



A23D009 500w 10L Aluminum Tank Oil Free Air Compressor

- Optimized improved air resistance, oil-free design, stable and reliable.
- Cylinder compression chamber portion friction components using self-lubricating materials, oil-free gas compression.
- High efficiency, low energy consumption (saving 20% -25%).
- High reliability, continuous 24-hour operation.
- Low exhaust gas temperatures.

ITEM NO.	TANK	POWER	SPEED	NOISE	THEORETIC DISPLACEMENT	WORK PRESSURE	WEIGHT
A23D009	10	2.6	0.55	0.7	1400/1800	50 88 3.1 6 36 16	



A23D015 750w 30L Oil Free Air Compressor

- Optimized improved air resistance, oil-free design, stable and reliable.
- Cylinder compression chamber portion friction components using self-lubricating materials, oil-free gas compression.
- High efficiency, low energy consumption (saving 20% -25%).
- High reliability, continuous 24-hour operation.
- Low exhaust gas temperatures.
- Air-cooled units are used, reducing installation and operating costs.

ITEM NO.	TANK	POWER	SPEED	NOISE	THEORETIC DISPLACEMENT	WORK PRESSURE	WEIGHT
A23D015	30	0.75	1380	65	120	7	39



A23D025 1.1kw 50L Oil Free Air Compressor

- Optimized improved air resistance, oil-free design, stable and reliable.
- High efficiency, low energy consumption (saving 20% -25%).
- High reliability, continuous 24-hour operation.
- Low exhaust gas temperatures.

ITEM NO.	TANK	POWER	SPEED	NOISE	THEORETIC DISPLACEMENT	WORK PRESSURE	WEIGHT
A23D025	50	1.1	1400	65	210	8	40



A23D035 6.5HP 90L Oil Free Air Compressor

- Optimized improved air resistance, oil-free design, stable and reliable.
- High efficiency, low energy consumption (saving 20% -25%).
- High reliability, continuous 24-hour operation.
- Low exhaust gas temperatures.

ITEM NO.	TANK	POWER	SPEED	NOISE	THEORETIC DISPLACEMENT	WORK PRESSURE	WEIGHT
A23D035	90	4.8	1400	68	794	8	90



A23E005 550 Oil Free Air Pump

- 50Hz: 45l/min @ 7bar 100 l/min @ 0bar
- 60Hz: 50l/min @ 7bar 108 l/min @ 0bar
- Power: 560w
- Inlet port: G1/4"
- Speed: 1410 rpm
- Max pressure: 8 bar
- Thermal protector: 135±5°C
- Net Weight: 9 kg



A23E006 750 Oil Free Air Pump

- 50Hz: 70l/min @ 7bar 120 l/min @ 0bar
- 60Hz: 77l/min @ 7bar 128 l/min @ 0bar
- Power: 760w
- Inlet port: G1/4"
- Speed: 1410 rpm
- Max pressure: 8 bar
- Thermal protector: 135±5°C
- Net Weight: 11 kg



A23E105 H-type Aluminum Pump

- Mufflers with high efficiency intake filters
- 10-1/2" flywheel

MODEL	MOTOR	AIR DELIVERY	MAX PRESSURE	CYLINDER	SPEED	WEIGHT	PACKING DIMENSION
	KW(HP)	L/min	Bar	MM	R.P.M	KG	MM
A23E105	2.2(3)	114	8	ø80x2	1100	7.5	260x180x250



A23E109 H-type Aluminum Pump

- Mufflers with high efficiency intake filters
- 10-1/2" flywheel

MODEL	MOTOR	AIR DELIVERY	MAX PRESSURE	CYLINDER	SPEED	WEIGHT	PACKING DIMENSION
	KW(HP)	L/min	Bar	MM	R.P.M	KG	MM
A23E109	3.4(4)	135	12	ø80x1.6x5x1	900	9.0	450x340x410



A23E113 H-type Iron Pump

- Mufflers with high efficiency intake filters
- 10-1/2" flywheel

MODEL	MOTOR	AIR DELIVERY	MAX PRESSURE	CYLINDER	SPEED	WEIGHT	PACKING DIMENSION
	KW(HP)	L/min	Bar	MM	R.P.M	KG	MM
A23E113	2.2(3)	114	8	ø80x2	900	7.5	260x180x250



A23E205 D-type Iron Pump

- Mufflers with high efficiency intake filters
- 10-1/2" flywheel

MODEL	MOTOR	AIR DELIVERY	MAX PRESSURE	CYLINDER	SPEED	WEIGHT	PACKING DIMENSION
	KW(HP)	L/min	Bar	MM	R.P.M	KG	MM
A23E205	4.0(5)	160	8	ø80x2	900	7.5	260x180x250



A23E131 1hp Iron Air Compressor Pump

- DimeterxNO.cylinder: Ø51x2mm (2" double cylinder).
- Speed(RPM):1300.
- Capacity(L/min): 36 (1.27cfm).
- Max. pressure: 116 PSI.
- Motor power: 1HP/1.0kw.
- 6" Flywheel.
- 1 Muffler & 1 high efficiency intake filter.
- Oil viewing window and drain plug.



A23E215 D-type Iron Pump

- Mufflers with high efficiency intake filters
- 10-1/2" flywheel

MODEL	MOTOR	AIR DELIVERY	MAX PRESSURE	CYLINDER	SPEED	WEIGHT	PACKING DIMENSION
	KW(HP)	L/min	Bar	MM	R.P.M	KG	MM
A23E215	5.5(7)	998	8	ø80x3	880	48	620x390x410



A23E305
Ya-type Iron Pump

- Mufflers with high efficiency intake filters
- 10-1/2" flywheel

MODEL	MOTOR KW/HP	AIR DELIVERY L/min	MAX PRESSURE Pa	CYLINDER DIA	SPEED RPM	WEIGHT KG	PACKING DIMENSION
A23E305	2.2/3	150	0	38*42	950	17.5	380*250*140



A23E315
Ya-type Iron Pump

- Mufflers with high efficiency intake filters
- 10-1/2" flywheel

MODEL	MOTOR KW/HP	AIR DELIVERY L/min	MAX PRESSURE Pa	CYLINDER DIA	SPEED RPM	WEIGHT KG	PACKING DIMENSION
A23E315	5.5/7.5	275	0	48*53	950	43	380*320*140



A23X003
15Gallon Air Compressor with air accessory

- Motor:2hp
- Tank:15gal Vertical Tank 120V/60HZ
- Oil Lubrication Model
- Induction Motor
- MAX PRESSURE: 125PSI
- V-0 material for shroud
- Air Delivery: 4.8CFM@40PSI 3.8CFM@90PSI
- Range of Pressure gauge: 0-200PSI
- Safety valve: 140PSI ASME
- Pressure switch: Furnas
- Material of Shroud: PP Anti Fire
- Material of Fan: PP Anti Fire
- Motor wire: Aluminum
- Air filter: Steel
- Air Hose: 3/8"x25ft Hybrid Air Hose
- Air inlet: 1/4"NPT brass fitting
- With black sleeve
- Working PSI:300
- Temperatures:-35°C -- 65°C
- Air ACCESSORY:
- 1pc air blow gun
- 1PC brass coupler
- 1PC brass air chuck
- 1PC 1/4" male plug
- 1PC 1/4" female plug
- 2pc ball needle
- 1PC needle adapter
- 1PC tapered nozzle
- 1PC thread seal tape
- c CSA us Certificated.



A25A101
Paint Spray Gun Washer

- Solvent tank:2.5gallous
- Work air pressure:40psi
- Max air pressure:60psi
- PE air hose size:1/4"



A25B011
5GAL Portable Tank Asme Approved

- Tank: 5GAL
- Max Pressure: 125PSI
- Hose: 3feet
- Y40 pressure gauge: 1pc
- 140psi Safety Valve: 1pc
- Light weight, portable with handle for easy transport.
- On/off air adjustment dial.
- Industrial grade air hose with standard tire air chuck.
- ASME approved.



A25B015
11 Gallon Air Tank

- Capacity: 11 gallons.
- Maximum pressure: 125psi.
- Portable air tanks with easy carrying handles.
- 4 ft. air hose with air chuck included.
- Heavy-gauge steel construction with rust-free baked finish.



A25B035
5GAL Portable Tank

- Tank: 5GAL
- Max Pressure: 125PSI
- Hose: 0.9 M material: PVC
- 40MM Dia. 0-200psi no oil pressure gauge: 1pc
- 140PSI SAFETY VALVE: 1pc 127-140psi start 80psi cease
- Light weight, portable with handle for easy transport.
- On/off air adjustment dial.
- Industrial grade air hose with standard tire air chuck.
- Material :iron
- Surface treatment :powder spraying



A25B055
11GAL Portable Tank

- Tank: 11GAL
- Max pressure: 125PSI
- Hose: 1.2 M Material: PVC
- 40MM Dia. 0-200psi no oil pressure gauge: 1pc
- 140PSI SAFETY VALVE: 1pc 127-140psi start 80psi cease
- Light weight, portable with handle for easy transport.
- On/off air adjustment dial.
- Industrial grade air hose with standard tire air chuck.
- Material :iron
- Surface treatment :powder spraying



A25B036
5GAL Portable Tank Asme Approved

- Tank: 5GAL
- Max pressure: 125PSI
- Hose: 0.9 M material: PVC
- 40MM Dia. 0-200psi no oil pressure gauge: 1pc
- 140PSI SAFETY VALVE: 1pc 127-140psi start 80psi cease
- Light weight, portable with handle for easy transport.
- On/off air adjustment dial.
- Industrial grade air hose with standard tire air chuck.
- Material :iron
- Surface treatment :powder spraying
- ASME approved



A25B056
11GAL Portable Tank ASME Approved

- Tank: 11GAL
- Max pressure: 125PSI
- Hose: 1.2 M Material: PVC
- 40MM Dia. 0-200psi no oil pressure gauge: 1pc
- 140psi Safety Valve: 1pc 127-140psi start 80psi cease
- Light weight, portable with handle for easy transport.
- On/off air adjustment dial.
- Industrial grade air hose with standard tire air chuck.
- Material :iron
- Surface treatment :powder spraying
- Asme Approved



A25B045
7GAL Portable Tank

- Tank: 7GAL
- Max pressure: 125PSI
- Hose: 1.2 M material: PVC
- 40MM Dia. 0-200psi no oil pressure gauge: 1pc
- 140psi safety valve: 1pc 127-140psi start 80psi cease
- Light weight, portable with handle for easy transport.
- On/off air adjustment dial.
- Industrial grade air hose with standard tire air chuck.
- Material :iron
- Surface treatment :powder spraying



A25B046
7GAL Portable Tank

- Tank: 7GAL
- Max pressure: 125PSI
- Hose: 1.2 M Material: PVC
- 40MM Dia. 0-200psi no oil pressure gauge: 1pc
- 140PSI SAFETY VALVE: 1pc 127-140psi start 80psi cease
- Light weight, portable with handle for easy transport.
- On/off air adjustment dial.
- Industrial grade air hose with standard tire air chuck.
- Material :iron
- Surface treatment :powder spraying
- ASME approved



A25B925
Air Tank Repair Kit

- Air Tank Gauge easy to read two color gauge. 0 to 200 PSI
- Air Tank Manifold made of heavy duty construction
- 4' Air Hose with Tire Chuck with 1/4" female NPT tire chuck



A95X005 19PC. Air Tool Kit

- 1pc-3/8" air ratchet wrench
- 2pcs-150mm air hammer
- 8pcs-impact sockets 11mm 12mm 13mm 17mm 1/2" 9/16" 5/8" 3/4"
- 1pc-3/8" to 1/2" adaptor
- 1pc-spring retainer
- 4pcs-chisels
- 1pc-nippler
- 1pc-blow case
- PER CTN:4set
- Package:Color sleeve
- Size of CTN:28.5X27X39.5cm



A95X007 19PCS Air Tool Kit

- 1pc 1/2 " Air Impact Wrench
- 1pc 3/8 " Air Ratchet
- 10pcs 1/2 " Impact sockets(1/2 " , 9/16 " ,5/8 " ,11/16 " , 10mm,12mm, 15mm,17mm,19mm,and 21mm)
- 1pc 3/4 " and 13/16 " SAE ip socket
- 1pc 3/8 " (F)to 1/2 " (M) socket adapter
- 1pc3 " Extension bar
- 2pcs 1/4 " Male plugs
- 1pc oil pot
- 1pc Carrying blow mold case
- CE,GS Certi cation



A95X009 17PC. Air Tool Kit

- 1pc-1/2" Air Impact Wrench
- 1pc-1/2" Air Ratchet Wrench
- 10pcs-1/2" dr. Sockets:9,10, 11,13,14,17,19,22,24,27mm
- 1pc-4mm Hex Key
- 1pc-oil Pot
- 1pc-mini Oiler
- 1pc-nipple
- 1pc-blow Mold Case
- PER CTN:4SETS
- Package:Color Sleeve
- Size of CTN:50x33.5x20.5cm
- G.W./N.W.:27/25Kgs



A95X011 17pcs Air Tool Kit (Composite Housing)

- Including:
- 1PC 1/2" Air Impact Wrench
- Free Speed 7500 RPM @ 90 PSI +/- 10%
- Torque: 250 FT-LBS @ 90 PSI +/- 10%
- 1PC 3/8" Ratchet Wrench
- Free Speed 170 Rpm @ 90 PSI +/-10%
- TORQUE 66 FT-LBS
- 1PC 4mm Hex Allen Wrench
- 1PC AIR TOOL OIL
- 1PC OILER
- 10PCS Impact Socket In Black Finish, Sizes: 1/2", 9/16", 5/8", 11/16", 3/4", 11MM, 12MM, 13MM, 14MM, 17MM
- 1PC 3/8" To 1/2" Adaptor Cr-v
- 1PC Blow Mold Case.



A95X013 25PC. Air Tool Kit

- 11pc-1/2" air impact wrench
- 1pc-150mm air hammer
- 1pc-Spring retainer
- 1pc-Female quick coupler
- 1pc-4mm hex key wrench
- 10pcs-1/2" impact sockets: 11,12,13,14,17,19,21,22,23,24mm
- 5pcs-Male quick nipple
- 1pc-oil pot
- 3pc-120mm chisels
- 1pc-Blow mold case
- PER CTN:5sets
- Package:color sleeve
- Size of CTN:49.5X43X26cm



A95X017 35PC. Air Tool Kit

- 1pc-6mm or 1/4" air die grinder
- 2pcs-Hand wrenches
- 1pc-1/2" air impact wrench
- 3pcs-120mm chisels
- 1pc-1/2" or 3/8" air ratchet wrench
- 1pc-Spring retainer
- 1pc-150mm air hammer
- 5pcs-Nippler
- 1pc-4mm hex key wrench
- 1pc-1/2"dr.extension Bar 3"
- 1pc-3/8"to 1/2" adaptor
- 1pc-Oil pot
- 1pc-Female coupler
- 3pcs-6mm(1/4")mounted grinding stones
- 10pcs DR.Impact socket(1/2",9/16",5/8", 11/16",3/4",11,12,13,14,17mm)
- 1pc-blow mold case per CTN:2SETS
- Package:Color Sleeve
- Size of CTN:36X33.5X23.5cm
- G/N.W.:18/16kgs



A95X019 27pcs Air Tool Kit

- 1pc-air blow gun
- 1pc-air in ating gun
- 1pc-1/2" impact wrench
- 1pc-1/4" air die grinder
- 1pc-5M*5mm*8mm air hose
- 1pc-collet
- 5pcs-6mm(1/4") mounted grinding stones
- 5pcs-3mm(1/8") mounted grinding stones
- 3pcs-sockets: 14mm,17mm,19mm.
- 1pc-quick coupler
- 4pcs- quick nipple
- 2pcs-spanner
- 1pc-blow mold case



A95X055 50PC. Air Tool Kit

- 1pc-3/8" air ratchet wrench
- 1pc-Tire gauge
- 1pc-150mm air hammer
- 1pc-3/8"to1/2"adaptor
- 1pc-Air blow gun
- 1pc-Female nipple
- 1pc-Spring retainer
- 5pcs-Male nipple
- 1pc-75mm(3")extension bar
- 1pc-Female coupler
- 1pc-Bit holder
- 3pcs-120mm chisels
- 1pc-4mm hex key wrench
- 1pc-Mini oiler
- 1pc-Sport needle adaptor
- 1pc-Te on tape
- 1pc-Safety nozzle
- 1pc-Swove: hose connector
- 1pc-Air in ating needle
- 1pc-Oil pot
- 1pc-High pressure needle
- 1pc-Rubber nozzle
- 1pc-Tapered nozzle
- 6pc-Hex drive bits (L4,L5.5,T-10,PH2,PH3)
- 1pc-Both ends with male thread hose connector
- 1pc-Female thread hose connector
- 10pcs-Sockets(1/2" to 3/4" and 11,12,13,14,17mm)
- 1pc-Blow mold case 2sets/Caton
- Package:Color Sleeve Size of ctn:41x35.5x23.5cm
- G./N.W.:19/17kgs



A95X021 37pc. Air Tool Kit

- 4pcs-120mm round shank chisels
- 1pc-air chuck for tire
- 1pc-tire gauge 1pc-tapered nozzle
- 4pcs-male plug 1pc-spring retainer
- 1pc-Cleaning brush
- 1pc-female quick coupler
- 1pc-blow gun 1pc-Mini blow gun
- 1pc-extension tube for cleaning
- 1pc-Mini oiler
- 1pc-in ating needle adaptor
- 1pc-1/2" air ratchet wrench
- 1pc-hose end adaptor
- 1pc-1/2" air impact wrench
- 1pc-Tapered nozzle
- 1pc-150mm air hammer
- 1pc-venturi attachment for blowing
- 1pc-4mm hex key wrench
- 1pc-in ating needle 1pc-1/2" dr 125mm extension bar
- 10pcs-1/2"dr sockets:9,10,11,13,14, 17,19,22,24,27mm
- 1pc- blow mold case PER CTN:2sets
- Package:Color sleeve
- Size of CTN:37.5X33.5X26cm



A95X025 50PCS Air Tool Kit

- 1pc-1/2" dr.impact wrench
- 1pc-1/4" die grinder
- 1pc-3/8" reversible drill
- 1pc-150mm Hammer, round
- 1pc-150mm Dualaction Sander
- 10pcs-1/2" dr.socket:9,10,11,13,14,17, 19,22,24,27mm
- 1pc-1/2" dr.extension bar 125mm
- 1pc-4mm hex key wrinch
- 2pcs-hand wrenches
- 1pc-1/8" collet
- 5pcs-1/4"grinding stone
- 5pcs-1/8"grinding stone
- 2pcs-phillips drill bit:no.2,3
- 2pcs-slotted drill bit:no.4,6
- 1pc-chuck key 1pc-spring retainer
- 4pcs-round shank chisel 120mm
- 1pc-sanding pad
- 2pcs-sanding paper
- 1pc-oil pot 1pc-blow case



A95X059 52PC. Air Tool Kit

- 1pc-1/2" Air Impact Wrench
- 1pc-1/4"WFG-1210 Air Die Grinder
- 1pc-Blow Gun 1pc-Tire Chuck
- 1pc-Tire Gauge 1pc-1/8"Collet
- 1pc-1/2" 75mm(3")extension bar
- 1pc-4mm hex key wrench
- 5pcs-3/4"Sanding Roll
- 5pcs-1"Sanding Roll
- 2pcs-Sanding Drums(3/4"&1")
- 4pcs-Sockets(1/2", 9/16", 5/8", 3/4")
- 1pc-Female coupler
- 2pcs-Female nipple
- 2pcs-male nipple 1pc-Oil pot
- 1pc-In ating needle 1pc-Tapered nozzle
- 1pc-High pressure nozzle
- 1pc-Sport needle adaptor
- 1pc-rubber nozzle
- 1pc-Sately nozzle
- 1pc-Te on tape
- 1pc-Female thread hose connector
- 5pcs-6mm(1/4")mounted grinding stones
- 5pcs-3mm(1/8")mounted grinding stones
- 1pc-Both ends with male thread hose connector
- 1pc-Blow mold case
- PER CTN:3sets Package: Color Sleeve
- Size of CTN:36.5X31X30.5cm
- G./N.W.:20/18kgs



A95X061 57PC. Air Tool Kit

- 1pc-3/8" Ratchet wrench
- 1pc-150mm Air hammer
- 1pc-1/4" Air die grinder
- 1pc-1/2" Air impact wrench
- 1pc-6"Dual action air sander
- 1pc-Female nipple
- 1pc-Spring retainer
- 1pc-4mm Hex key wrench
- 1pc-1/8" collet 1pc-Female coupler
- 1pc-Air blow gun 1pc-in ating needle
- 1pc-Tapered nozzle 1pc-Hose clamp
- 1pc-Rubber nozzle 1pc-High pressure nozzle
- 1pc-Te on tape 1pc-Safety nozzle
- 2pcs-Hand wrenches 1pc-Oil pot
- 3pcs-120mm chisels 6pcs-Male thread nipple
- 1pc-3/8"to1/2"socket adaptor
- 6pcs-Sanding paper
- 1pc-6"Sanding pad
- 1pc-1/2"dr 75mm(3")extension bar
- 5pcs-6mm(1/4")mounted grinding stones
- 5pcs-3mm(1/8")mounted grinding stones
- 7pcs-impact sockets:10,11,13,14,17,19,22mm
- 1pc-Blow mold case 3sets/carton
- Package:Color Sleeve



A95X063 72PCS Air Tool Kit

- 1pc-1/2" air impact wrench.
- 1pc-150mm air hammer.
- 1pc-1/4" air dir grinder.
- 1pc-3/8" air ratchet wrench.
- 1pc-oil pot. • 1pc-3/8" to 1/2" adaptor.
- 8pcs-1/2" dr.cr.mo sockets:1/2",9/16",5/8",3/4",11mm,12mm,13mm,17mm.
- 1pc-1/8" collet. • 1pc-QC coupler.
- 1pc-bits holder. • 1pc-5/32" hex key.
- 1pc-spring retainer. • 1pc-te on tape.
- 1pc-female QC plug.
- 3pcs-120mm chisels (at,punch,edging chisel).
- 1pc- blow gun. • 1pc-tire chuck.
- 1pc-hose and adaptor(brass).
- 1pc-taper nozzle. • 5pcs-male nippler.
- 5pcs-1/4" mounted grinding stone.
- 5pcs-1/8" mounted grinding stone.
- CE,GS Certi cation.



A95X811 Complete Airbrush Kit + Compressor With Tank

- Quiet, low noise. Oil-less.High pressure
- Automatic stop system keep your work conveniently and smoothly.
- It prolong the compressor life as well.
- Airbrush Kits Speci cation:
- NO.1 double action airbrush: Fluid nozzle: 0.3MM
- Working pressure: 15-30 psi
- Capacity of cup: 7 c.c.
- Adjusting spanner, Pipette, Barbed hose connector
- NO.2 double action airbrush: Body Length 150MM
- Nozzle Diameter: 0.35MM
- Metal Cup: 5cc
- Control: push button
- Glass Jars: 22cc 1 X Spanner
- Certi cate: CE,ROSH,GS Please choose the right AIR BRUSH for your easy work.
- Connection: 1/8" BSP/NPT Electric Cable: 1.9M With detailed operation manual



A95X065 80PC Air Tool Kit

- 1pc 1/2 inch drive impact wrench;
- 1pc 3/8 inch drive ratchet wrench.
- 1pc 1/4 inch die grinder;1pc 150mm air hammer;3pc chisels.
- 1pc spring retainer;1pc cut o tool ; 1pc 3 inch cutting wheel.
- 1pc 5mm hex wrench;2pc spanner; 1pc 3 inch extension bar.
- 8pc impact sockets (3/8 inch,7/16 inch, 1/2 inch,9/16 inch, 5/8 inch).
- 11/16" inch, 3/4 inch, 7/8 inch); 1pc 3/8 inch to 1/2 inch adaptor.
- 1pc 1/4inch hex bit holder ; 10pc assorted grinding stones.
- 19pc assorted bits: Torx: T10, T15, T20, T25, T30.
- Hex: 1/8 inch, 5/32 inch, 3/16 inch, 7/32 inch, 1/4 inch.
- Phillips: #1, #2, #3 Slotted: 4, 5.5, 7Square: #1, #2, #3.
- 1pc 1inch sanding drum; 1pc 3/4inch sanding drum.
- 1pc air duster with 3inch extension nozzle with 1/4inch female nipple.
- 1pc 4mm hex wrench;2pc sanding drum sleeves.
- 2pc sport needle;1pc needle adaptor; 1pc air mini oiler.
- 1pc female quick coupler;1pc 1/4"to 1/4" NPT female hose connector.
- 1pc tyre in ator/de ator/pressure gauge with 1/4" NPT male nipple.
- 2pc ap wheels (25 x 25; 30 x 25); 1pc oil pot.
- 1pc blow moulded carry/storage case.



A97A005 4" Air Blow Gun

- 4"



A97A007 4" Angled Blow Gun - Aluminium Tube

- Replaceable rubber tips eliminate surface damage
- Comfortable lever control and insulated handle
- Ergonomic grip
- High-impact plastic body with built-in hanger slot
- Angled nozzle easily gets into tight places
- Brass air inlet
- Air Inlet Thread: 1/4" NPT
- Air Pressure: 90-120 psi
- Aluminium Tube



A97A008 4" Angled Blow Gun - Steel Tube

- Replaceable rubber tips eliminate surface damage
- Comfortable lever control and insulated handle
- Ergonomic grip
- High-impact plastic body with built-in hanger slot
- Angled nozzle easily gets into tight places
- Brass air inlet
- Air Inlet Thread: 1/4" NPT
- Air Pressure: 90-120 psi
- Steel nozzle with rubber tip
- Chrome plated steel tube.



A97A009 13" Air Blow Gun

- 13"



A97A011 13" Angled Nozzle Blow Gun - Aluminium Tube

- Replaceable rubber tips eliminate surface damage
- Comfortable lever control and insulated handle
- Ergonomic grip
- High-impact plastic body with built-in hanger slot
- Angled nozzle easily gets into tight places
- Brass air inlet
- Air Inlet Thread: 1/4" NPT
- Air Pressure: 90-120 psi
- Aluminium Tube



A97A012 13" Angled Nozzle Blow Gun - Steel Tube

- 13" Angled Nozzle
- Comfortable lever control and insulated handle
- Ergonomic grip
- High-impact plastic body with built-in hanger slot
- Angled nozzle easily gets into tight places
- Brass air inlet
- Air Inlet Thread: 1/4" NPT
- Air Pressure: 90-120 psi
- Steel nozzle with rubber tip
- Chrome plated steel tube.



A97A013 20" Air Blow Gun

- 20"



A97A016 20" Angled Nozzle Blow Gun

- 20" Angled Nozzle
- Comfortable lever control and insulated handle
- Ergonomic grip
- High-impact plastic body with built-in hanger slot
- Angled nozzle easily gets into tight places
- Brass air inlet
- Air Inlet Thread: 1/4" NPT
- Air Pressure: 90-120 psi
- Steel nozzle with rubber tip
- Chrome plated steel tube.



A97A019 24" Air Blow Gun

- 24"



A97A015 20" Angled Nozzle Blow Gun - Aluminium Tube

- Replaceable rubber tips eliminate surface damage
- 20" Angled Nozzle
- Comfortable lever control and insulated handle
- Ergonomic grip
- High-impact plastic body with built-in hanger slot
- Angled nozzle easily gets into tight places
- Brass air inlet
- Air Inlet Thread: 1/4" NPT
- Air Pressure: 90-120 psi
- Aluminium Tube



A97A023 4" Air Blow Gun

- 4"



A97A024 24" Air Blow Gun

- Comfortable lever control and insulated handle
- Ergonomic grip
- Brass air inlet
- Air Inlet Thread: 1/4" NPT
- Air Pressure: 90-120 psi
- Material:POM plastic body ,Steel tube.



A97A027
13" Air Blow Gun

- 13"



A97A053
Air Blow Gun with High Pressure Tip

- Item No.: A97A053



A97A121
Air Blow Gun

- The material: Pom
- Air Inlet:1/4"
- Max Air Pressure:232psi
- Maximum operating temperature: +60°C/140°F
- Min:-20°C/-4°F
- Air Consumption: 25 scfm



A97A131
Air Blow Gun

- The material: Pom
- Air Inlet:1/4"
- Max Air Pressure:232psi
- Maximum operating temperature: +60°C/140°F
- Min:-
- Air Co



A97A031
20" Air Blow Gun

- 20"



A97A055
Air Blow Gun

- Blower Anti dust recoil Tire in ator



A97A123
Air blow gun with 3 way-air nozzle

- Palstic body,di erent color is available
- With 3-way aluminum nozzle
- Air inlet: G1/4
- Material:POM



A97A133
Air Blow Gun

- The material: Pom
- Air Inlet:1/4"
- Max air pressure:232psi
- Maximum operating temperature: +60°C/140°F
- Min:-20°C/-4°F
- Air co



A97A051
Air Blow Gun

- Item No.: A97A051



A97A057
Air Blow Gun with Rubber Tip

- Air ow adjustable



A97A125
4" Air Blow Gun

- The material: Pom
- Air Inlet:1/4"
- Max Air Pressure:232psi
- Maximum operating temperature: +60°C/140°F
- Min:-20°C/-4°F
- Air Consumption: 25 scfm



A97A135
Air Blow Gun

- The material: Pom
- Air Inlet:1/4"
- Max Air Pressure:232psi
- Maximum operating temperature: +60°C/140°F
- Min:-20°C/-4°F
- Air Co



A97A139
Telescopic Air Blow Gun

- The material: Pom
- Air Inlet:1/4"
- Working pressure:90psi 6.3kg/cm2
- Max Air Pressure:232psi
- Maximum operating temperature: +60°C/140°F
- Min:-20°C/-4°F
- Air Consumption: 25 scfm
- POM body steel extention tube with rubber nozzle
- Length:22-33cm(Telescopic)



A97A171
Zinc Air Blow Gun

- Item No.: A97A171



A97A183
Turbo Nozzle Air Duster Gun

- Turbo nozzle (up to 3 times more powerful)
- Fitted with 1/4" M-Type plug
- Aluminum body by zinc alloy,Chrome plated
- Handle is rubber coating
- Working pressure: 80PSI.



A97A151
Air Blow Gun With Turbo Nozzle

- Venturi Tip Boosts Air Flow 4 times, reducing Air Consumption.
- 1/4" NPT air inlet thread. Working Pressure 90-120 PSI.
- Max Pressure 220 PSI.
- Air consumption 4 CFM at 90 PSI.
- Sound Level 90-92 db at 90 PSI.
- POM Construction.



A97A173
13" Air Blow Gun

- Air Inlet Thread: 1/4" NPT
- Air Pressure: 90-120 psi
- Material:Zinc body ,Aluminum tube with rubber tip.



A97A185
Turbo Nozzle Air Duster Gun

- Turbo nozzle (up to 3 times more powerful)
- Fitted with 1/4" M-Type plug
- Aluminum body by Nickel-plated
- Working pressure: 90PSI.



A97A153
4" Straight Air Blow Gun

- Effective length of gun nozzle: 4" A3# carbon steel
- 1/4" BSP air inlet thread.
- Max pressure: 220 PSI.
- Air consumption: 4 CFM@90 PSI.
- Sound level: 90-92 db@90 PSI.
- Shell material: POM
- Working pressure: 90-120 PSI.



A97A181
Adjustable Air Duster 90-114psi

- Mainly usded to clean dust when worker installing, xing, the best t to clean wherewe can't touch but narrow, aloft place and some of air tubes.
- There is a gate on the end of air gun can adjust the air strength.
- Please use the barometric pressure at 90psi - 114psi range.
- Material:Zinc-alloy.
- With two nozzle :115mm and 17mm.
- 1/4 M type tting.



A97A187
High Flow Blowing Gun

- Air Blow Gun
- Air Inlet:1/4"
- Air hose:3/8"
- Max Air Pressure:232psi



A97A205
Pocket Blow Gun-German Type

- German Type



A97A214
Pocket Blow Gun-Milton Type

- Milton Type



A97A401
12in. Rubber Tip Air Blow Gun

- 12in. Venturi Tip Air Blow Gun is perfect for cleaning or damaging build-ups of dirt and grime from large machinery, engines and heavy equipment.
- Features a heavy-duty angled aluminum body with rubber tip and thumb trigger.
- 1/4in. NPT inlet connects quickly and easily to air hose couplings.



A97A407
48in. Rubber Tip Air Blow Gun

- The Grip 48in. Venturi Tip Air Blow Gun is perfect for cleaning or damaging build-ups of dirt and grime from large machinery, engines and heavy equipment.
- Features a heavy-duty angled aluminum body with rubber tip and thumb trigger.



A97A208
Pocket Blow Gun-Tru ate Type

- Item No.: A97A208
- Tru ate Type



A97A215
Pocket Blow Gun-Milton Type (Brass)

- Milton Type(Brass)



A97A403
24in. Rubber Tip Air Blow Gun

- 24in. Venturi Tip Air Blow Gun is perfect for cleaning or damaging build-ups of dirt and grime from large machinery, engines and heavy equipment.
- Features a heavy-duty angled aluminum body with rubber tip and thumb trigger.
- 1/4in. NPT inlet connects quickly and easily to air hose couplings.



A97A911
Air Wonder Gun Kit

- Aluminum Gun, 30 inch PVC Hose
- Dust Bag : 1 pc
- Round Nozzle : 1 pc
- Flat Nozzle : 1 pc
- Tiny Nozzle : 1 pc
- 1/4" air inlet
- Working Pressure : 90 psi



A97A211
Pocket Blow Gun-Japan Type

- Item No.: A97A211
- Japan Type



A97A217
Pocket Blow Gun-Aro Type

- Aro Type



A97A405
36in. Rubber Tip Air Blow Gun

- 36in. Venturi Tip Air Blow Gun is perfect for cleaning or damaging build-ups of dirt and grime from large machinery, engines and heavy equipment.
- Features a heavy-duty angled aluminum body with rubber tip and thumb trigger.
- 1/4in. NPT inlet connects quickly and easily to air hose couplings.



A97B005
3-way Quick Coupling Manifold

- Item No.: A97B005



A97B105
Female Brass Coupler

- Female Brass Coupler.
- Industrial type(Milton type).
- 1/4"NPT-18 inlet.



A97B185
1/4" ID Universal Hose Coupler

- 1/4" ID Universal Hose Coupler.
- Fits industrial (Milton), automotive (Tru ate) and aro type fittings.
- One touch design for quick engage and release.
- Brass construction.
- 1/4" I.D. hose barb.



A97C101
Pistol Grip Tire In ator W/ Gauge

- Chuck gives easy access to inside dual wheels.
- Lever in ation trigger at gauge with button valve to bleed o excess tire pressure.
- Rubber protected tire gauge.
- 15" Air hose.



A97B181
1/4" NPT Female Universal Coupler

- 1/4" NPT (F) Universal Coupler.
- Fits industrial (Milton), automotive (Tru ate) and aro type fittings.
- One touch design for quick engage and release.
- Brass construction.
- 1/4" Female NPT.



A97C003
Dual Chuck Tire In ator

- 120PSI inline tire gauge.
- Solid brass Fittings with O-ring seals.
- 6" chrome-plated steel dual chuck.



A97C103
Dual Chuck Tire In ator W/ Dial. Gauge

- Rubberized 2" gauge shows pressure from 10 PSI to 220 PSI for accurate in ation.
- Lever easily controls in ation and bleed-valve reduces excess pressure.
- Scales: PSI, kg/cm², kPa and bar.
- 1/4"-18 NPT air inlet.



A97B183
3/8" NPT Female Universal Coupler

- 3/8" NPT (F) Universal Coupler.
- Fits industrial (Milton), automotive (Tru ate) and aro type fittings.
- One touch design for quick engage and release.
- Brass construction.
- 3/8" Female NPT.



A97C051
Professional Air Line Gauge

- Manufactured to comply with EC directive 86/217.
- Extruded aluminium body with large rubber bumper.
- Linear pressure scale dual calibrated in psi and bar.
- 500 mm rubber hose with steel protection sleeve.
- Fitted with twin, push-on aio connectors. Supplied with a serial numbered calibration certificate.
- Range: 0-9.5 bar (0-140 psi).
- Air supply min: 6.9 bar (100psi).
- Air supply max: 13.8 bar (200psi).
- Inlet: 1/4" bsp female



A97C105
Tire in ating gun with gauge

- Chuck gives easy access to inside dual wheels
- Lever in ation trigger at gauge with button valve to bleed o excess pressure
- Rated pressure: 150PSI
- Max. pressure: 220PSI
- Minimum Pressure (PSI) 10 PSI
- 15" hose
- Scales: PSI, kg/cm², kPa and bar
- Air inlet size G1/4



A97C107 Tire Inflation Gun

- Industrial air inflation gun, new design, attractive appearance.
- Simple operation, comfortable feeling.
- Working pressure: 0-8 BAR
- Pressure gauge range: 0-12 BAR / 0-170psi
- 32" hose with tire chuck
- Air inlet: 1/4" NPT-18



A97C111 Tire Inflation 63mm Gauge

- With air release button, for reducing pressure in over-inflated tires.
- Pressure Range 0-170 Psi, 0-12 Bar, 0-1200 kPa
- Working pressure: 0-8 BAR
- 12" hose with tire chuck
- Air inlet: 1/4" Milton type quick coupler plug.



A97C115 Heavy-duty Tire Inflation W/ Dial Gauge

- Rubberized 2" gauge shows pressure from 10 PSI to 220 PSI for accurate inflation.
- Lever easily controls inflation and bleed valve reduces excess pressure.
- Scales: PSI, kg/cm², kPa and bar.
- 1/4"-18 NPT air inlet.



A97C121 Air Tire Infaltor

- Aluminum Die-cast body.
- 2" Dial type gauge with rubber protector.
- Fitted with single clip-on connector.
- Pressure range: 0-220Psi, 0-15Bar, 0-1500 Kpa.
- Length of rubber hose: 13".
- Air inlet: 1/4"BSP.



A97C133 Tire Inflation 0~160psi 3" (80mm) Gauge

- 3" (80mm) Gauge
- The material: PA
- Thread Size: 1/4"(F)NPT
- Max. Safe Storage Temp.: 122 °F
- Calibration: 0 to 160 psi
- Includes: Dual Chuck, Rubber Hose, Gauge, Inflation Gun Body



A97C201 Digital Tire Inflation

- Robust composite body with backlit LCD digital display.
- Calibrated in bar, psi and kPa, kg/cm²
- Range: 0-200psi (0-14Bar).
- Supplied with 480mm rubber hose and screw on connector.
- Power style: 2pc 1.5V AAA alkaline batteries.
- 1/4" NPT air inlet.



A97C207 Digital Tire Inflation W/dual Head Chuck

- Digital Tire Inflation, 0-255PSI, Large LCD Display, 30" Rubber hose.
- With Dual Head Chuck.
- Plastic body.
- Range of 0-255PSI with 1 psi resolution.
- Measurement: (PSI/BAR/KPA/KG/CM²).
- Boasts a dual head chuck and is accurate to within ±1psi at 100psi and ±2psi at 200psi.
- Backlit monitor is powered by two AAA batteries.
- Air Inlet: 1/4"NPT-18.



A97C217 Calibrated Hand Tyre Filler, Digital

- Calibrated hand tyre filler with digital display
- Makes perfect measurement possible
- Pressure can be measured and set to one-hundredth
- Compared to mechanical tyre fillers on the market which lose their accuracy after a certain time and need to be re-calibrated, this device remains its accuracy
- Filling range: 0 - 12 bar
- Max. filling speed: 910L/mini
- Max. inlet pressure: 15 bar
- Length of filling hose: 1.8m
- Connecting thread: 1/4"
- Battery: Coin cell CR 2450



A97C203 Digital Tire Inflation W/ Double Head Tire Chuck

- Digital display range 0-200 psi, 0-12bar, 0-1200 kpa, 0-12kg/C m².
- Chuck interior diameter 8mm/ 0.31"
- Gun tip exterior diameter 11mm/ 0.43"
- Hose length 34cm/ 13"
- Power style: 2pc 1.5V AAA alkaline batteries.



A97C209 Multi-function Air Gun

- Pressure unit: psi, bar, kpa, kg/cm²
- Pressure range: 3-150psi, 0.20-10.3bar, 20-1000kpa, 0.21-10.546kg/cm²
- Battery: 2*AAA battery (include)
- Back-Lit LCD blue light
- Accuracy: +/-1%+0.5psi
- With valve core tool
- With 1 valve.



A97D005 Mini Air Line Filter

- Item No.: A97D005



A97C205 Digital Tire Inflation

- Robust composite body with backlit LCD digital display.
- Calibrated in bar, psi and kPa, kg/m².
- Range: 0-200psi (0-14Bar).
- Supplied with 480mm rubber hose and screw on connector.
- Power style: 2pc 1.5V AAA alkaline batteries.
- 1/4" NPT air inlet.



A97C211 High-accuracy Digital Pressure Gauge

- Aluminum alloy body
- Chrome-faced
- TPR double colored handle
- PSI, BAR, KPA, Kg/cm²
- Rated pressure: 0-100psi
- Max pressure: 150psi
- Accuracy: ±1 psi
- LCD display
- 1/4 M type fitting
- 50 seconds without operation, the LCD screen automatically shut down



A97D009 Mini Air Line Filter

- Item No.: A97D009



A97C116 Heavy Duty Tire Inflation Gun With Swivel & Rotate Ball Fitting

- Nylon body tire infaltor gun
- 60cm rubber hose with Swivel & Rotate Ball Fitting
- 1-16 Bar / 0-20PSI
- 1/4 brass air inlet



A97C123 Metal Machinery Tire Inflation Gun

- Aluminum alloy body
- Chrome-faced
- TPR double colored handle
- PSI/Kg
- Rated pressure: 0-100psi
- Max pressure: 100psi
- Accuracy: ±1 psi
- Dial display
- 1/4 M type fitting



A97C117 Tire Inflation Gauge

- Calibrated hand tyre filler with Speed mounting support.
- Lightweight, robust and impact-resistant plastic housing.
- The Speed mounting support enables loosening of the valve seat in order to fill the tyre with the unscrewed valve seat.
- Transparent design which makes it easier for the user to see whether.
- The insert is completely loosened in order to achieve maximum flow rate at the valve.
- Saves up to 50% time due to extremely high filling speed and guided valve insert removal.
- No injuries and loss caused by removal of valve inserts are a thing of the past now.
- Ideal for truck and constructional machine tyres.
- Filling range: 0 - 12 bar
- Max. filling speed: 910 l/min.
- Max. inlet pressure: 15 bar
- Length of filling hose: 1.8 m.
- Hose-Ø: 8 mm Connect. thread: 1/4".



A97D011 Air Line Filter

- Item No.: A97D011



A97E007 Air Regulator W/gauge

- Milton Type(Brass)



A97F009 Air Control Unit

- Filter/Regulator+Lubricator



A97F011 1/4" Air Regulator & Air Filter

- Size:1/4
- Use Pressure:0-140psi
- Max.pressure:160psi
- Air inlet &out size: 1/4"NPT



A97D031 Air Regulator & Air Filter

- Size:1/2
- Use Pressure:0-140psi
- Max.pressure:220psi
- Air inlet &out size: 1/2"NPT



A97E111 Inline Air Regulator

- This guarantees constant pressure for the tool. A safety button prevents unintended adjustment of the set output pressure.
- Flexible pressure setting by means of a dial
- Max. output pressure 3 - 9 bar
- Max. input pressure 16 bar
- Zine-alloy body
- 1/4"NPT inlet/outlet.



A97F015 1/4" Air Control Unit

- Size:1/4
- Use Pressure:0-140psi
- Max.pressure:160psi
- Air inlet &out size: 3/8"NPT



A97E005 Air Regulator W/gauge

- Item No.: A97E005



A97F005 Air Regulator & Air Filter

- Size:3/8"
- Use Pressure:0-140psi
- Max.pressure:220psi
- Air inlet &out size: 3/8"NPT



A97F017 Air Filter/regulator

- Item No.: A97F017



A97F021 Air Control Unit(1/4")

- Filter/Regulator +Lubricator
- Size:1/4
- Use Pressure:0-140psi
- Max.pressure:160psi
- Air inlet &out size: 3/8"NPT



A97X051 Air Blow Gun With Hose Set

- Item No.: A97X051



A97X059 2 Pc. Angled Blow Gun Set

- 4" Angled Nozzle Blow Gun 1pc
- 13" Angled Nozzle Blow Gun 1pc
- Comfortable lever control and insulated handle
- Ergonomic grip
- High-impact plastic body with built-in hanger slot
- Angled nozzle easily gets into tight places
- Brass air inlet
- Air Inlet Thread: 1/4" NPT
- Air Pressure: 90-120 psi



A97F031 Air Control Unit(3/8")

- Filter/Regulator +Lubricator



A97X053 Air Blow Gun With Hose Set

- Using the air pressure system found on trucks, this heavy duty gun will quickly clean the cab interior.
- 1PC 4" plastic air blow gun with a coupler plug.
- 1PC T connector with milton quick coupler
- 1PC 1/4"X 20ft PU air hose with milton coupler set.
- Work pressure: 90PSI.



A97X061 5Pc. Air Blow Gun Set

- Item No.: A97X061



A97X043 Air Accessory Kit

- 1pc coupler
- 1pc thread seal tape
- 1pc dual foot chuck
- 1pc ball foot chuck
- 1pc blow gun
- 1pc 50psi gauge
- 1pc safety Nozzle
- 1pc rubber tip
- 1pc tapered in ator
- 2pc in ation needles
- 4pc male plugs 1/4"NPT
- 2pc male couplings
- 1pc female coupling
- 2pc female plugs



A97X062 71PC Air Tool Kit Set

- 71-Pc. Air Tool Kit includes a 3/8 in. ratchet wrench with 8-pc socket set, a 1/2 in. impact wrench, 1/4 in. die grinder, a 150mm air hammer with round chisel set.
- Also includes a 10-pc. 25mm bit set, 10-pc. shank stone set,
- 5-pc. sanding paper set, plus hand wrenches, polish wheel, blow gun, hex key, adapters, nozzles and other accessories, all stored in a blow-molded case.



A97X063 71PC Air Tool Kit Set

- 1 pc air die grinder
- 1 pc 3/8" ratchet wrench
- 1 pc 1/2" impact wrench
- 1 pc 150mm air hammer
- 1 pc mini blow gun
- 1 pc 1/8"(3mm) collet
- 1 pc spring retainer
- 1 pc 4mm hex wrench
- 2 pcs spot needles
- 1 pc hose end adapter
- 1 pc coupler
- 1 pc rubber nozzle
- 1 pc safety nozzle
- 1 pc high pressure nozzle
- 1 pc taper nozzle
- 1 pc ball chuck
- 5 pcs male plugs
- 1 pc female plug
- 1 pc BIT adapter
- 2 pcs hand wrenches
- 8 pcs 1/2" impact sockets: 11、12、13、17mm, 1/2" , 9/16", 5/8", 3/4"
- 1 pc 3/8" to 1/2" adapter
- 9 pcs 25mm bits: PH2、 PH2、 PH3、 T-10、 T-15、 T-20、 3/16"、 3/16"、 1/4"
- 5 pcs 1/8"(3mm) shank grinding stones
- 5 pcs 1/4"(6mm) shank grinding stones
- 1 pc 3/4" sanding drum
- 10 pcs 3/4" sanding drum sleeves
- 3 pcs 120mm chisels: sharp point taper punch, radius cutter, scraper chisel
- 1 pc tape 1 pc air tool oil.



A97X075 20" Pistol-Grip Air Blow Gun with Rubber Tips

- Includes 9/16", 15/16" and 1-3/8" rubber tips.
- Extremely useful when blowing out clogged lines, hoses and pipes.
- OSHA-compliant rubber safety tips provide a good seal.
- Working pressure: 75-120 PSI.
- 1/4" NPT inlet.
- POM body.
- Steel nozzle.
- Brass air inlet.



A97X071 4" Pistol-Grip Air Blow Gun with Rubber Tips

- Includes 9/16", 15/16" and 1-3/8" rubber tips.
- Extremely useful when blowing out clogged lines, hoses and pipes.
- OSHA-compliant rubber safety tips provide a good seal.
- Working pressure: 75-120 PSI.
- 1/4" NPT inlet.
- POM body.
- Steel nozzle.
- Brass air inlet.



A97X077 4" & 13" Pistol-Grip Air Blow Gun Set with Rubber Tips

- Includes 9/16", 15/16" and 1-3/8" rubber tips.
- Extremely useful when blowing out clogged lines, hoses and pipes.
- OSHA-compliant rubber safety tips provide a good seal.
- Working Pressure:75-120 PSI.
- 1/4" NPT inlet.
- POM body.
- Steel nozzle.
- Brass air inlet.



A97X073 13" Pistol-Grip Air Blow Gun with Rubber Tips

- Includes 9/16", 15/16" and 1-3/8" rubber tips.
- Extremely useful when blowing out clogged lines, hoses and pipes.
- OSHA-compliant rubber safety tips provide a good seal.
- Working Pressure: 75-120 PSI
- 1/4" NPT inlet.
- POM body.
- Steel nozzle.
- Brass air inlet.



A97X081 5PC. Multi Blow Gun Kit

- Multi-fuction blow gun (5pcs/set).
- Air gun body 1pc (Aluminum inside& palstic body).
- Tire in ator 1pc.
- Steel ball needle 1pc.
- Adjustable blow tube 1pc.
- 5M AIR HOSE 1PC.
- Working pressure: 90PSI.
- 1/4"air inlet.
- New type air blow gun: 1.Press 2. Push .
- Only 3 Seconds Quick Release.



A97X083 11PC. Multi Blow Gun Kit

- Multi-Fuction blow gun (11pcs/set)
- Air gun body 1pc (Aluminum inside& palstic body)
- Tire in ator 1pcet
- Cleaning gun+hose 1set
- Long blow tube 1pc
- Steel ball needle 1pc
- Plastic ball needle 1pc
- Incremental blow nozzle 1pc
- Blow gun 1pc
- Adjustable blow tube 1pc
- Sand blasting 1pc
- Cleaning gun with cup 1s
- Working pressure: 90PSI.
- 1/4"Air inlet.
- New type air blow gun: 1.Press 2. Push .
- Only 3 Seconds Quick Release.



A97X110 5pc. automotive quick coupler set

- Automotive (Tru ate) type air coupler.
- Made by steel,zinc plating.
- 1 pc 1/4" NPT female quick coupler.
- 1 pc 1/4" NPT female plug.
- 3 pc 1/4" NPT male plug.



A97X085 10PC. Multi Blow Gun Kit

- Multi-fuction blow gun (10pcs/set).
- Air gun body 1pc(Aluminum inside& palstic body).
- Tire in ator 1PC.
- Long blow tube 1PC.
- Steel ball needle 1PC.
- Plastic ball needle 1PC.
- Blow gun 1PC.
- Incremental blow nozzle 1PC.
- Adjustable blow tube 1PC.
- Sand blasting 1PC.
- 5m air hose 1PC.
- Working pressure: 90PSI.
- 1/4"air inlet.
- New type air blow gun: 1.Press 2. Push .
- Only 3 Seconds Quick Release.



A97X106 5pc. Industrial Quick Coupler Set

- Professional high quality heavy duty steel couplers,zinc plated.
- Use with all air operated equipment.
- 1 pc 1/4" NPT female quick coupler.
- 1 pc 1/4" NPT plug.
- 2 pc 1/4" NPT male plugs.
- 1 pc 1/4" NPT adaptor.



A97X105 5pc Industrial Quick Coupler Set

- Professional High Quality Heavy Duty Brass Couplers.
- Use with All Air Operated Equipment.
- 1 pc 1/4" NPT Female Quick Coupler.
- 1 pc 1/4" NPT Female Plug.
- 3 pc 1/4" NPT Male Plug.



A97X109 5pc Automotive Quick Coupler Set

- Professional high quality heavy duty brass couplers.
- Use with all air operated equipment.
- 1 pc 1/4" NPT female quick coupler.
- 1 pc 1/4" NPT plug.
- 2 pc 1/4" NPT male plugs.
- 1 pc 1/4" NPT adaptor.



A97X121 4pc. 3/8" Automotive Quick Coupler Set

- Automotive (Tru ate) type air coupler.
- Steel Construction.
- Zinc Plated.
- Set Includes: 1pc 1/4" NPT female.
- 3/8" quick coupler, 2pc 1/4" NPT male.
- 3/8" plug, 1pc 3/8" NPT male, 3/8" plug.



