



# HYDRAULIC TOOLS CATALOG 2017 SPRING



**Flavic Tools & Equipment Inc.**

Add: 6F No.2 Building,  
351 Changhe Road  
BinJiang Area  
Hangzhou 310052 P.R.China

T: (86)571-8577 1352  
F: (86)571-8577 1353  
[www.flavictools.com](http://www.flavictools.com)

**W**elcome to Flavic Tools & Equipment INC. We are providing worldwide with the broadest selection of Hand Tools, Power Tools, Air Tools and everything related to Tools and Equipment. As one of the leading companies in China of sourcing, developing, manufacturing, and packing, we have the confidence to fit your needs no matter what you want about tools and equipment.

Since we've founded, we are doing our best to provide our customers with the lowest possible prices, friendly and extremely knowledgeable customer service, and a very diverse kind of products.

**CHAMPION** brand has been used since 2003. And we have achieved great success with this brand in the past years.

Aiming at providing customers with a basket of high quality tools, we have developed a top quality level of products under our new brand, **FLAVIC** which combines the **FLAV** emanates

from Yellow in Latin and **VIC** emanates from Conquer, symbolizes our confidence to achieve the best Tools and Equipment trading company in China.

Our company is located in Top Sun Science and Technology Park, in the beautiful City Hangzhou with our own warehouse, where thousands of products are on display. For guaranteeing the quality of our products, we setup a factory for professionally testing, assembling, and packing.

President, Guo'An

*Guo'An*

E: guoan@flavictools.com  
M: (86)139-5802-0160

**Flavic Tools & Equipment Inc.**

Add: 6F No.2 Building,  
351 Changhe Road  
BinJiang Area  
Hangzhou 310052 P.R.China

T: (86)571-8577 1352  
F: (86)571-8577 1353  
www.flavictools.com



Jacks	Page 1-13
Transmission Jacks	Page 13-15
Engine Stands	Page 15
Engine Cradles	Page 15
Engine Cranes.Load Levelers	Page 15-17
Engine Support Bars	Page 17
Jack Stands	Page 17-18
High Position Stands	Page 18
Shop Presses	Page 18-20
Dollies	Page 20-21
Clutch Handlers	Page 21
Spring Compressors	Page 21-22
Motorcycle / ATV Lifts	Page 22-23
Lift Equipments	Page 23-24
Other Hydraulics	Page 24-25
Pipe Benders	Page 26
Hydraulic Tools	Page 26-28
Kits & Sets	Page 28
Accessories	Page 28

### D01A003 2Ton Hydraulic Bottle Jack

- Capacity: 2Ton
- Minimum height: 148mm
- Lifting height: 80mm
- Adjust height: 50mm
- Maximum height: 278mm
- N.W.(kg): 2.3



### D01A005 3Ton Hydraulic Bottle Jack

- Capacity: 3Ton
- Minimum height: 165mm
- Lifting height: 95mm
- Adjust height: 50mm
- Maximum height: 310mm
- N.W.(kg): 3



### D01A007 5Ton Hydraulic Bottle Jack

- Capacity: 5Ton
- Minimum height: 177mm
- Lifting height: 105mm
- Adjust height: 60mm
- Maximum height: 342mm
- N.W.(kg): 4



### D01A021 32Ton Hydraulic Bottle Jack

- Capacity: 32Ton
- Minimum height: 243mm
- Lifting height: 148mm
- Adjust height: -
- Maximum height: 391mm
- N.W.(kg): 14.5



### D01A027 50Ton Hydraulic Bottle Jack

- Capacity: 50Ton
- Minimum height: 265mm
- Lifting height: 180mm
- Adjust height: -
- Maximum height: 445mm
- N.W.(kg): 21



### D01A069 100Ton Hydraulic Bottle Jack

- Capacity: 100Ton
- Minimum height: 340mm
- Lifting height: 180mm
- Adjust height: -
- Maximum height: 520mm
- N.W.(kg): 75



### D01A009 8Ton Hydraulic Bottle Jack

- Capacity: 8Ton
- Minimum height: 185mm
- Lifting height: 105mm
- Adjust height: 60mm
- Maximum height: 350mm
- N.W.(kg): 5



### D01A011 10Ton Hydraulic Bottle Jack

- Capacity: 10Ton
- Minimum height: 195mm
- Lifting height: 115mm
- Adjust height: 60mm
- Maximum height: 370mm
- N.W.(kg): 5.5



### D01A013 12Ton Hydraulic Bottle Jack

- Capacity: 12Ton
- Minimum height: 204mm
- Lifting height: 115mm
- Adjust height: 60mm
- Maximum height: 379mm
- N.W.(kg): 6.7



### D01A083 2Ton Hydraulic Double Ram Bottle Jack

- Capacity: 2Ton
- Minimum height: 165mm
- First Lifting height: 98mm
- Second Lifting height: 92mm
- Adjust height: 55
- Maximum height: 410mm
- N.W.(kg): 2.9



### D01A085 3-4Ton Hydraulic Double Ram Bottle Jack

- Capacity: 3-4Ton
- Minimum height: 150mm
- First Lifting height: 80mm
- Second Lifting height: 80mm
- Adjust height: 35
- Maximum height: 345mm
- N.W.(kg): 4.2



### D01A087 5-6Ton Hydraulic Double Ram Bottle Jack

- Capacity: 5-6Ton
- Minimum height: 154mm
- First Lifting height: 80mm
- Second Lifting height: 80mm
- Adjust height: 40
- Maximum height: 354mm
- N.W.(kg): 5.5



### D01A015 15Ton Hydraulic Bottle Jack

- Capacity: 15Ton
- Minimum height: 215mm
- Lifting height: 130mm
- Adjust height: 60mm
- Maximum height: 405mm
- N.W.(kg): 7.9



### D01A017 20Ton Hydraulic Bottle Jack

- Capacity: 20Ton
- Minimum height: 230mm
- Lifting height: 140mm
- Adjust height: 60mm
- Maximum height: 430mm
- N.W.(kg): 10.5



### D01A019 25Ton Hydraulic Bottle Jack

- Capacity: 25Ton
- Minimum height: 244mm
- Lifting height: 145mm
- Adjust height: -
- Maximum height: 389mm
- N.W.(kg): 11.5



### D01A089 8Ton Hydraulic Double Ram Bottle Jack

- Capacity: 8Ton
- Minimum height: 156mm
- First Lifting height: 80mm
- Second Lifting height: 80mm
- Adjust height: 40
- Maximum height: 356mm
- N.W.(kg): 6



### D01A091 10Ton Hydraulic Double Ram Bottle Jack

- Capacity: 10Ton
- Minimum height: 225mm
- First Lifting height: 140mm
- Second Lifting height: 145mm
- Adjust height: 50
- Maximum height: 560mm
- N.W.(kg): 8.5



### D01A093 12Ton Hydraulic Double Ram Bottle Jack

- Capacity: 12Ton
- Minimum height: 230mm
- First Lifting height: 140mm
- Second Lifting height: 145mm
- Adjust height: 50
- Maximum height: 565mm
- N.W.(kg): 10.5



**D01A095**  
15-16Ton Hydraulic Double Ram Bottle Jack

- Capacity: 2Ton
- Minimum height: 148mm
- Lifting height: 80mm
- Adjust height: 50mm
- Maximum height: 278mm
- N.W.(kg):2.3



**D01B012**  
5.5KG 2Ton Floor Jack

- Capacity :2Ton
- Minimum height:135mm
- Lifting height:165mm
- Maximum height:300mm
- N.W.(kg):5.5



**D01B015**  
7KG 2Ton Floor Jack

- Capacity :2Ton
- Minimum height:135mm
- Lifting height:185mm
- Maximum height:320mm
- N.W.(kg):7



**D01B017**  
8.5KG 2Ton Floor Jack

- Capacity :2Ton
- Minimum height:140mm
- Lifting height:210mm
- Maximum height:350mm
- N.W.(kg):8.5



**D01A097**  
20Ton Hydraulic Double Ram Bottle Jack

- Capacity:20Ton
- Minimum height: 235mm
- First Lifting height:140mm
- Second Lifting height:145mm
- Adjust height:50
- Maximum height:570mm
- N.W.(kg):15.5



**D01B013**  
6KG 2Ton Floor Jack

- Capacity :2Ton
- Minimum height:140mm
- Lifting height:155mm
- Maximum height:295mm
- N.W.(kg):6



**D01B016**  
27.5KG 2Ton Floor Jack

- Capacity :2Ton
- Minimum height:135mm
- Lifting height:205mm
- Maximum height:340mm
- N.W.(kg):7.5



**D01B018**  
9KG 2Ton Floor Jack

- Capacity:50Ton
- Minimum height: 265mm
- Lifting height: 180mm
- Adjust height:-
- Maximum height:445mm
- N.W.(kg):21



**D01A099**  
30-32Ton Hydraulic Double Ram Bottle Jack

- Capacity:30-32Ton
- Minimum height: 250mm
- First Lifting height:140mm
- Second Lifting height:140mm
- Adjust height:-
- Maximum height:530mm
- N.W.(kg):22



**D01B014**  
6.5KG 2Ton Floor Jack

- Capacity :2Ton
- Minimum height:125mm
- Lifting height:175mm
- Maximum height:300mm
- N.W.(kg):6.5



**D01B017B**  
7.5KG 2Ton Floor Jack

- Capacity :2Ton
- Minimum height:130mm
- Maximum height:327mm
- N.W.(kg):8.5



**D01B020**  
10.5KG 2T Floor Jack

- Capacity :2Ton
- Minimum height:80mm
- Lifting height:250mm
- Maximum height:330mm
- N.W.(kg):10.5



**D01B020B**  
10.5KG 2Ton Floor Jack

- Capacity :2Ton
- Minimum height:135mm
- Maximum height:380mm
- Meets ANSI/ASME 2009
- Gs Certificated
- N.W.(kg):10.5



**D01B053**  
22KG 2.25Ton Floor Jack

- Capacity :2.25Ton
- Minimum height:140mm
- Lifting height:320mm
- Maximum height:560mm
- N.W.(kg):22



**D01B153**  
30KG 3T Floor Jack

- Capacity :3Ton
- Minimum height:135mm
- Lifting height:365mm
- Maximum height:500mm
- N.W.(kg):30



**D01B023**  
12KG 2Ton Floor Jack

- Capacity :2Ton
- Minimum height:135mm
- Maximum height:385mm
- Meets ANSI/ASME 2009
- Gs Certificated
- N.W.(kg):12



**D01B113**  
28KG 2.5Ton Floor Jack

- Capacity :2.5Ton
- Minimum height:135mm
- Lifting height:365mm
- Maximum height:500mm
- N.W.(kg):28



**D01B155**  
35KG 3Ton Floor Jack

- Capacity :3Ton
- Minimum height:130mm
- Maximum height:495mm
- Net Weight: 35 Kgs



**D01B026**  
14KG 2Ton Floor Jack

- Capacity :2Ton
- Minimum height:85mm
- Maximum height:370mm
- GS CERTIFICATED
- N.W.(kg):14



**D01B143**  
26KG 2.5Ton Floor Jack

- Capacity :2.5Ton
- Minimum Height: 3-3/16"
- Maximum Height: 15-5/16"
- Steel construction
- Low 3 1/8in.H saddle fits conveniently under low vehicles
- Includes two flip sockets (11/16in., 3/4in., 13/16in. and 7/8in.) that store on jack
- With LED Light and Sockets



**D01B213**  
36KG 3.5T Floor Jack

- Capacity :3.5Ton
- Minimum height:138mm
- Lifting height:382mm
- Maximum height:520mm
- Net Weight: 36 Kgs



**D01E644**  
30Ton/15Ton Pneumatic Floor Jack 34KG

- Capacity: 35Ton/15Ton
- Working Pressure:0.8-1.0Mpa
- Minimum height: 210mm
- Lifting height: 30T:129mm/15T:112mm
- Extension height:75mm+45mm
- N.W.(kg):34



**D01E653**  
40Ton/20Ton Pneumatic Floor Jack

- Capacity: 40Ton/20Ton
- Working Pressure:0.8-1.0Mpa
- Minimum height: 210mm
- Lifting height: 40Ton: 129mm/20Ton:110mm
- Extension height:75mm+45mm
- N.W.(kg):37



**D01E673**  
30Ton/15Ton Pneumatic Floor Jack

- Capacity: 30Ton/15Ton
- Working Pressure:0.8-1.0Mpa
- Minimum height: 210mm
- Lifting height: 30Ton: 129mm/15Ton:112mm
- Extension height:75mm+45mm
- N.W.(kg):42



**D01E683**  
40Ton/20Ton Pneumatic Floor Jack

- Capacity: 40Ton/20Ton
- Working Pressure:0.8-1.0Mpa
- Minimum height: 210mm
- Lifting height: 40Ton: 129mm/20Ton:110mm
- Extension height:75mm+45mm
- N.W.(kg):44



**D01E713**  
25Ton/10Ton Pneumatic Floor Jack

- Capacity: 25Ton/10Ton
- Working Pressure:0.8-1.2Mpa
- Minimum height: 185mm
- Lifting height: 25Ton:97mm/10Ton:95mm
- Extension height:75mm+45mm
- N.W.(kg):53



**D01E723**  
40Ton/20Ton Pneumatic Floor Jack

- Capacity: 40Ton/20Ton
- Working Pressure:0.8-1.2Mpa
- Minimum height: 190mm
- Lifting height: 40Ton:103mm/20Ton:87mm
- Extension height:75mm+45mm
- N.W.(kg):62



**D01E733**  
50Ton/25Ton Pneumatic Floor Jack

- Capacity: 50Ton/25Ton
- Working Pressure:0.8-1.2Mpa
- Minimum height: 215mm
- Lifting height: 50Ton:117mm/25Ton:114mm
- Extension height:75mm+45mm
- N.W.(kg):76



**D01E734**  
60Ton/40Ton Pneumatic long Floor Jack

- Capacity: 60Ton/40Ton
- Working Pressure:0.8-1.2Mpa
- Minimum height: 220mm
- Lifting height: 60Ton: 122mm/40Ton:114mm
- Extension height:75mm+45mm
- N.W.(kg):85



**D01E743**  
80Ton/50Ton Pneumatic Floor Jack

- Capacity: 80Ton/50Ton
- Working Pressure:0.8-1.2Mpa
- Minimum height: 230mm
- Lifting height: 80Ton: 110mm/50Ton:100mm
- Extension height:75mm+45mm
- N.W.(kg):106



**D01E753**  
50Ton/25Ton/10Ton Pneumatic Floor Jack

- Capacity: 50Ton/25Ton/10Ton
- Working Pressure:0.8-1.2Mpa
- Minimum height: 160mm
- Lifting height: 50Ton:62mm/25Ton: 61mm/10Ton:69mm
- Extension height:75mm+45mm
- N.W.(kg):61



**D01E763**  
60Ton/40Ton/20Ton Pneumatic Floor Jack

- Capacity: 60Ton/40Ton/20Ton
- Working Pressure:0.8-1.2Mpa
- Minimum height: 175mm
- Lifting height: 60Ton:77mm/40Ton: 70mm/20Ton:82mm
- Extension height:75mm+45mm
- N.W.(kg):73



**D01E765**  
60Ton/40Ton/22Ton/11Ton Pneumatic Floor Jack

- Capacity: 60Ton/40Ton/22Ton/11Ton
- Working Pressure:0.8-1.2Mpa
- Minimum height: 150mm
- Lifting height: 60Ton:55mm/40Ton: 48mm/22Ton:53mm/11Ton:58mm
- Extension height:75mm+45mm
- N.W.(kg):66



**D01F012**  
2Ton Air/Hydraulic Long Floor Jack

- Capacity :2Ton
- Minimum height:98mm
- Maximum height:505mm
- Air Pressure 0.7-1.0Mpa
- N.W.(kg):60



**D01F013**  
3Ton Air/Hydraulic Long Floor Jack

- Capacity :3Ton
- Minimum height:95mm
- Maximum height:600mm
- Air Pressure 0.7-1.0Mpa
- N.W.(kg):95



**D01F015**  
5Ton Air/Hydraulic Long Floor Jack

- Capacity :5Ton
- Minimum height:150mm
- Maximum height:560mm
- Air Pressure 0.7-1.0Mpa
- N.W.(kg):100



**D01F020**  
10Ton Air/Hydraulic Long Floor Jack

- Capacity :10Ton
- Minimum height:160mm
- Maximum height:560mm
- Air Pressure 0.7-1.0Mpa
- N.W.(kg):131



**D01G015**  
1.5Ton Aluminum Floor Jack

- Capacity: 1.5Ton
- Minimum height: 80mm
- Lifting height: 295mm
- Maximum height:375mm
- N.W.(kg):13



**D01G052**  
2Ton Aluminum Floor Jack

- Capacity: 2Ton
- Minimum height: 90mm
- Lifting height: 360mm
- Maximum height:450mm
- N.W.(kg):19



**D01G015**  
2.5Ton Aluminum Floor Jack

- Capacity: 2.5Ton
- Minimum height: 100mm
- Lifting height: 360mm
- Maximum height:460mm
- N.W.(kg):25



**D01H013**  
1.8Ton Air Bag Jack 19KG

- Capacity: 1.8Ton
- Minimum height: 150mm
- Maximum height:435mm
- N.W.(kg):19



**D01H014**  
1.8Ton Air Bag Jack 19KG

- Capacity: 1.8Ton
- Minimum height: 150mm
- Maximum height:435mm
- N.W.(kg):20



**D01B215**  
46KG 3.5T Floor Jack

- Capacity :3.5Ton
- Minimum height:80mm
- Lifting height:450mm
- Maximum height:530mm
- Net Weight: 46 Kgs



**D01B413**  
50KG 5Ton Floor Jack

- Capacity :5Ton
- Minimum height:145mm
- Lifting height:395mm
- Maximum height:540mm
- N.W.(kg):50



**D01B635**  
35KG 2Ton Triple lift Service Floor Jack

- Capacity: 2Ton.
- Min Height: 140/154mm(5.5"/ 6").
- Max Height: 432/445mm(17"/ 17.5").
- N.W Weight: 35KG.
- Safety bar locks jack in raised position.
- Wide base and wheels for added stability.
- Lift Range of 6" - 17.5" with saddle in place and 5.5" - 17" with saddle removed.
- CE Certificated



**D01C013**  
2Ton Long Floor Jack

- OD 9 mm camera
- Effective pixel: 1080x720
- 4 adjustable LEDs
- Cable Length:100cm
- Waterproof camera tube: IP67
- Function: zoom/recording picture/vedio
- Frame Rate: 25 fps
- Field of View (FOV):Horizontal: 50° Vertical:38°
- Depth of Field (DOF):3-7cm
- Free APP available for IOS & Android systems



**D01C023**  
3Ton Long Floor Jack

- Capacity :3Ton
- Minimum height:145mm
- Lifting height:465mm
- Maximum height:610mm
- N.W.(kg):80



**D01C033**  
5Ton Long Floor Jack

- Capacity :5Ton
- Minimum height:160mm
- Lifting height:400mm
- Maximum height:560mm
- N.W.(kg):95



**D01C043**  
8Ton Long Floor Jack

- Capacity :8Ton
- Minimum height:180mm
- Lifting height:400mm
- Maximum height:580mm
- N.W.(kg):105



**D01C053**  
10Ton Long Floor Jack

- Capacity :10Ton
- Minimum height:170mm
- Lifting height:400mm
- Maximum height:570mm
- N.W.(kg):140



**D01C063**  
20Ton Long Floor Jack

- Capacity :20Ton
- Minimum height:220mm
- Lifting height:460mm
- Maximum height:680mm
- N.W.(kg):230



**D01D013**  
5Ton Air/Hydraulic Bottle Jack

- Capacity: 5Ton
- Minimum height: 210mm
- Lifting height: 160mm
- Adjust height:60mm
- Maximum height:430mm
- N.W.(kg):6



**D01D023**  
12Ton Air/Hydraulic Bottle Jack

- Capacity: 12Ton
- Minimum height: 250mm
- Lifting height: 150mm
- Adjust height:80mm
- Maximum height:480mm
- N.W.(kg):12



**D01D033**  
20Ton Air/Hydraulic Bottle Jack

- Capacity: 20Ton
- Minimum height: 260mm
- Lifting height: 150mm
- Adjust height:80mm
- Maximum height:490mm
- N.W.(kg):17



**D01D043**  
30Ton Air/Hydraulic Bottle Jack

- Capacity: 30Ton
- Minimum height: 260mm
- Lifting height: 155mm
- Adjust height:-
- Maximum height:415mm
- N.W.(kg):21



**D01D063**  
50Ton Air/Hydraulic Bottle Jack

- Capacity: 50Ton
- Minimum height: 280mm
- Lifting height: 160mm
- Adjust height:-
- Maximum height:440mm
- N.W.(kg):35



**D01E033**  
22Ton Pneumatic Floor Jack

- Capacity: 22Ton
- Minimum height: 225+20mm
- Maximum height:435+100mm
- Adjust height:80mm
- Lifting height:130mm
- N.W.(kg):36



**D01E053**  
35Ton Pneumatic Floor Jack

- Capacity: 35Ton
- Minimum height: 257+20mm
- Maximum height:527+100mm
- Adjust height:120mm
- Lifting height:150mm
- N.W.(kg):42



**D01E613**  
30Ton/15Ton Pneumatic Floor Jack

- Capacity: 30Ton/15Ton
- Working Pressure:0.8-1.0Mpa
- Minimum height: 175mm
- Lifting height: 30Ton:97mm/15Ton:75mm
- Extension height:75mm+45mm
- N.W.(kg):31




**D01E623**  
40Ton/20Ton Pneumatic Floor Jack

- Capacity: 40Ton/20Ton
- Working Pressure:0.8-1.0Mpa
- Minimum height: 175mm
- Lifting height: 40Ton:97mm/20Ton:75mm
- Extension height:75mm+45mm
- N.W.(kg):34



**D01E643**  
30Ton Air/Hydraulic Bottle Jack

- Capacity: 35Ton/15Ton
- Working Pressure:0.8-1.0Mpa
- Minimum height: 150mm
- Lifting height: 30Ton:74mm/15Ton:68mm
- Extension height:75mm+45mm
- N.W.(kg):30

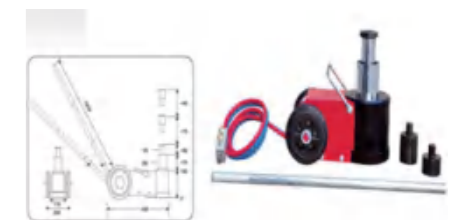

**D01H023**  
2.2Ton Air Bag Jack 18KG

- Capacity: 2.2Ton
- Minimum height: 145mm
- Maximum height: 305mm
- N.W.(kg):18



**D01H024**  
2.2Ton Air Bag Jack 23KG

- Capacity: 2.2Ton
- Minimum height: 145mm
- Maximum height: 305mm
- N.W.(kg):23



**D01H535**  
130KG 2.5Ton Air Pneumatic Lift & Move System

- Capacity: 2.5Ton
- Min Height: 138mm
- Max Height: 550mm
- Working Temp.: -60°C~50°C
- CE Certificated
- Easy to push the vehicle around the body shop on trolley wheels
- Working pressure.: 87-116psi(6-8KG)



**D01I020**  
20" Farm Jack

- Size: 20inches
- Minimum height:153mm
- Maximum height:500mm
- N.W.(kg):12



**D01I033**  
33" Farm Jack

- Size: 33inches
- Minimum height:154mm
- Maximum height:700mm
- N.W.(kg):13



**D01I048**  
48" Farm Jack

- Size: 48inches
- Minimum height:155mm
- Maximum height:1070mm
- N.W.(kg):14



**D01I060**  
60" Farm Jack

- Size: 60inches
- Minimum height: 155mm
- Maximum height:1350mm
- N.W.(kg):15



**D01J012**  
1Ton Scissors Jack 2KG

- Capacity :1Ton
- Minimum height:90mm
- Maximum height:310mm
- N.W.(kg):2



**D01J014**  
1Ton Scissors Jack 2.4KG

- Capacity :1Ton
- Minimum height:90mm
- Maximum height:345mm
- N.W.(kg):2.4



**D01J016**  
1Ton Scissors Jack 2.6KG

- Capacity :1Ton
- Minimum height:190mm
- Maximum height:350mm
- N.W.(kg):2.6



**D01J018**  
1Ton Scissors Jack

- Capacity :1Ton
- Minimum height:90mm
- Maximum height:380mm
- N.W.(kg):2.8



**D01J022**  
1.5Ton Scissors Jack

- Capacity :1.5Ton
- Minimum height:105mm
- Maximum height:380mm
- N.W.(kg):3.2



**D01J112**  
2Ton Scissors Jack

- Capacity :2Ton
- Minimum height:174mm
- Maximum height:340mm
- N.W.(kg):13.5



**D01J212**  
7500LBS Scissors Jack

- Capacity :7500LBS
- Minimum height:120mm
- Maximum height:650mm
- N.W.(kg):5.9



**D01L032**  
3.2Ton Screw Jack

- Capacity :3.2Ton
- Minimum height:225mm
- Lifting height:110mm
- N.W.(kg):5



**D01L050**  
5Ton Screw Jack

- Capacity :5Ton
- Minimum height:250mm
- Lifting height:130mm
- N.W.(kg):6



**D01L080**  
8Ton Screw Jack

- Capacity :8Ton
- Minimum height:255mm
- Lifting height:130mm
- N.W.(kg):6.5



**D01L100**  
10Ton Screw Jack 6KG

- Capacity :10Ton
- Minimum height:195mm
- Lifting height:80mm
- N.W.(kg):6



**D01L103**  
10Ton Screw Jack 9KG

- Capacity :10Ton
- Minimum height:275mm
- Lifting height:150mm
- N.W.(kg):9



**D01L116**  
16Ton Screw Jack

- Capacity :16Ton
- Minimum height:300mm
- Lifting height:180mm
- N.W.(kg):10.5



**D01L120**  
20Ton Screw Jack 11KG

- Capacity :20Ton
- Minimum height:230mm
- Lifting height:100mm
- N.W.(kg):11



**D01L123**  
20Ton Screw Jack 13KG

- Capacity :20Ton
- Minimum height:325mm
- Lifting height:180mm
- N.W.(kg):13



**D01L125**  
25Ton Screw Jack

- Capacity :25Ton
- Minimum height:265mm
- Lifting height:125mm
- N.W.(kg):12



**D01L132**  
32Ton Screw Jack 18KG

- Capacity :32Ton
- Minimum height:315mm
- Lifting height:180mm
- N.W.(kg):18



### D01L133 32Ton Screw Jack 21KG

- Capacity :32Ton
- Minimum height:390mm
- Lifting height:200mm
- N.W.(kg):21



### D01L180 100Ton Screw Jack

- Capacity :100Ton
- Minimum height:450mm
- Lifting height:200mm
- N.W.(kg):70



### D01N013 3Ton Long Ram Jack

- Capacity: 3Ton
- Minimum height: 630mm
- Lifting height: 495mm
- Maximum height:1125mm
- N.W.(kg):9



### D01N031 8 Ton Long Ram Hydraulic Jack (Flat bottom)

- Capacity: 8 Ton.
- Min Height: 610mm.
- Max Height: 1090mm.
- Ideal for Extra Long Power Strokes.
- Includes the ram, fluid inside, and the handle as shown.
- Flat bottom jack.
- Weight: 11KG



### D01L150 50Ton Screw Jack 29KG

- Capacity :50Ton
- Minimum height:320mm
- Lifting height:150mm
- N.W.(kg):29



### D01L200 200Ton Screw Jack

- Capacity :200Ton
- Minimum height:470mm
- Lifting height:200mm
- N.W.(kg):130



### D01N020 5Ton Long Ram Jack

- Capacity: 5Ton
- Minimum height: 630mm
- Lifting height: 495mm
- Maximum height:1125mm
- N.W.(kg):10



### D01N033 1Ton Scissors Jack

- Capacity: 8 Ton.
- Min Height: 495mm.
- Max Height: 630mm.
- Ideal for Extra Long Power Strokes.
- Includes the ram, fluid inside, and the handle as shown.
- Weight: 11KG



### D01L151 50Ton Screw Jack 37KG

- Capacity :50Ton
- Minimum height:440mm
- Lifting height:250mm
- N.W.(kg):37



### D01M013 Floor Support jack

- Adjustable Floor Jack
- Adjustable, easy-to-assemble, easy-to-install floor jacks are designed for use during remodeling projects to reinforce stairs, porches, decks, or weak floors.
- Constructed of premium quality steel and coated to prevent corrosion.



### D01N030 8Ton Long Ram Jack

- Capacity: 8Ton
- Minimum height: 630mm
- Lifting height: 490mm
- Maximum height:1120mm
- N.W.(kg):10



### D01N513 3Ton Air/Hydraulic Long Ram Jack

- Capacity: 3Ton
- Minimum height: 630mm
- Lifting height: 495mm
- Maximum height:1125mm
- N.W.(kg):13



### D01N520 5Ton Air/Hydraulic Long Ram Jack

- Capacity: 5Ton
- Minimum height: 630mm
- Lifting height: 495mm
- Maximum height:1125mm
- N.W.(kg):14



### D01O015 5Ton Lifting Jack

- Capacity: 5Ton
- Minimum height: 75mm
- Lifting height: 645mm
- Maximum height:720mm
- N.W.(kg):32



### D01P023 5Ton Fork Lift Jack

- Capacity: 5Ton
- Minimum height: 65mm
- Lifting height: 360mm
- Maximum height:425mm
- N.W.(kg):45



### D01Q014 4Ton Porta Power Jack 20KG

- Capacity: 4Ton
- Minimum height: 270mm
- Lifting height: 125mm
- Maximum height:395mm
- N.W.(kg):20



### D01N530 8Ton Air/Hydraulic Long Ram Jack

- Capacity: 8Ton
- Minimum height: 630mm
- Lifting height: 490mm
- Maximum height:1120mm
- N.W.(kg):14



### D01O020 10Ton Lifting Jack

- Capacity: 10Ton
- Minimum height: 85mm
- Lifting height: 715mm
- Maximum height:800mm
- N.W.(kg):51



### D01P033 7Ton Fork Lift Jack

- Capacity: 7Ton
- Minimum height: 65mm
- Lifting height: 355mm
- Maximum height:420mm
- N.W.(kg):48



### D01Q023 10Ton Portable Jack 32KG

- Capacity: 10Ton
- Minimum height: 237mm
- Lifting height: 130mm
- Maximum height:367mm
- N.W.(kg):32



### D01O013 3Ton Lifting Jack

- Capacity: 3Ton
- Minimum height: 75mm
- Lifting height: 650mm
- Maximum height:725mm
- N.W.(kg):23



### D01P013 4Ton Fork Lift Jack

- Capacity: 4Ton
- Minimum height: 65mm
- Lifting height: 340mm
- Maximum height:405mm
- N.W.(kg):33



### D01Q013 4Ton Porta Power Jack 19KG

- Capacity: 4Ton
- Minimum height: 260mm
- Lifting height: 120mm
- Maximum height:380mm
- N.W.(kg):19



### D01Q024 10Ton Portable Jack 32KG

- Capacity: 10Ton
- Minimum height:223mm
- Lifting height:135mm
- Maximum height:358mm
- N.W.(kg):32





**D01Q033**  
10Ton Portable Jack With Wheel 32KG

- Capacity: 10Ton
- Minimum height:223mm
- Lifting height:135mm
- Maximum height:358mm
- N.W.(kg):32



**D01S023**  
Multifunctional Jack 4.96KG

- Capacity: 1.2Ton
- Minimum height: 130mm
- Maximum height:290mm
- Operating Voltage:12V
- Operating Current:13A
- Air Pressure Default:0-3Bar
- Pipe Length:73cm
- Control Mode:Remote Control
- N.W.(kg):4.96



**D01S033**  
Ordinary Electric Jack 3.93KG

- Capacity: 1.2Ton
- Minimum height: 130mm
- Maximum height:290mm
- Operating Voltage:12V
- Operating Current:13A
- Control Mode:Manual Control
- N.W.(kg):3.93



**D01Y015**  
Cross Beam Adapter

- Capacity: 2Ton
- Adjust Hight:0-55MM
- Working Range:590-930MM
- N.W.(kg):20



**D01Q034**  
10T Portable Jack With Wheel 33kg

- Capacity: 10T
- Minimum height:228mm
- Lifting height:130mm
- Maximum height:358mm
- N.W.(kg):33



**D01S024**  
Multifunctional Jack 5.12KG

- Capacity: 1.2Ton
- Minimum height: 150mm
- Maximum height:350mm
- Operating Voltage:12V
- Operating Current:13A
- Air Pressure Default:0-3Bar
- Pipe Length:73cm
- Control Mode:Remote Control
- N.W.(kg):5.12



**D01S034**  
Ordinary Electric Jack

- Capacity: 1.2Ton
- Minimum height: 150mm
- Maximum height:350mm
- Operating Voltage:12V
- Operating Current:13A
- Control Mode:Manual Control
- N.W.(kg):4.09



**D01Z013**  
Lifting Car Ramp With 2Ton Jack

- Capacity: 2Ton
- Min. hight: 270mm
- Max. hight: 400mm



**D01S013**  
Electric Car Jack

- Capacity: 5Ton
- Minimum height: 177mm
- Lifting height: 105mm
- Adjust height:60mm
- Maximum height:342mm
- N.W.(kg):4



**D01S025**  
Multifunctional Jack 5.23KG

- Capacity: 1.2Ton
- Minimum height: 165mm
- Maximum height:395mm
- Operating Voltage:12V
- Operating Current:13A
- Air Pressure Default:0-3Bar
- Pipe Length:73cm
- Control Mode:Remote Control
- N.W.(kg):5.23



**D01S035**  
Ordinary Electric Jack 4.2KG

- Capacity: 1.2Ton
- Minimum height: 165mm
- Maximum height:395mm
- Operating Voltage:12V
- Operating Current:13A
- Control Mode:ManualControl
- N.W.(kg):4.2



**D03A015**  
0.5Ton Low Position Transmission Jack

- Capacity: 0.5Ton
- Minimum height:190mm
- Maximum height:680mm
- N.W.(kg):38



**D03A020**  
1Ton Low Position Transmission Jack

- Capacity: 1Ton
- Minimum height:190mm
- Maximum height:780mm
- N.W.(kg):59



**D03A035**  
3Ton Low Position Transmission Jack

- Capacity: 3Ton
- Minimum height:250mm
- Maximum height:1010mm
- N.W.(kg):90



**D03B017**  
0.5Ton Telescopic Transmission Jack 28KG

- Capacity: 0.5Ton
- Minimum height:1300mm
- Maximum height:1800mm
- N.W.(kg):28



**D03B033**  
0.5Ton Telescopic Transmission Jack 53KG

- Capacity: 0.5Ton
- Minimum height:850mm
- Maximum height:1800mm
- N.W.(kg):55



**D03A025**  
1.5Ton Low Position Transmission Jack

- Capacity: 1.5Ton
- Minimum height:230mm
- Maximum height:890mm
- N.W.(kg):73



**D03B013**  
0.5Ton Telescopic Transmission Jack 25KG

- Capacity: 0.5Ton
- Minimum height:1000mm
- Maximum height:1900mm
- N.W.(kg):25



**D03B018**  
0.5Ton Telescopic Transmission Jack 37KG

- Capacity: 0.5Ton
- Minimum height:1100mm
- Maximum height:1900mm
- N.W.(kg):37



**D03B034**  
0.5Ton Telescopic Transmission Jack 55KG

- Capacity: 0.5Ton
- Minimum height:855mm
- Maximum height:1800mm
- N.W.(kg):53



**D03A030**  
2Ton Low Position Transmission Jack

- Capacity: 2Ton
- Minimum height:195mm
- Maximum height:905mm
- N.W.(kg):128



**D03B014**  
0.5Ton Telescopic Transmission Jack 26KG

- Capacity: 0.5Ton
- Minimum height:1000mm
- Maximum height:1900mm
- N.W.(kg):26



**D03B025**  
0.5Ton Telescopic Transmission Jack 37KG

- Capacity: 0.5Ton
- Minimum height:870mm
- Maximum height:1740mm
- N.W.(kg):37



**D03B053**  
1Ton Air Transmission jack

- Capacity: 1Ton
- Minimum height:830mm
- Maximum height:1760mm
- N.W.(kg):80



**D03C015**  
Transmission Adaptor

- Capacity: 0.5Ton
- Measurement:470\*250\*130mm
- N.W.(kg):12



**D05A015**  
750LBS Engine Stand

- Capacity: 750LBS
- Maximum height:800mm
- N.W.(kg):18



**D05A035**  
1000LBS Engine Stand

- Capacity:1000LBS
- Maximum height:800mm
- N.W.(kg):23



**D05A065**  
1500LBS Engine Stand

- Capacity:1500LBS
- Maximum height:820mm
- N.W.(kg):34



**D05A075**  
2000LBS Engine Stand

- Capacity:2000LBS
- Maximum height:815mm
- N.W.(kg):36



**D05A055**  
1250LBS Engine Stand

- Capacity:1250LBS
- Maximum height:820mm
- N.W.(kg):27



**D07A015**  
1000lbs Ford Engine Cradle

- Heavy Duty Steel Construction for Added Strength
- Strong and durable with its heavy duty steel construction
- Maneuver the cradle/dolly easily through its four 3-inch swivel casters.
- High-quality powder coating finish resistant to chipping, scratching, UV damage, and corrosion



**D07A025**  
1000lbs Chevrolet Engine Cradle

- Heavy duty steel construction for added strength
- Four 3" swivel casters for easy maneuverability
- Capacity(LB):1000



**D05B105**  
2000LBS Foldable Engine Stand

- Capacity:2000LBS
- Maximum height:850mm
- N.W.(kg):38



**D09A013**  
1Ton Shop Crane

- Capacity: 1Ton
- Lifting Height: 2300mm



**D09A023**  
2Ton Shop Crane

- Capacity: 2Ton
- Lifting Height: 2380mm



**D09A033**  
3Ton Shop Crane

- Capacity: 3Ton
- Lifting Height: 2200mm
- N.W.(kg):113



**D09B013**  
1Ton Foldable Shop Crane

- Capacity: 1Ton
- Lifting Height: 2120mm
- N.W.(kg):65



**D09B023**  
2Ton Foldable Shop Crane

- Capacity: 2Ton
- Lifting Height: 2350mm
- N.W.(kg):75



**D09C013**  
750LB Load Leveler

- Capacity: 750LB
- Working Range: 415mm
- N.W.(kg):4.7



**D09C023**  
1000LB Load Leveler

- Capacity: 1000LB
- Working Range: 430mm
- N.W.(kg):5.3



**D09C025**  
Load Leveler

- Capacity: 1000LB
- Working Range: 430mm
- N.W.(kg):6



**D09C033**  
1500LB Load Leveler

- Capacity: 1500LB
- Working Range: 430mm
- N.W.(kg):5.5



**D09C043**  
2000LB Load Leveler

- Capacity: 2000LB
- Working Range: 315mm
- N.W.(kg):5.8



**D09C053**  
4000LB Load Leveler

- Capacity: 4000LB
- Working Range: 385mm
- N.W.(kg):6.5



**D09Y013**  
Engine Lifting Sling

- Heavy duty zinc plated steel chain
- The Engine Lifting Sling sizes are 36" (L) X 8mm (D), 4mm plate.
- 650 lbs maximum working lift rates
- This Engine Lifting Sling is great for many automotive uses, ideal for engine removal or installation



**D17A145**  
10Ton Shop Press With Gauge

- Capacity:10Ton
- Stroke:135mm
- Working Distanc:358mm
- N.W.(kg):51



**D17A155**  
12Ton Shop Press With Gauge

- Capacity:12Ton
- Stroke:150mm
- Working Distanc:917mm
- N.W.(kg):71



**D17A185**  
20Ton Shop Press With Gauge

- Capacity:20Ton
- Stroke:190mm
- Working Distanc:1025mm
- N.W.(kg):97



**D17A225**  
30Ton Shop Press With Gauge

- Capacity:30Ton
- Stroke:190mm
- Working Distanc:965mm
- N.W.(kg):127



**D17A245**  
40Ton Shop Press With Gauge

- Capacity:40Ton
- Stroke:235mm
- Working Distanc:885mm
- N.W.(kg):225



**D17A255**  
50Ton Shop Press With Gauge

- Capacity:50Ton
- Stroke:235mm
- Working Distanc:885mm
- N.W.(kg):235



**D17B020**  
20Ton Air/Hydraulic Shop Press

- Capacity:20Ton
- Stroke:140mm
- Working Distanc:1020mm
- N.W.(kg):135



**D17B040**  
40Ton Air/Hydraulic Shop Press

- Capacity:40Ton
- Stroke:200mm
- Working Distanc:1050mm
- N.W.(kg):220



**D17B060**  
60Ton Air/Hydraulic Shop Press

- Capacity:60Ton
- Stroke:220mm
- Working Distanc:1060mm
- N.W.(kg):315



**D17B110**  
10Ton Air/Hydraulic Shop Press With Gauge

- Capacity:10Ton
- Stroke:135mm
- Working Distanc:858mm
- N.W.(kg):72



**D17B112**  
12Ton Air/Hydraulic Shop Press With Gauge

- Capacity:12Ton
- Stroke:135mm
- Working Distanc:858mm
- N.W.(kg):72



**D17B120**  
20Ton Air/Hydraulic Shop Press With Gauge

- Capacity:20Ton
- Stroke:145mm
- Working Distanc:1035mm
- N.W.(kg):92



**D17B130**  
30Ton Air/Hydraulic Shop Press With Gauge

- Capacity:30Ton
- Stroke:150mm
- Working Distanc:820mm
- N.W.(kg):150



**D17B140**  
40Ton Air/Hydraulic Shop Press With Gauge

- Capacity:40Ton
- Stroke:235mm
- Working Distanc:885mm
- N.W.(kg):220



**D17B150**  
50Ton Air/Hydraulic Shop Press With Gauge

- Capacity:50Ton
- Stroke:235mm
- Working Distanc:885mm
- N.W.(kg):235



**D17C050**  
50Ton Electric Shop Press

- Capacity:50Ton
- Stroke:220mm
- Working Distanc:870mm
- N.W.(kg):350



**D17W015**  
6pc Press Accessory Kit

- Used with shop presses with up to 50 ton press capabilities
- Features six common accessories used in a variety of press applications.
- Includes: 1/2 in. Punch 1 in. Punch 2 in. Punch 14 in. x 3 in. x 1 in.
- Steel Press Plates Bearing Shield
- N.W.(kg):13



**D17W025**  
Universal Press Support

- For use with a Workshop Press up to 30 Tonnes.
- This offers an adjustable and stable support base for vehicle hubs and other complicated shapes to allow bearings to be pressed in or out accurately.
- Three point contact guarantees a perfect, safe support 5 adjustable steel support columns.
- 3 x 150mm long.
- 1 x 190mm long.
- 1 x 105mm long



**D19A013**  
1000LB Car Dolly

- Capacity: 1000lbs
- Perfect for moving mobility vehicles.
- Deep wheel wells keep vehicles secure
- N.W.: 22kg



**D19A017**  
1500LB Car Dolly

- Each heavy-duty dolly has a 1,500 lbs. capacity (6,000 lbs. capacity for 4dollies)
- Allows vehicle to be moved in any direction Great for moving cars, trucks, trailers, lawn tractors, etc. against wall or into corner
- Caster size:3"
- N.W.(kg):15



**D19A021**  
Universal Vehicle Dolly-6"wheel

- Includes rocker & Hub adapter
- Configure the wheel dolly to attach in 3 different ways: Rocker Panel, Hub, or wheel on
- Constructed of fully welded Heavy Duty Steel
- 6" poly urethane high-impact wheels
- Casters swivel 360 degrees to allow for multi-Directional Use
- Weight rated at over 4000 lbs per dolly and over 8000 lbs per set



**D19A115**  
9inch Mechanic Positioning Jack

- Capacity: 1500lbs
- Rim width: 9inch
- N.W.(kg):14
- Easily move your trike or car around the shop
- Fully welded heavy-duty steel frame construction



**D19A020**  
Universal Vehicle Dolly-5"wheel

- Includes rocker & Hub adapter
- Configure the wheel dolly to attach in 3 different ways: Rocker Panel, Hub, or wheel on
- Constructed of fully welded Heavy Duty Steel
- 5" Poly URETHANE HIGH-impact wheels
- Casters swivel 360 degrees to allow for multi-Directional Use
- Weight rated at over 3300 lbs per dolly and over 6600 lbs per set



**D09D323**  
Engine Lifting Plate

- Drop forged steel construction
- Zinc plated for durability
- Dimensions: 6 1/2 x 6 1/4 x 2 1/4in
- Plate thickness: 3/16"
- Hole sizes include: 1/4", 3/8", 3/8" x 5/8", 3/4" x 3/8" and 1 1/2" x 1 1/2"



**D09D335**  
Engine Lifting Plate

- Universal design fits more than 90% of common applications including Dominator manifolds
- Makes removing or installing engines with or without the transmission easy
- 1,000 lbs. maximum load
- Product Dimensions: 10 x 8 x 2.5 in
- Product weight: 2.6lb



**D11A011**  
0.3T engine support

- Capacity: 0.3T
- Lifting Height: 730-1380mm
- Height Adjust: 0-305mm
- N.W.(kg):15



**D13A021**  
2Ton Jack Stand

- Capacity: 2Ton.
- Min Height: 321mm.
- Max Height: 447mm.
- Weight: 3.5KG.



**D13A033**  
3Ton Jack Stand

- Capacity: 3Ton
- Minimum height: 285mm
- Maximum height: 428mm
- N.W.(kg): 6.2



**D13A065**  
6Ton Jack Stand

- Capacity: 3Ton
- Minimum height: 390mm
- Maximum height: 605mm
- Ductile iron rack and self locking
- N.W.(kg): 12.3



**D11A013**  
0.5T engine support

- Capacity: 0.5T
- Lifting Height: 1015-1480mm
- Height Adjust: 0-205mm
- N.W.(kg):17



**D11A025**  
14" Adjustable Hook Screws

- Capacity: 750LB
- Width expands from 38" to a full 61"
- Hook Thread Length: 12-1/2"
- N.W.(kg):18



**D13A023**  
2Ton Jack Stand

- Capacity: 0.5T
- Lifting Height: 1015-1480mm
- Height Adjust: 0-205mm
- N.W.(kg):17



**D13A031**  
3Ton Jack Stand

- Capacity: 3Ton.
- Min Height: 340mm.
- Max Height: 500mm.
- Weight: 4.5KG



**D13A035**  
3Ton Jack Stand

- Capacity: 3Ton
- Minimum height: 425mm
- Maximum height: 715mm
- Ductile iron rack and self locking
- N.W.(kg): 6.3



**D13A063**  
6Ton Jack Stand

- Capacity: 6Ton
- Minimum height: 415mm
- Maximum height: 610mm
- N.W.(kg): 11



**D13A123**  
12Ton Jack Stand

- Capacity: 12Ton
- Minimum height: 460mm
- Maximum height: 715mm
- N.W.(kg): 25



**D15A125**  
Underhoist (Auxiliary) Stand with Foot Pedal - 1500LB

- Capacity: 1500LBS
- MIN.H: 1360mm
- MAX.H: 2030mm
- Tough enamel finish
- With Foot Pedal
- ANSI 2009



**D17A025**  
6Ton Shop Press

- Capacity:6Ton
- Stroke:125mm
- Working Distanc:230mm
- N.W.(kg):32



**D17A085**  
20Ton Shop Press

- Capacity:20Ton
- Stroke:145mm
- Working Distanc:790mm
- N.W.(kg):78



**D15A015**  
Underhoist Stand

- Capacity 0.75Ton
- Min Height 1360mm
- Max Height 2030mm
- N.W.(kg):12



**D15B015**  
Tripod Stand

- Capacity 0.75T
- Min Height 1250mm
- Max Height 2128mm
- N.W.(kg):16.3



**D17A055**  
12Ton Shop Press 42KG

- Capacity:12Ton
- Stroke:125mm
- Working Distanc:510mm
- N.W.(kg):42



**D17A086**  
20Ton Shop Press

- Capacity:20Ton
- Stroke:140mm
- Working Distanc:900mm
- N.W.(kg):80



**D15A025**  
Underhoist (Auxiliary) Stand - 1500LB

- Capacity: 1500LBS
- MIN.H: 1360mm
- MAX.H: 2030mm
- Tough enamel finish
- ANSI 2009



**D17A013**  
4Ton Shop Press

- Capacity: 4Ton
- Stroke:110mm
- Working Distanc:330mm
- N.W.(kg):31



**D17A056**  
12Ton Shop Press 43KG

- Capacity:12Ton
- Stroke:125mm
- Working Distanc:630mm
- N.W.(kg):43



**D17A095**  
30Ton Shop Press

- Capacity:30Ton
- Stroke:190mm
- Working Distanc:965mm
- N.W.(kg):105



**D19A117**  
12inch Mechanic Positioning Jack

- Capacity: 1500lbs • Rim width: 12inch
- N.W.(kg):16
- Easily move your trike or car around the shop
- Fully welded heavy-duty steel frame construction



**D19B935**  
Storage Rack For Vehicle Position Jack

- Heavy-duty steel construction
- Durable powder coat finish
- Holds 4 vehicle position jacks
- 3" swivel casters



**D19C033**  
330LBS Tire Wheel Dolly 24" to 36"

- Capacity: 330LBS.
- For all wheels from 24" to 36".
- Spring-loaded kickstand for handy parking.
- Onboard rollers make stud-hole alignment a snap.
- Meets ANSI/ASME 2005.
- CE Certificated.



**D19D035**  
Dual Wheel Dolly

- Capacity: 0.5Ton
- Working Range: 90-255mm
- N.W.: 61kg



**D19B013**  
9inch Hydraulic Positioning Jack

- Capacity: 1500lbs • Rim width: 9inch
- N.W.(kg):17
- Easily move your trike or car around the shop
- Fully welded heavy-duty steel frame construction



**D19C015**  
150LBS Tire Wheel Dolly

- Capacity: 150LBS.
- Spring-loaded kickstand for handy parking.
- Onboard rollers make stud-hole alignment a snap.
- 26" wide carriage



**D19C034**  
330LBS Tire Wheel Dolly 36" to 48"

- Capacity: 330LBS.
- For all wheels from 36" to 48".
- Spring-loaded kickstand for handy parking.
- Onboard rollers make stud-hole alignment a snap.
- Meets ANSI/ASME 2005.
- CE Certificated



**D21A015**  
Clutch Handler

- Capacity: 500 lbs
- Low Height: 13"
- High Height: 39"
- Length: 36-1/2"
- Width: 22"



**D19B015**  
12inch Hydraulic Positioning Jack

- Capacity: 1500lbs • Rim width: 12inch
- N.W.(kg):19
- Easily move your trike or car around the shop
- Fully welded heavy-duty steel frame construction



**D19C030**  
300LBS Tire Wheel Dolly

- Capacity: 300LBS.
- Spring-loaded kickstand for handy parking.
- Onboard rollers make stud-hole alignment a snap.
- 26" wide carriage



**D19C055**  
550LBS Wheel Dolly

- Capacity: 550LBS.
- For all wheels from 6.5" to 22.5".
- Heavy duty industrial bearings
- Avoid damage to wheel bolts and expensive modern rims
- Easy installation and uninstallation of truck wheel assemblies
- CE Certificated



**D23A015**  
Spring Compressor(Manual)

- Capacity:2200LB
- Stroke: 200mm
- Max.Working Length: 200-500mm
- N.W.(kg):34



**D23B015**  
Hydraulic Spring Compressor

- Capacity:1Ton
- Stroke: 100mm
- Max.Working Length: 270mm
- N.W.(kg):19



**D25A015**  
Motorcycle Lift

- Capacity:1100LB
- Min.Height:100mm
- Max.Height:340mm
- Table size:380X230mm
- N.W.(kg): 12.5KG



**D25B025**  
ATV/Motorcycle lift jack

- Capacity: 1500LB
- Minimum height:120mm
- Maximum height:495mm
- N.W.(kg):47



**D25C025**  
ATV/Motorcycle lift Table 800LB

- Capacity: 800LB
- Minimum height:180mm
- Maximum height:680mm
- Table size: 195\*53cm
- Ramp size: 42\*53cm
- N.W.(kg):104



**D23B115**  
Hydraulic Spring Compressor

- Capacity:1Ton
- Stroke: 180mm
- Max.Working Length: 110-570mm
- N.W.(kg):34



**D25A025**  
Motorcycle Lift

- Capacity:1100LB
- Min.Height:95mm
- Max.Height:375mm
- Table size:450X150mm
- N.W.(kg):13



**D25B135**  
ATV/Motorcycle lift jack

- Capacity: 1500LB
- Minimum height:146mm
- Maximum height:420mm
- N.W.(kg):35



**D25C027**  
Hydraulic Motorcycle Lift 800LB

- Capacity: 800LB • MIN.H: 200mm
- MAX.H: 780mm • Table size: 1350\*500mm
- Ramp size: 500\*850mm
- Adjustable foot for increases stability
- Designed for lifting motorcycles when repairing
- Front wheel clamp helps position and secure motorcycle lift
- CE Certificated



**D23C015**  
Air/Hydraulic Spring Compressor

- Capacity:1Ton
- Stroke: 400mm
- Max.Working Length: 210-570mm
- N.W.(kg):37



**D25B015**  
ATV/Motorcycle lift jack

- Capacity: 1500LB
- Minimum height:146mm
- Maximum height:420mm
- N.W.(kg):32



**D25C021**  
Motorcycle lift table

- Capacity:300LB
- Min.Height:350mm
- Max.Height:870mm
- Table size:410X350mm
- N.W.(kg):30



**D25C029**  
Hydraulic Motorcycle Lift 800LB

- Capacity: 800LB • MIN.H: 200mm
- MAX.H: 780mm • Table size: 1350\*500mm
- Ramp size: 500\*850mm
- Adjustable foot for increases stability
- Designed for lifting motorcycles when repairing
- Front wheel clamp helps position and secure motorcycle lift
- CE Certificated



### D25C035 Hydraulic Motorcycle Lift 1000LB

- Capacity: 1000LB
- Mim.H: 195mm
- Max.H: 780mm
- Table size: 1800\*660mm
- Ramp size: 660\*690mm
- Adjustable foot for increases stability
- Designed for lifting motorcycles when repairing
- Front wheel clamp helps position and secure motorcycle lift
- CE Certificated



### D25C037 Hydraulic Motorcycle Lift 1000LB

- Capacity: 1000LB
- Mim.H: 195mm
- Max.H: 780mm
- Table size: 1800\*660mm
- Ramp size: 660\*690mm
- Adjustable foot for increases stability
- Designed for lifting motorcycles when repairing
- Front wheel clamp helps position and secure motorcycle lift
- CE Certificated



### D25C135 ATV/Motorcycle lift Table

- Capacity: 1000LB
- Minimum height:1800mm
- Maximum height:830mm
- Table size: 1950\*710mm
- Ramp size: 580\*710mm
- N.W.(kg):190



### D25D011 Motorcycle Paddock Stands

- Material: Made with Heavy Duty SteelConstruction
- Max Load: 810kgs/1800lbs
- Product height: 40cm/15.74"
- Product length: 60cm/23.62"
- Product width: 60cm/23.62"



### D25D021 Motorcycle Wheel Chock

- Enables one person to easily load and strap down motorcycle
- Heavy duty formed steel
- Durable powder coat finish
- Product height: 35cm/13.78"
- Product length: 55cm/21.65"
- Product width: 27cm/10.63"



### D25D031 Motorcycle Stand

- Capacity:880LB
- Package Size:750X520X360mm
- N.W.(kg):16



### D25D041 Motorcycle Stand

- Capacity:880LB
- Height: 400 mm
- Width:260-360 mm
- N.W.(kg):6



### D25D053 Motorcycle Stand

- Capacity: 1000LB
- Height: 320mm
- Width:240-360 mm



### D25D054 Motorcycle Stand

- Capacity: 1000LB
- Height: 320mm
- Width:240-360 mm



### D27A025 Mini Tilting lift

- Capacity:1500KG
- Total Width:1550mm
- Drive Through width:1185mm
- N.W.(kg):58



### D25Z015 Lawn Mower Lifter

- Square Tube Dimensions: 30 x 30 mm
- Spindle Diameter: 24mm
- Drive Through Width: 105mm
- Dimensions: 122.5X50X20cm
- Lifting Height: 11.5cm-80cm
- Surface Treatment: Spraying Plastics
- Suitable for devices up to 400kg



### D27A125 Adjustable Width Tilting Lift

- Capacity:1500KG
- Min height:150mm
- Max height:585mm
- Adjustable width: 775/1130/1530mm



### D27F045 Two Post Car Lift

- Lifting capacity: 10000lbs/4500kgs
- Lifting height:1961mm
- Over height:3672mm
- Over width:3686mm
- Drive through:2708mm
- Rise/Drop time:50/40s
- Operation mode>manual



### D29A012 2T Pull Back Ram

- Pulling, bending, straightening, you need to configure the hand pump.
- Capacity:2T
- Stroke:125mm
- Max.Height:550mm
- G.W./N.W.:25/24 kgs
- Package size:60\*29\*23/ 8pcs in one carton



### D29B015 Hand Hydraulic Pump

- Heat-treated chrome ram for strength and durability. 100% factory load-tested for reliability and safety.
- Oil reserves:400ml
- Pressure:70mpa
- G/N Weight: 6/5.5kgs



### D27B035 6000LBS Scissor Auto lift

- Capacity: 8Ton
- Minimum height: 630mm
- Lifting height: 490mm
- Maximum height:1120mm
- N.W.(kg):14



### D27J045 4 Post Parking Lift

- Lifting weight:4500Kg
- Overall weight:1100Kg
- Overall height:2176mm
- Overall width:3094mm
- Min lifting palm height:182mm
- Lane width:2600mm
- Motor power:2.2Kw
- Working voltage:380V/220V



### D29A015 5T Pull Back Ram

- All steel construction
- For pulling,bending,and straightening with hand pump
- Capacity:5ton
- Stroke:130mm
- Max.height:650mm
- G.W./N.W.:34/33kg
- Package size:69X29X23cm
- QTY/CTN:6pcs



### D29C015 Air Hydraulic Pump

- Heat-treated chrome ram for strength and durability. 100% factory load-tested for reliability and safety.
- Capacity: 700ml
- Pressure: 398/278mm
- Net weight: 10.5mm
- Air pressure: 0.75--0.85mpa



### D27E025 Single Post Car Lift

- Lifting capacity: 2500kg
- Lifting height: 1900mm
- Height of post: 2500mm
- Mount width: 1400-1700mm
- Lifting/Lowing speed: adjustable
- Noise: <60 d B/m
- Motor capacity: 220V/380V



### D27Y013 4Ton Fork Lift Jack

- Base size (MM) : 370\*350
- Dia of round pan (MM) : 335
- Plates adjust 0-45 degrees
- Full-floating ball bearing design for full wheel movement



### D29A020 10T Pull Back Ram

- All steel construction
- For pulling,bending,and straightening with hand pump
- Capacity:10ton
- Stroke:130mm
- Max.height:700mm
- G.W./N.W.:33/32kg
- Package size:68X34X22cm
- QTY/CTN:4pcs



### D29C021 10Ton Air Hydraulic Pump

- INput air pressure:100 to 120 psi
- Usable oil capacity:690 ml
- Rated pressure:10000 psi
- Output port threads:1/4"-18 npt
- Input port threads:1/4"-18 npt
- Oil hose length:1.8 m
- Fits all standard and long ram hydraulic equipment



### D29D015 Hydraulic Cylinder

- ISO9001 Standard
- Strict Quality Control
- High Precision Machines
- The Competitive Price
- Working Pressure: 2500PSI (21MPa) ~ 4000PSI (28MPa).
- Working Temperature: -20oC ~ 100oC.
- Size: Bore Size -- 20mm ~ 200mm (0.5" ~ 10") Stroke----- 100mm ~ 8000mm (2" ~ 310")



### D29G015 Planishing Hammer

- Overall Dimensions: 1575(H)\*785(W)\*876(L)mm
- Fram tube size:106\*106mm
- Throat:609.6mm
- Head opening:63.5mm
- Air requirements:15-120Psi
- CFM requirements:12
- Blows per minute:4600
- Height adjustment:63.5mm
- N.W./G.W.:53/73kg
- Packing size:1560\*980\*210mm



### D29I125 10Ton Hydraulic Log Splitter

- Capacity: 10Ton
- Max Log Length:18"
- Log Diameter:10"
- N.W.(kg):38
- Package size (CM):112x26x29



### D29E015 Car Frame Straightener

- Capacity: 10Ton
- Stroke: 150mm
- N.W.(kg):205KG
- Package Size(mm):3070\*470\*340



### D29I015 8Ton Log Splitter

- Capacity: 8Ton
- Max Log Length:23"
- Log Diameter:10"
- N.W.(kg):30
- Package size (CM):112x31x29



### D29J015 0.5Ton Pickup Truck crane 27KG

- Capacity: 0.5Ton
- Lifting Height: 1300mm
- N.W.(kg):27



### D29J035 0.5Ton Pickup Truck Crane 37KG

- Capacity: 0.5Ton
- Lifting Height: 2015mm
- N.W.(kg):37



### D29F015 Professional English Wheel

- Large 37-3/4" throat capacity enable users to fabricate compound curves or large pieces;
- Totally three big wheels and nine anvils are available;
- Quick-adjust lower anvil yoke for easy leveling;
- Handles sheet metal to 16 gauge, copper and aluminum to 14 gauge;
- overall dimension: 53"H\*30-7/8"W\*44-1/2"D;
- 90 degree swivel head;
- Detailed instruction manual ;
- Upper roll size: flat, 2-1/4" W\*6" diameter;
- Bottom roll size: 1/8".1/2" and 3/4" edge radius \*6" crown radius; flat with 5/16"\*1/4" step, 1.55"W\*0.65"D groove, 0.82" W\*0.65"D groove and 2 flat rolls.
- N.W.: 78kg



### D29J025 Pickup Truck Crane With Winch 35KG

- Capacity: 0.5Ton
- Lifting Height: 2000mm
- N.W.(kg):35



### D29J045 1Ton Pickup Truck Crane

- Capacity: 1Ton
- Lifting Height: 2015mm
- N.W.(kg):49



### D31A025 Compact Bender

- Mild steel capacity:5/16" 5/4 or 1/4" 2" . metallic paint, flat and good-treat appearance
- Guranteed quality
- N.W.(kg):18



### D31C016 16Ton Hydraulic Pipe Bender

- Capacity:16Ton
- Die Size:1/2,3/4,1,1-1/4,1-1/2,2,2-1/2,3
- N.W.(kg):60
- Constructed of heavy duty steel.
- Hydraulic pipe bender can bend the angle with 90 degrees.



### D33A025 Hydraulic Crimping Tool 50-400mm<sup>2</sup>16Ton

- Crimping range:50-400mm
- Crimping force : 16Ton
- Crimping type : hexagon crimping stroke 22mm
- one pc in one wooden box



### D33B015 10Ton Hydraulic Knockout Punch

- Max Pressure:10Ton
- Max Thickness for Steel: 3.2 mm ( 11 gauge )
- Max Thickness for Stainless Steel: 2 mm ( 14 gauge )
- Ram with 31" High Pressure Hose
- Total Weight: 25 lbs
- Sealing rings



### D31B015 Manual Hydraulic Pipe Bender

- Constructed of heavy duty steel.
- Hydraulic pipe bender can bend the angle with 90 degrees.
- Capacity:10Ton
- Suit: Steel
- Die Size: 1/2",3/4",1",1-1/4",1-1/2",2",3"



### D33A005 Hydraulic Crimper Tool 4-70mm<sup>2</sup> 8Ton

- Max Working Pressure: 8Ton.
- Maximum Working Stroke: 10mm.
- Crimping Type: hexagon.
- Die Size: 4, 6, 8, 10, 16, 25, 35, 50, 70mm<sup>2</sup>



### D33A035 Hydraulic Crimping Tool 16-200mm<sup>2</sup> 16Ton

- Crimping force :16Ton
- Crimping stroke:20mm
- Weight :approx.4.9kg
- Length:approx.470mm
- It is designed with beauty
- Guarantee quality with easy operation
- One pc in one plastic /iron box



### D31C012 12Ton Hydraulic Pipe Bender

- Capacity: 12Ton
- Die Size:1/2,3/4,1,1-1/4,1-1/2,2
- N.W.(kg):36
- Constructed of heavy duty steel.
- Hydraulic pipe bender can bend the angle with 90 degrees.



### D33A015 Hydraulic crimping tool 16-300mm<sup>2</sup> 16Ton

- Description
- Pressure tools KYQ-300A1
- Crimping range:16-300mm<sup>2</sup>
- Crimping force : 16Ton
- Crimping type : hexagon crimping stroke: 22mm
- Mould:16.25.35.50.70.95.120.150. 185.240.300mm
- Packing With iron box or plastic box than paper box.



### D33A115 Hydraulic Crimping Tool 300-1000mm<sup>2</sup> 55Ton

- It is suitable for outside and inside project of the distributor house.
- The Crimping Range Is 300-1000mm<sup>2</sup>
- The Max Pressure Is 55ton
- The Max Travel Is 28mm
- The Accessories Is 300,400,500,630, 800,1000mm
- The Crimping Type Is Besiege Pressure



### D33C021 15Ton Hydraulic Knockout Punch

- Max Pressure:15 ton
- Max Thickness for Steel: 3.2 mm ( 11 gauge )
- Max Thickness for Stainless Steel: 2 mm ( 14 gauge )
- Ram with 50 1/2" High Pressure Hose
- 10pc Dies & Punches : 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3", 3 1/2", 4"
- 2pc Piston Shafts : 4 3/4"L x 3/4"Diam & 3 1/8"L x 3/4"Diam
- 2pc Draw Studs : 4 1/8"L x 0.31"Diam



### D33G035 Multifunction Bus-Bar Machine 30Ton

- The function:cutting,punching and bending phase 50Hz,220V
- Rating oil pressure : 700kgf/cn2
- Cutting power: 25Ton
- Cutting range : copper board/ aluminium board
- Punching power: 30Ton
- Distance from hole to the steel side: 80mm
- Punch range : 10.5, 13.8 ,17 ,20.5
- Bend strength: 25Ton
- N.W.(kg):170



### D33J035 Hydraulic Nut Splitter 12Ton

- Output:12Ton
- Splitting range:20mm
- Hexagon nut range:14,24mm
- Bolt range:M8-M16mm
- Size: 470\*135\*80mm
- N.W.(kg):3.6



### D33D025 Hydraulic Busbar Bending Tool

- Punching Force:25Ton
- Bending Max.Thickness:12mm
- Bending width:300mm
- Package:Wooden box
- Bending for metal bars
- Easy to carry and simple to operate.
- Bended bars not changed
- N.W.(kg):35



### D33H035 Hydraulic Rebar Cutter 18Ton

- Voltage:220/110v
- Wattage;1000 / 1350 w
- Cutting speed:3.5s
- Max .rebar:22mm
- Min.rebar:4mm
- Cut power:18Ton
- Carton size:485\*190\*330mm
- Machine size:420\*120\*230 mm
- N.W.(kg):15



### D33K035 2Ton Shop Crane

- Spreader force: 14Ton
- Thickness of Tip: 6.5mm
- Max. Spreading Distance: 81mm
- Oil capacity: 78ml
- Working type: hydraulic pressure
- N.W.(kg):7.1



### D33E035 Hydraulic busbar punching tool 31Ton

- Punch Force 31Ton
- Max thickness of sheet 10mm of copper sheet / 6mm of metal sheet
- Depth of throat 95mm
- Height 390mm
- N.W.(kg):17.5
- Accessories 3/8", 1/2", 5/8", 3/4"



### D33I035 Hydraulic wire cutter 7Ton

- Cutting force:7Ton
- Cutting range: 30mm
- Package:carton
- Hydraulic Steel Rope Cutter CPC-30A
- Steel rope Ø22
- N.W.(kg):3.8



### D33L035 5Ton Hydraulic Puller

- Rated output 5Ton
- Max.spread 200mm
- Max.stroke 50mm
- N.W.(kg):7.5
- Volume 44x38x32cm
- It is mainly disassembled the bearing and shaft tool and also can be remove all kinds of mechanical equipment of pulley, gears, bearings and so on



### D33L043 10Ton Hydraulic Puller

- Max Capacity: 10Ton.
- Min/Max Reach: 0 - 150mm.
- Min/Max Spread: 100 - 240mm



### D95X025 1000LB Load Leveler

- 2T Floor Jack
- Capacity:2Ton
- Min.Height: 135mm
- Max.Height: 335mm
- 2T Jack stand
- Capacity:2T
- Min.Height: 268mm
- Max.Height: 425mm
- N.W.(kg): 13.5



### D97W013 Hydraulic Oil Filler Breather Filter

- 81 mm Filler breather filter
- Provides 50 micron filtration against air-borne contaminants.
- Wire mesh material: Stainless Steel
- Net weight: 0.21 KGS



### D33M011 Hydraulic Tube Expanding Tool Kit

- 11 Tube sizes: 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2", 1-5/8".
- OD soft copper tubing.
- Includes: tubing cutter 3/16" to 1-5/8" cutting capacity and tubing reamer



### D95X035 3Ton Combination Kit

- 3T Floor Jack
- Capacity:3Ton
- Min.Height: 135mm
- Max.Height: 365mm
- 3T Jack stand
- Capacity:3T
- Min.Height: 285mm
- Max.Height: 428mm
- N.W.(kg): 41



### D033M035 750LB Load Leveler

- Expanding range: 10-28mm
- Allocated mould: 10,12,16,19,22,25,28mm(3/8", 1/2", 5/8", 3/4", 7/8", 1", 1 1/8")
- Wall thickness of pipe: 1mm
- N.W.(kg):3.5



### D97W011 Hydraulic Oil Filler Breather Filter

- 54 mm Filler breather filter
- Provides 50 micron filtration against air-borne contaminants.
- Wire mesh material: Stainless Steel
- Net weight: 0.08 KGS

